
 DPEX-R30

INS 439097

ENGINEERING
RESEARCH
LABORATORY
OCTOBER 1952

LOGARITHMIC ELECTROMETER

E. I. DU PONT DE NEMOURS & COMPANY, INC.
ENGINEERING DEPARTMENT
WILMINGTON, DELAWARE

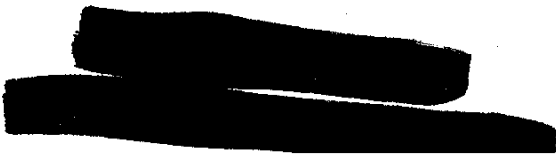

This document was prepared in conjunction with work accomplished under Contract No. AT(07-2)-1 with the U.S. Department of Energy.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

This report has been reproduced directly from the best available copy.

Available for sale to the public, in paper, from: U.S. Department of Commerce, National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161, phone: (800) 553-6847, fax: (703) 605-6900, email: orders@ntis.fedworld.gov online ordering: <http://www.ntis.gov/ordering.htm>

Available electronically at <http://www.doe.gov/bridge>

Available for a processing fee to U.S. Department of Energy and its contractors, in paper, from: U.S. Department of Energy, Office of Scientific and Technical Information, P.O. Box 62, Oak Ridge, TN 37831-0062, phone: (865) 576-8401, fax: (865) 576-5728, email: reports@adonis.osti.gov

Contract No.
Account No. 8980-ED-10-768

Serial No. DPEX-R30

E. I. DU PONT DE NEMOURS & COMPANY
ENGINEERING DEPARTMENT
Development Engineering Division
Engineering Research Laboratory

WILMINGTON, DELAWARE

October 1952

This report contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, U.S.C., Sec. 793 and 794, and the transmission or revelation of which in any manner to an unauthorized person is prohibited by law.

LOGARITHMIC ELECTROMETER

By

J. M. Morris

ABSTRACT

This report describes the development and design details of an instrument that measures current in the range 10^{-6} to 10^{-13} a. and indicates or records this current on a single logarithmic scale.

DECLASSIFIED	
DOES NOT CONTAIN	
UNCLASSIFIED CONTROLLED	
NUCLEAR INFORMATION	
ADC & RO:	<i>SM Price</i> Date: <i>4/12/93</i>
S.M. Price, Supv., Doc. Acqy	

[REDACTED]

DISTRIBUTION LIST

Report No. DPEX-R30

Date October 1952

Series

Subject Category

Copy No.		
1-5	L. Squires	Explosives Department Wilmington
6	J. B. Tinker	" " "
7	"W" File	" " "
8	W. P. Overbeck	" " Savannah River
9	J. W. Croach	Argonne National Laboratory
10-11	M. H. Wahl	Technical Division Savannah River
12	J. A. Burns	Engineering Department Wilmington
13	G. P. Church	" " "
	Engr. Dept.-AE File }	" " "
14	F. H. Trapnell	Engineering Department Louviers
15	ERL-AE File	Engineering Department Wilmington
16	C. M. Cooper	" " "
	C. E. Daniels	" " "
	T. H. Chilton	" " "
	ERL-AE File }	" " "
	In	
	Turn	
17-23	H. J. Bowman	Explosives Department Savannah River

[REDACTED]

TABLE OF CONTENTS

	<u>Page</u>
DISTRIBUTION LIST	2
I. SUMMARY	4
Problem Under Investigation	4
Results	4
Recommendations	4-5
II. DISCUSSION	6
Reasons for Investigation	6
Course Pursued During Investigation	6
A. Logarithmic Transformation Techniques.	6
B. Development of Instrument	7
1. Reasons for Selecting Model V	
Beckman Meter	7
2. Operation of Beckman Model V	
Micromicroammeter	8
3. Logarithmic Modifications	8
C. Dynamic Characteristics of Instrument.	9
D. Availability of Instrument	10
E. Accessory Equipment	10
III. APPENDIX	
Current-Voltage Characteristics in 9004	Figure 1
Simplified Diagram Beckman Model V	
Micromicroammeter	Figure 2
Circuit Diagram Logarithmic Electrometer	Figure 3
Circuit Diagram Beckman Model Logarithmic	
Electrometer	Figure 4
Dynamic Response of Logarithmic	
Micromicroammeter	Table I
Analysis of Micromicroammeter	Exhibit A-1
	and
	Exhibit A-2
IV. BIBLIOGRAPHY	18

LOGARITHMIC ELECTROMETER

ENGINEERING DEPARTMENT

DEVELOPMENT ENGINEERING DIVISION

ENGINEERING RESEARCH LABORATORY

I. SUMMARY

A. PROBLEM UNDER INVESTIGATION

It is frequently desirable to measure a wide range of low current values without range switching. Since no instrument with such characteristics is commercially available, this study was made to determine whether or not the Beckman Model "V" Micromicroammeter could be modified to provide a logarithmic response.

B. RESULTS

1. Simple modifications permit the Beckman Model V Micromicroammeter of the type that is employed at the Savannah River Plant, to be made logarithmic over as many as six decades in the current range of 10^{-13} to 10^{-6} a. Instabilities and drifts in the modified instrument are less than one per cent of full scale meter movement.

2. Beckman Instruments, Inc. has agreed to supply the modified instrument at a cost of \$975. The standard linear Micromicroammeter costs \$550.

3. A period meter that operates in conjunction with the logarithmic instrument was developed and will be described in another report.

C. RECOMMENDATIONS


The feasibility of operating this instrument over six decades of input current has been demonstrated. As many as seven decades can be accommodated if a slight non-linearity in the lowest decade is tolerable. This non-linearity is insignificant in most applications. Fewer decades with increased readability and precision can also be obtained.

[REDACTED]

Since range changing is not necessary when using a logarithmic instrument, and no errors due to applying the incorrect range to the meter reading can occur, a logarithmic instrument provides a useful service in many applications. It is recommended that logarithmic Beckman micromicroammeters be used as follows:

1. A 6-decade instrument in reactor areas where wide range is required and period (easily obtained from a logarithmic instrument) is a useful measurement.
2. A 2 or 3-decade instrument in 200 Area operations where measurements over this range are common and frequent range changing may present serious problems.

Prepared by:

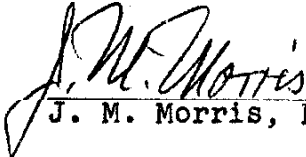
J. M. Morris, E.R.L.

Submitted by:


H.C. Vernon, Asst. Dir. AE, ERL

II. DISCUSSION

REASONS FOR INVESTIGATION

Since many of the Savannah River Plant operations require the measurement of ion-chamber currents over a range that is too great to be measured on a single linear scale, it is necessary either to provide a large number of ranges on the measuring instrument or to compress the scale so that an indication proportional to some function of the current can be seen over the entire operating range. For highest accuracy of measurement a range changing switch is provided on the Beckman Model V Micromicroammeter, the standard ion-chamber current measuring instrument at the Savannah Plant. The output indication or recording does not reflect the range setting of the input of the instrument so that it is possible to make errors by noting the incorrect instrument range. Furthermore, when ranges are changed, transients are produced which can be objectionable if the output of the instrument operates safety circuits.

It therefore appeared desirable to accept a sacrifice in precision by eliminating range changing and by providing a compressed scale of the logarithmic type to avoid possible errors of range setting and to eliminate the transients that are produced by range changing. Furthermore, the output from a logarithmic meter can be differentiated electronically to obtain a period measurement which is very desirable for the control of the reactor.

Since a number of logarithmic instruments may be employed in both the reactor and separations buildings it was desirable to create a source of supply. The circuits and techniques described in this report were transmitted to the Beckman Instrument Company which is now in a position to supply these instruments.

COURSE PURSUED DURING INVESTIGATION

A. LOGARITHMIC TRANSFORMATION TECHNIQUES: It has been shown (1) that for currents less than 200 μ a., the current in a thermionic diode whose anode is negative with respect to its cathode is

$$I = I_0 e^{-\frac{V\epsilon}{kT}} \quad (1)$$

where I_0 is the saturation current (in which T is the only variable), V is the anode potential, ϵ is the charge on an electron, k is Boltzmann's constant, and T is the

[REDACTED]

absolute cathode temperature. Eq. (1) may also be written,

$$I = I_0(T) e^{-\frac{V_0}{kT}}$$

Taking logarithms

$$\ln I = \ln I_0 - \frac{e}{kT} V \quad (2)$$

If the voltage proportional to $\ln I_0$ is bucked out, a voltmeter which measures anode voltage can be calibrated directly in terms of the logarithm of anode current. The above equation is not valid for currents greater than about 200 μ a. because the effect of space charge becomes appreciable. At currents in the order of 3×10^{-14} a. internal leakage of the diode sets a practical lower limit to the logarithmic relationship.

In logarithmic circuits the 9004 acorn-type diode has been used successfully⁽²⁾ in the past because of its low internal leakage. This is important because leakage contributes an error in measured voltage which is proportional to anode current. Figure 1 shows the current-voltage relationship in a 9004 at different filament potentials. The graph indicates that with varying cathode temperatures (filament voltages) the slope of the line varies only slightly, whereas the intercept varies appreciably. This indicates the importance of maintaining a well-regulated filament supply. From the graph it also can be seen that the impedance of the diode varies from 10^6 to 10^{13} ohms throughout the operating range. This impedance variation is insignificant when the current source is a phototube or an ionization chamber, both of which have high internal impedances. However, if the current source does not have an impedance at least as large as that of the diode, considerable error will result since part of the total current flow will be determined by the diode impedance. For a discussion of the effect of source impedance see Exhibit A in the Appendix.

B. DEVELOPMENT OF INSTRUMENT

1. Reasons for Selecting Model V Beckman Meter: A voltmeter which measures diode anode voltage can be calibrated directly in terms of the logarithm of anode current provided the internal leakage of the diode is low, the source impedance is high, and the impedance of the voltmeter is high. In Project 25606, "Electrometer Evaluation", undertaken by this laboratory to evaluate commercially available electrometers, the Beckman Model V Micromicroammeter, a vibrating-capacitor electrometer, was selected for use at the Savannah River plant because of its simplicity, low cost, and good performance. This instrument was therefore selected for the

logarithmic circuit so that field maintenance problems would not be unduly complicated by an additional type of instrument.

2. Operation of Beckman Model V Micromicroammeter:

The circuit principles of the Beckman Model V Micromicroammeter⁽³⁾ are shown in the block diagram of Figure 2. The current to be measured flows through the input resistor (whose value is $10^7 - 10^{13}$ ohms depending upon the current range) and produces a voltage drop across it. Since the feedback resistor is relatively small (500 - 10,000 ohms), the voltage developed across it by the signal current does not contribute a measurable error. The signal voltage across the input resistor is converted to a.c. by the vibrating capacitor, is then amplified and demodulated, resulting in a d.c. output current proportional to the input signal current. This current flows in such a direction that the voltage drop which it produces in the feedback resistor equals the signal voltage except for an error of about 1 mv. in 100 - 3000 mv. depending on the feedback resistor. This feedback current is indicated on the instrument meter which is calibrated in terms of input current and it also provides a signal for a 50 mv. recording potentiometer by means of a suitable voltage dropping resistor. Range on the instrument is changed by switching input resistors, and voltage sensitivity is changed by switching feedback resistors. The full scale current range of the instrument is determined by Ohm's law, $I = E/R$ where E is the voltage sensitivity of the instrument and R is the input resistor.

3. Logarithmic Modifications: The conversion of the linear multirange instrument to one having an indication proportional to the logarithm of the input current was achieved by making the following changes:

a. The input resistor was replaced with a 9004 diode mounted on a Teflon support inside the isothermal housing in the instrument.

b. The diode was biased to buck out the constant term $\ln I_0$ in Equation (2).

c. The diode filament was operated with d.c. to prevent hum pickup in the high-impedance input circuit.

d. The diode filament was operated at a reduced voltage of 3.5 volts to reduce anode photoemission.

e. A feedback resistor was selected to give a six-decade current range.

Initially the 6.3 volt winding on the built-in constant voltage transformer was used with a full-wave bridge rectifier to provide regulated d.c. at 3.5 volts for the diode filament.

[REDACTED]

The proper size feedback resistor for a six-decade current range was found by trial and error to be 9500 ohms. This was done by observing the meter deflection with currents of 10^{-12} and 10^{-6} amp. for different values of feedback resistor.

At this stage of the development, the instrument oscillated in portions of its measuring range. In the standard Beckman instrument stability is achieved by inserting a phase-correcting network in the feedback loop to critically damp the high-gain loop to prevent oscillation. Different phase-correcting networks are used for the various current ranges. Since there is no range change in the logarithmic instrument, one network must suffice for the entire range. Phase correction with a time constant that varies with current level was achieved by shunting the diode with a 150 μ f. polystyrene capacitor, which in conjunction with the variable resistance of the diode, provided a varying time constant of the proper amount to prevent oscillation. To increase the damping further so as to provide a wider margin of stability, a 1500-ohm resistor (R_D in Figure 3) was inserted in the demodulator circuit to increase its time constant. This change increased the full-scale response time of the instrument from one second to about three seconds. Since six decades of current are covered, however, the response of the logarithmic instrument is still faster than that of the standard instrument.

The circuit should be adjusted by positioning the 50-ohm rheostat until 3.5 volts is applied to the diode filament. The 1000-ohm potentiometer is then adjusted until small (about 10°) changes in the 50-ohm rheostat setting cause no change in meter or recorder indication. Since appreciable time is required for the diode filament to reach a new temperature when its voltage is changed, it is necessary to delay the compensation correspondingly. The time constant of the 3000 μ f. capacitor in conjunction with the source impedance of the compensating network is approximately that of the thermal inertia of the cathode so that compensation is supplied at the same rate that the zero tends to shift. The zeroing potential of 5 volts is obtained from point "C" on the regulated series filament string.

C. DYNAMIC CHARACTERISTICS OF INSTRUMENT: The response of the instrument to sudden step-changes in the input current is shown in Table I. It can be seen that, for positive changes, the instrument responds rapidly. However, for negative step-changes of 10^4 the response is slow. This is because the cable and input capacities charge negatively from the feedback circuit and the diode cuts off so that the only discharge path is through the leakage resistance of the diode. On positive step-changes of input current this effect does not appear because the diode conducts at all times. In plant


[REDACTED]

use the slow response to large negative changes will never be encountered since the current can never decrease by a factor of more than 100 over the period of one second.

D. AVAILABILITY OF INSTRUMENT: The Beckman Instrument Company will furnish these instruments according to the specifications supplied by this laboratory. As supplied, the instrument will include calibration check points which introduce standard current values in the input circuit. The meter face is calibrated logarithmically and the instrument can be supplied with ranges of from one to six decades. Figure 4 is a diagram of a six-decade instrument supplied by Beckman.


E. ACCESSORY EQUIPMENT: A period meter and alarm circuit was developed in conjunction with the logarithmic micromicroammeter and will be described in another report. A logarithmic count-rate meter was also developed and will be described separately.

FIGURE 1

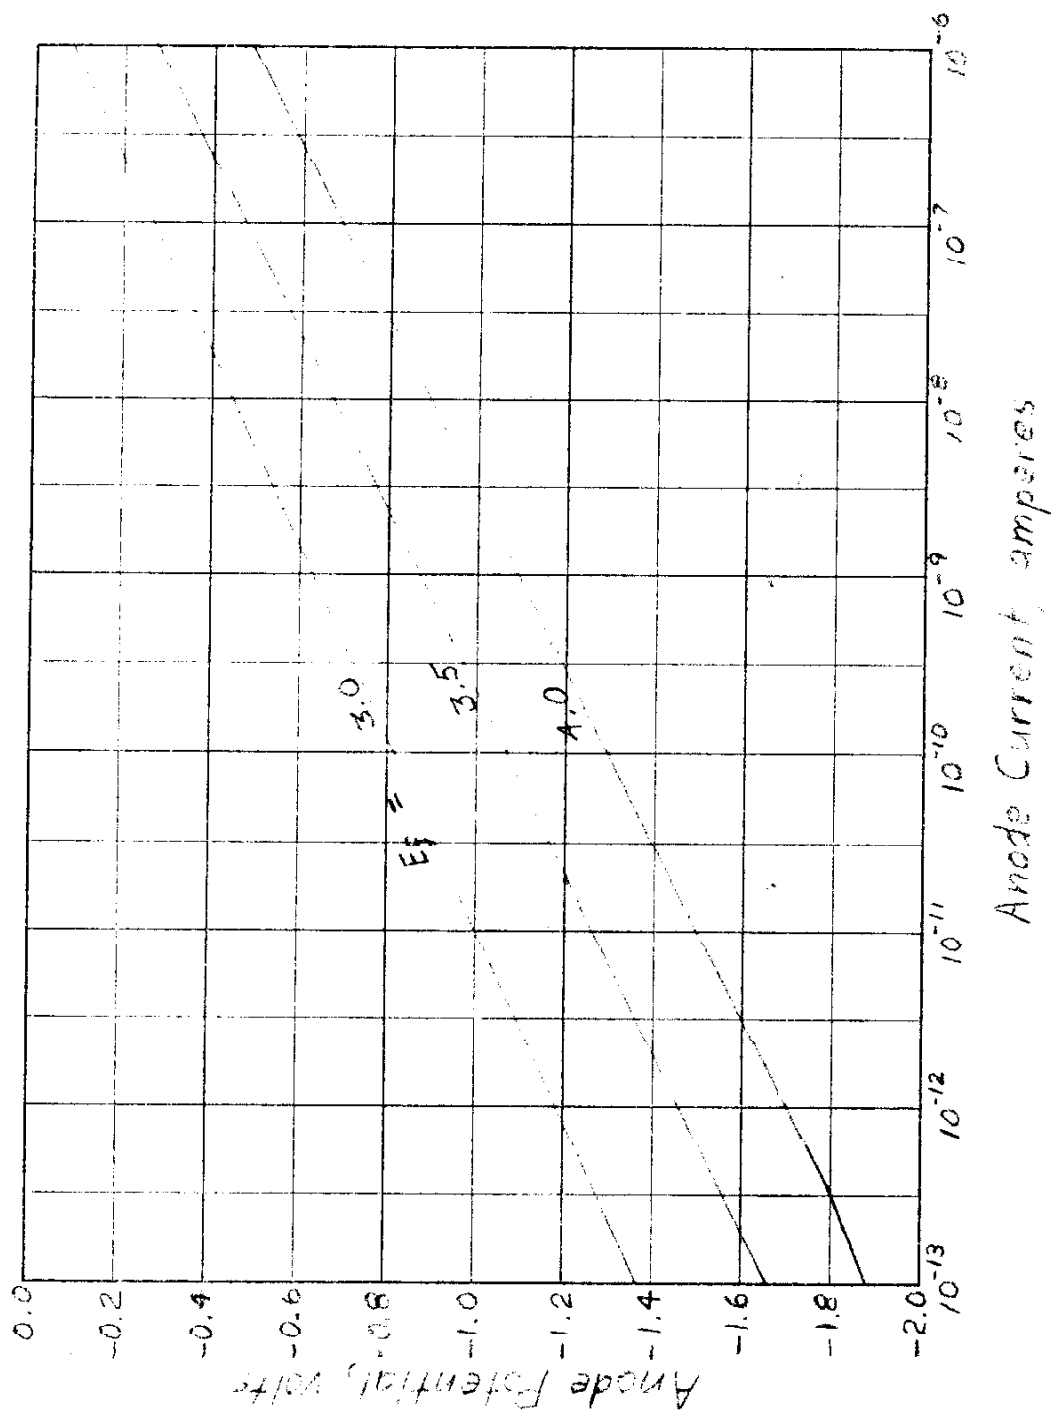

E. I. DU PONT DE NEMOURS & CO. (INC.)		ENGINEERING RESEARCH LABORATORY
TITLE: PLATE CURRENT 9004 DIODE		PROJ. NO. 8980-71-14-780
DRAWN BY J.M.M.	DATE 10-20-52	SHEET NO

FIGURE 2

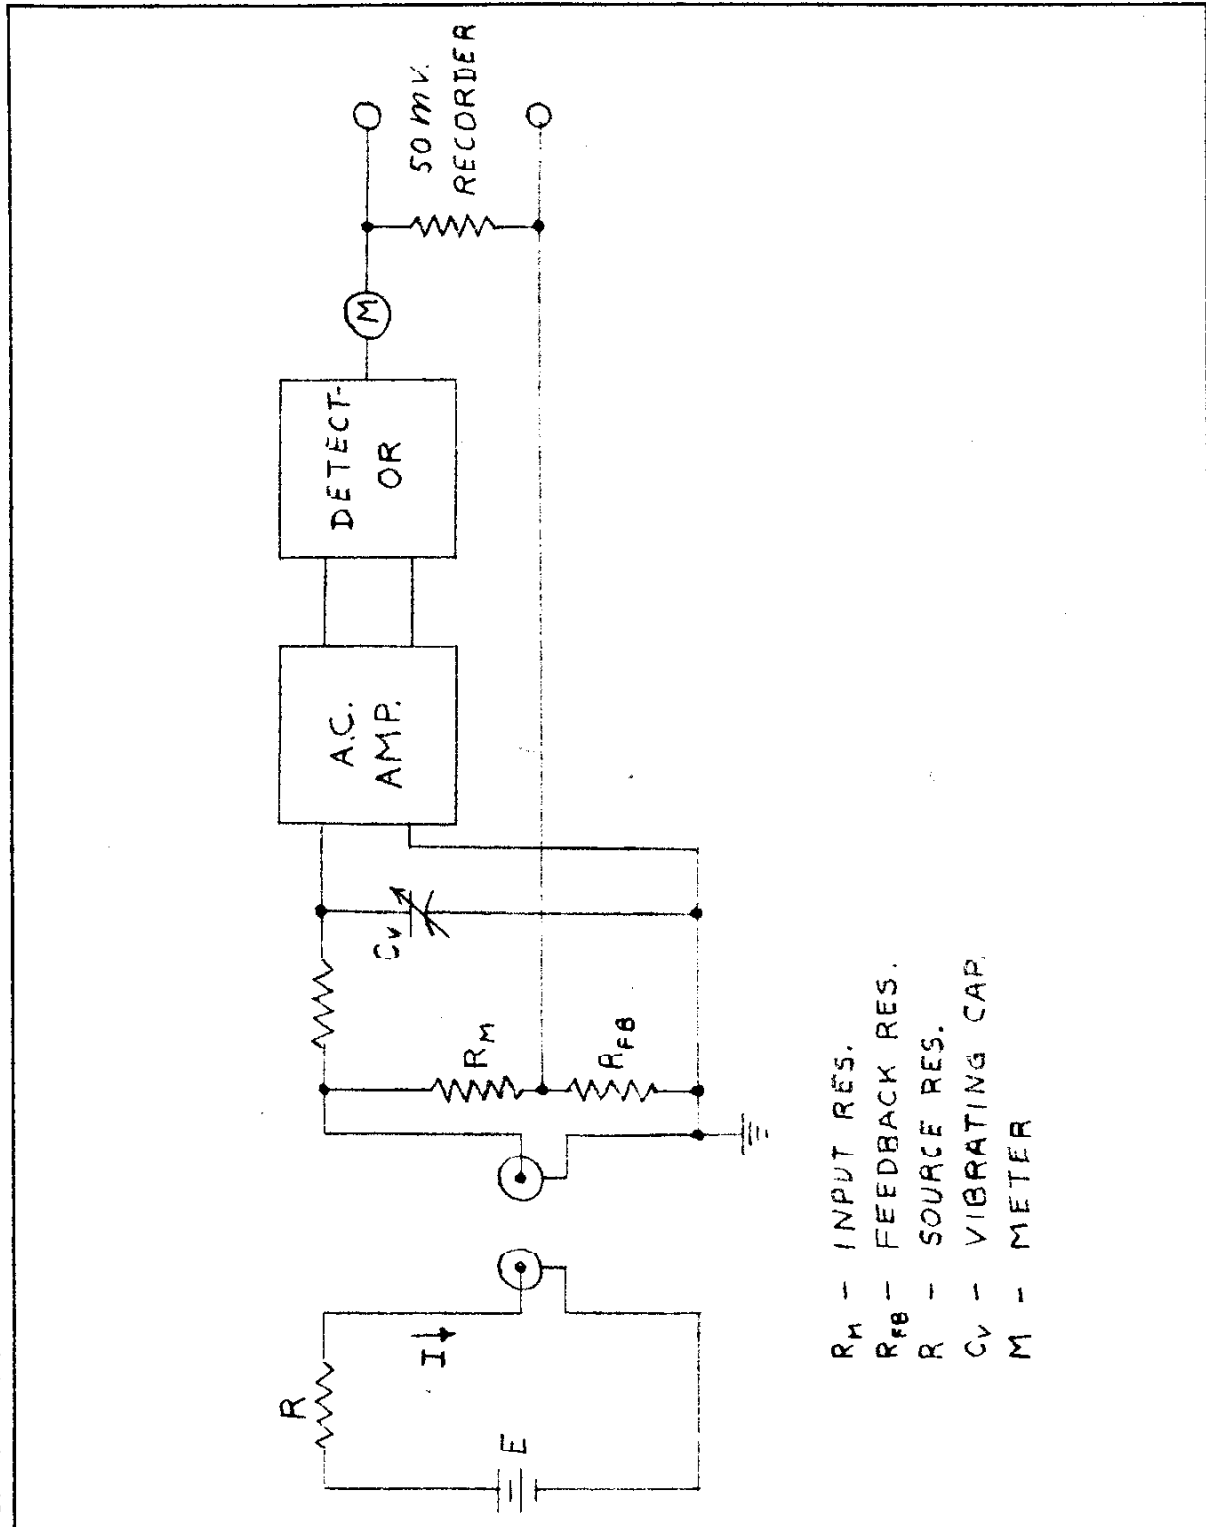

E. I. DU PONT DE NEMOURS & CO. (INC.)

ENGINEERING RESEARCH LABORATORY

TITLE: SIMPLIFIED DIAGRAM BECKMAN MODEL V


PROJ. NO. 5980-71-14-780

DRAWN BY J.M.M.

SCALE

DATE 2-24-53

SKETCH NO.

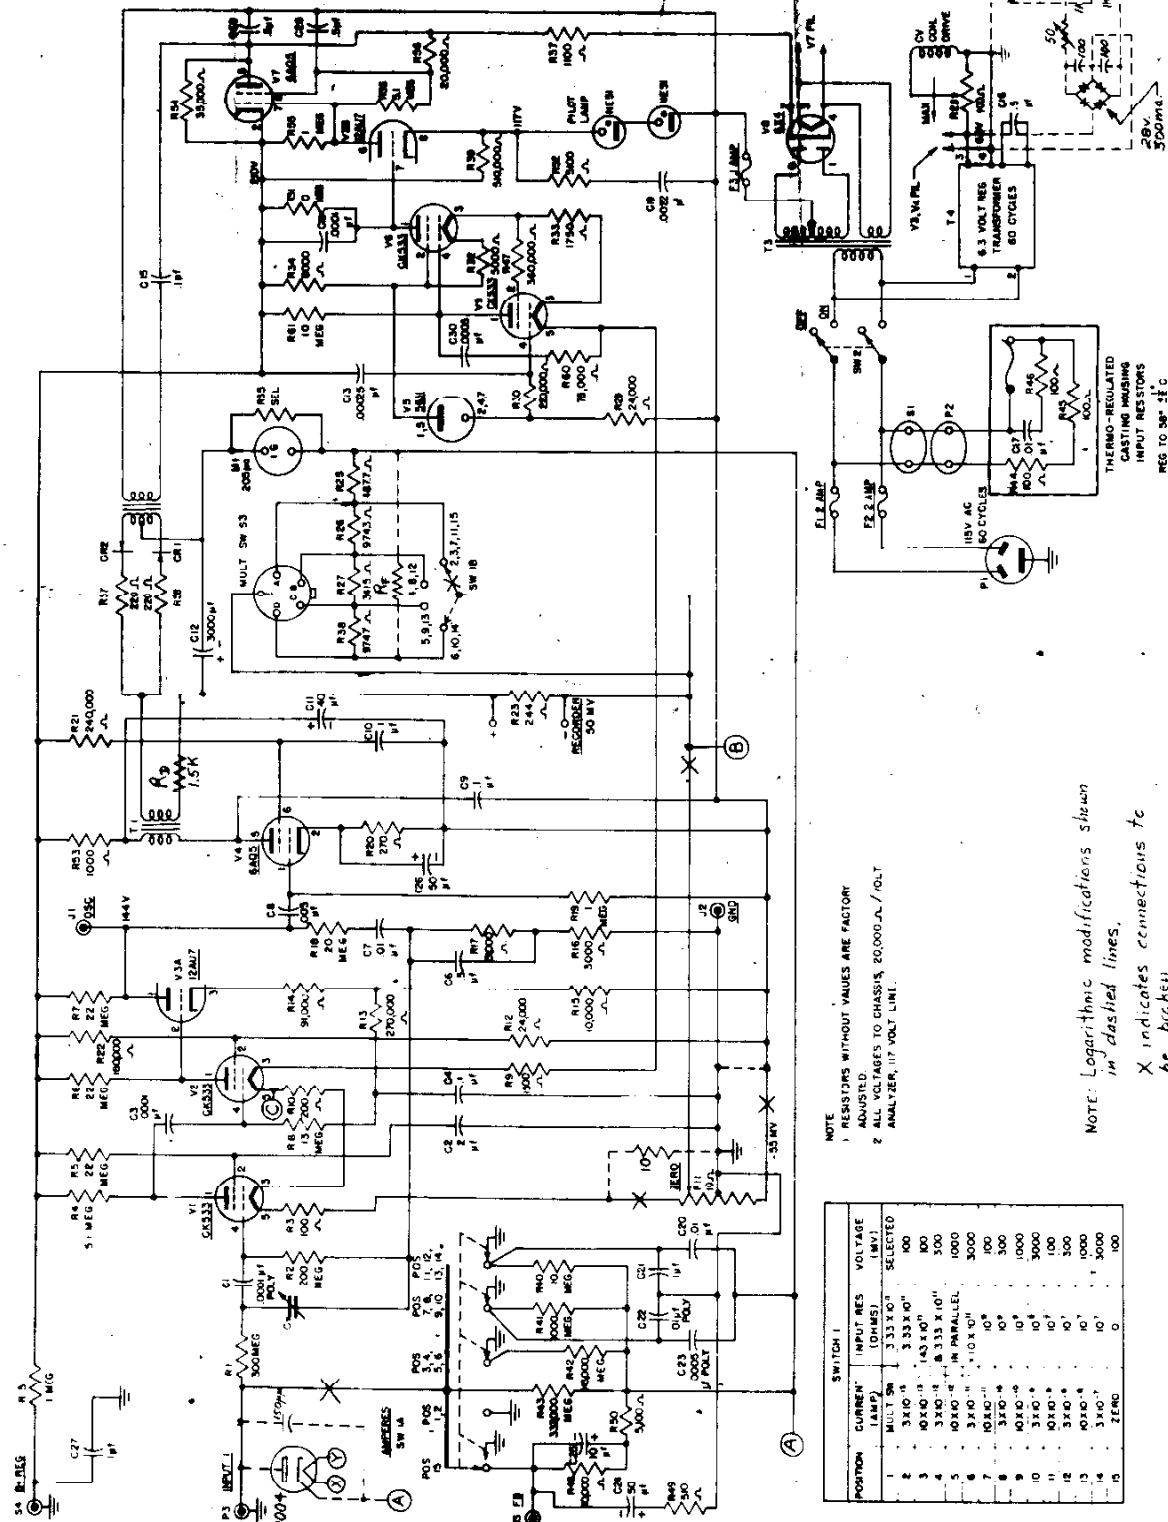

NOTE
1 RESISTORS WITHOUT VALUES ARE FACTORY ADJUSTED.
2 ALL VOLTAGES TO CHASSIS, 20,000 Ω / ΩLT ANALYZER, 117 VOLT LINE.

SWITCH 1			
POSITION	CURRENT (AMP)	INPUT RES (OHMS)	VOLTAGE (MV)
1	MULT SW	3,333 Ω	100
2	3,333 Ω	3,333 Ω	100
3	10,000 Ω	10,000 Ω	300
4	3,333 Ω	3,333 Ω	500
5	10,000 Ω	10,000 Ω	1,000
6	3,333 Ω	3,333 Ω	3,000
7	10,000 Ω	10,000 Ω	10,000
8	3,333 Ω	3,333 Ω	30,000
9	10,000 Ω	10,000 Ω	100,000
10	3,333 Ω	3,333 Ω	300,000
11	10,000 Ω	10,000 Ω	1,000,000
12	3,333 Ω	3,333 Ω	3,000,000
13	10,000 Ω	10,000 Ω	10,000,000
14	3,333 Ω	3,333 Ω	30,000,000
15	ZERO	0	0

NOTE: Logarithmic modifications shown in dashed lines.
X indicates connections to be broken.
① Points with like letters to be connected.

THIS DIAGRAM APPLIES TO SERIAL NO. 68440 THRU

NAME	DATE	BY	CHKD
DESIGNED BY	DATE	BY	CHKD
APPROVED BY	DATE	BY	CHKD
BECKMAN INSTRUMENTS, INC.			
CIRCUIT DIAGRAM			
VIBRATING REED INALMETER			
DWG. NO. D-5400-4			

LOGARITHMIC MODIFICATIONS TO STANDARD MICROMICROAMMETER

[REDACTED]



BECKMAN LOGARITHMIC ULTRASONIC AMMETER

DECKMAN INSTRUMENTS, INC.
CIRCUIT DIAGRAM
PAGE 11 - 11

TABLE I

DYNAMIC RESPONSE OF LOGARITHMIC MICROMICROAMMETER

INPUT CURRENT CHANGE

Capacity	<u>10⁻⁸ — 10⁻¹⁰</u>		<u>10⁻¹⁰ — 10⁻¹²</u>		<u>10⁻⁸ — 10⁻¹²</u>	
	Pos.	Neg.	Pos.	Neg.	Pos.	Neg.
0 $\mu\text{mf.}$	4 sec.	3 sec.	4 sec.	15 sec.	8	43 sec.*
250 $\mu\text{mf.}$	4 sec.*	4 sec.*	5 sec.*	15 sec.	8	56 sec.*
2000 $\mu\text{mf.}$	5 sec.	15 sec.*	7 sec.*	16 sec.	8	8 min.*

* Overshoot in form of underdamping

ANALYSIS OF MICROMICROAMMETER
(Refer to Figure 2)

Assume $R_{FB} \ll R_M$

$$G = \frac{E_{FB}}{E - IR}$$

$$I = \frac{E + E_{FB}}{R + R_M} \quad (1)$$

$$E_{FB} = G \left[\left(\frac{E + E_{FB}}{R + R_M} \right) R_M - E_{FB} \right] \quad (2)$$

$$E_{FB} (R + R_M) = GR_M (E + E_{FB}) - GE_{FB} (R + R_M)$$

$$E_{FB} \left[(R + R_M) + G(R + R_M) - GR_M \right] = GR_M E$$

$$E_{FB} = E \frac{GR_M}{R + R_M + GR} \quad (3)$$

$$\frac{E}{E_{FB}} = \frac{R + R_M + GR}{GR_M} \quad (4)$$

$$\begin{aligned} R_{input} &= \frac{E_{input}}{I} = \frac{IR_M - E_{FB}}{I} = R_M - \frac{E_{FB}}{E + E_{FB}} (R + R_M) \\ &= R_M - \frac{R + R_M}{\frac{E}{E_{FB}} + 1} \end{aligned} \quad (5)$$

from (4) and (5)

$$\begin{aligned} R_{input} &= R_M - \frac{R + R_M}{\frac{R + R_M + GR}{GR_M} + 1} = R_M - \frac{(R + R_M)GR_M}{R + R_M + GR + GR_M} \\ &= R_M \left(\frac{1}{1 + G} \right) \end{aligned} \quad (6)$$

$$\text{but Error} = \frac{\frac{E}{R} - \frac{E}{R+R_{in}}}{\frac{E}{R}} = 1 - \frac{R}{R+R_{in}} = \frac{R_{in}}{R+R_{in}} \quad (7)$$

from (6) and (7)

$$\text{Error} = \frac{R_M \left(\frac{1}{1+G} \right)}{R + R_M \left(\frac{1}{1+G} \right)} = \frac{R_M}{R(1+G) + R_M} = \frac{1}{\frac{R}{R_M} (1+G) + 1} \quad (8)$$

But G varies from about 2000 to about 70 depending upon the feedback resistor used. If the tolerable error is 1% and the gain is 70

$$\frac{R}{R_M} > \frac{1}{0.01(71)+1} = \frac{1}{1.71}$$

$$\text{or } \frac{R}{R_M} > 0.59$$



IV. BIBLIOGRAPHY

1. Harnwell and Livingood, "Experimental Atomic Physics,"
New York, McGraw-Hill, 1933
2. James, W. G., "Logarithms in Instrumentation,"
ORNL-413, 1950
3. "Operating Instructions for the Beckman Model V
Micromicroammeter," Bulletin 271-B, Beckman
Instruments, Inc., South Pasadena, Calif.