

SANDIA REPORT

SAND2008-4924

Unlimited Release

Printed August 2008

New Paradigm: Controlling Initiation Phase is Necessary for Optimization of Wire-Array Z-Pinch Performance

G.S. Sarkisov, S.E. Rosenthal, T.W.L. Sanford, and P.V. Sasorov

Prepared by
Sandia National Laboratories
Albuquerque, New Mexico 87185 and Livermore, California 94550

Sandia is a multiprogram laboratory operated by Sandia Corporation,
a Lockheed Martin Company, for the United States Department of Energy's
National Nuclear Security Administration under Contract DE-AC04-94AL85000.

Approved for public release; further dissemination unlimited.



Sandia National Laboratories

Issued by Sandia National Laboratories, operated for the United States Department of Energy by Sandia Corporation.

NOTICE: This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government, nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, make any warranty, express or implied, or assume any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represent that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government, any agency thereof, or any of their contractors or subcontractors. The views and opinions expressed herein do not necessarily state or reflect those of the United States Government, any agency thereof, or any of their contractors.

Printed in the United States of America. This report has been reproduced directly from the best available copy.

Available to DOE and DOE contractors from
U.S. Department of Energy
Office of Scientific and Technical Information
P.O. Box 62
Oak Ridge, TN 37831

Telephone: (865) 576-8401
Facsimile: (865) 576-5728
E-Mail: reports@adonis.osti.gov
Online ordering: <http://www.osti.gov/bridge>

Available to the public from
U.S. Department of Commerce
National Technical Information Service
5285 Port Royal Rd.
Springfield, VA 22161

Telephone: (800) 553-6847
Facsimile: (703) 605-6900
E-Mail: orders@ntis.fedworld.gov
Online order: <http://www.ntis.gov/help/ordermethods.asp?loc=7-4-0#online>



SAND2008-4924
Unlimited Release
Printed August 2008

New Paradigm: Controlling Initiation Phase is Necessary for Optimization of Wire-Array Z-Pinch Performance

G.S. Sarkisov

Ktech Corporation
10800 Gibson Blvd. SE
Albuquerque, NM 87123

S.E. Rosenthal

ICF Target Design Department
Sandia National Laboratories
Albuquerque NM 87185-1186

T.W.L. Sanford

Diagnostics and Target Physics Department
Sandia National Laboratories
Albuquerque NM 87185-1196

P.V. Sasorov

Institute of Theoretical and Experimental Physics
Moscow 117218, Russia

ABSTRACT

The initiation phase of a wire-array is of paramount importance for achieving an axially homogeneous z-pinch and reproducible, high x-ray power. The significance of wire-array initiation during current prepulse for z-pinch performance has not been widely acknowledged. To achieve new levels of progress in wire-array z-pinch physics it is necessary to accept the importance of initiation physics, and to implement diagnostics of array initiation. This communication provides a brief review pointing out the need to control the initiation phase of a wire array for optimum z-pinch performance, and suggesting why multi-MA wire-array z-pinch experiments fail to meet MHD expectations.

CONTENTS

I. Introduction.....	7
II. Polarity Effect.....	7
III. Current-rate Effect.....	7
IV. Ablation Symmetry vs. Core Condition.....	8
V. Cold Core vs. Hot Core.....	8
VI. Conclusion.....	9
VII. References.....	11
VIII. Appendix.....	13

FIGURES

1. Experimental setup with flashover switch and prepulse B-dot for ZR.....	13
2. Experimental setup for monitoring of the light emission symmetry at ZR.....	14

I. INTRODUCTION

The most powerful laboratory source of x-ray radiation is based on the wire array z-pinch [1]. An axial plasma column is formed from the individual ablating metal wires comprising the array. The degree of magnetic compression of the axial plasma cylinder depends on both its azimuthal and axial symmetries, with improved symmetry resulting in increased x-ray power. The azimuthal symmetry of a z-pinch depends essentially on the number of wires comprising the array: a larger number of wires leads to better azimuthal symmetry [2,3]. A z-pinch's axial symmetry primarily depends on the wire-array initiation. We do not consider in this brief communication the issue of small-scale axial inhomogeneity that should also be controlled to get good compression and high x-ray power. Recent investigations [4,5] show two main wire-initiation effects during the current prepulse that impact the axial symmetry of ablation of the wire array: the polarity effect [6,7,8] and the current rate effect [9,10,11].

II. POLARITY EFFECT

Effective Joule heating of a wire core occurs up to the moment of plasma generation (breakdown). After breakdown the current switches from the wire core to a low-resistance plasma surrounding the wire. Before breakdown, a strong radial electric field can enhance or prevent electronic emission from the hot wire surface. Enhanced electronic emission contributes to earlier breakdown of surrounding vapor. The moment of breakdown varies along the wire length due to axial variation of the radial electric field. Later breakdown enables higher temperature of the wire core by prolonged Joule heating. Hence, an axial variation of the radial electric field maps to an axial variation of the wire temperature at breakdown- the so-called polarity effect [6,12].

III. CURRENT-RATE EFFECT

Faster energy deposition into a metal wire leads to more energy absorption before breakdown. This behavior constitutes the current rate effect [9], and it is related to the inertia of metal/impurities vaporization. Joule heating by a faster current brings the wire to a higher temperature before a breakdown-level vapor density has time to develop

around the wire. Higher temperature of the wire core also reduces the polarity-effect induced inhomogeneity [13].

IV. ABLATION SYMMETRY VS. CORE CONDITION

After breakdown a wire core remains in either a solid, melt, liquid, or a vaporized state [13]. Breakdown that occurs during melting produces the greatest disturbance to axial ablation symmetry. A melting wire is axially phase-inhomogeneous [13]. Liquid metal expands in the form of submicron drops surrounded by vapor [14]. The melted parts of the wire expand and ablate faster than its solid parts, because the ablation rate is proportional to the ablating surface [15]. In contrast, an axially uniform homogeneous ablation has been observed from wire cores that were totally in a hot liquid state at breakdown [5]. Breakdown during a hot liquid state can be achieved by applying an appropriately fast-rising prepulse current. The optimal current rate per wire must be appropriate for transforming wire cores to a *hot liquid state*, and depends on metal type [9]: it is relatively fast ($dI/dt \sim 100\text{-}150$ A/ns/wire) for refractory metals like W; and slower ($dI/dt \sim 20\text{-}50$ A/ns/wire) for non-refractory metals like Al, with a wire diameter $\sim 10\text{-}20$ μm for either metal. An applied current rate high enough to rapidly transform the wire cores into a gas-plasma state will eliminate the uniformity of the ablation phase [5], leading to an axially non-uniform implosion and weak x-ray power.

V. COLD CORE VS. HOT CORE

Recent results from 1- μs /6-MA Sphinx [16] show increased X-ray radiation by controlling the initiation phase of an Al array explosion. A homogeneous condition of the wire cores was achieved in [16] using 8 specially designed prepulse generators which support ultra slow heating ($dI/dt \sim 0.002$ A/ns/wire, heating time ~ 4 μs) with resulting low-voltage (~ 100 V/cm) breakdown of hydrocarbon impurities before Al melting. After breakdown the Al wires were in a homogeneous solid state ($T \sim 600$ K), leading to axially symmetric ablation and enhanced X-ray yield. A liquid wire core ablates for a shorter time than a solid core owing to its larger expansion velocity. This means a liquid core (short-time ablation) is more appropriate for $\sim 100\text{-ns}$ current accelerators, while a solid

core (long-time ablation) can be an effective ablator for $\sim 1\text{-}\mu\text{s}$ accelerators. Moreover, increasing the initial liquid wire core temperature (increasing the expansion velocity and therefore the ablation rate), allows one to effectively regulate the ablation time to match it to the time of implosion for obtaining the highest peak X-ray power [17,18].

V. CONCLUSION

For the same prepulse current, one cannot increase indefinitely the wire number to achieve better azimuthal symmetry without degradation of the axial symmetry, due to decreasing of the current rate per wire [3,5,19]. Also, smaller-diameter wires, typically employed in larger-wire-number arrays, produce stronger radial electric fields that would require higher current rates per wire to minimize polarity-effect induced axial inhomogeneity. So, an appropriate current-rate-per-wire prepulse (for axial symmetry), combined with the largest possible wire number (for azimuthal symmetry) that allows the necessary current rate per wire, results in the creation of the most symmetrical plasma cylinder possible, critical for final magnetic compression and X-ray power. Symmetrical ablation must be maintained for any parameter-scan experiments in order to best observe expected scaling relationships [18]. Experiments designed to maximize x-ray power by varying load parameters as suggested by MHD simulations have failed to demonstrate the predicted behavior [19] probably because the symmetry conditions assumed in the simulations were violated when the optimum wire-initiation requirements were no longer met.

The symmetrical geometry of a wire-array does not automatically guarantee symmetrical ablation. To obtain symmetrical ablation the initiation phase of the wire array must be appropriately controlled.

VII. REFERENCES

1. D.D. Ryutov, M.S. Derzon, M.K. Matzen, Rev. Mod. Phys. **72**, 167 (2000).
2. T.W.L. Sanford, G.O. Allshouse, B.M. Marder, T.J. Nash, R.C. Mock, R.B. Spielman, J.F. Seamen, J.S. McGurn, D. Jobe, T.L. Gilliland, M. Vargas, K.W. Struve, W.A. Stygar, M.R. Douglas, M.K. Matzen, J.H. Hammer, J.S. De Groot, J.L. Eddleman, D.L. Peterson, D. Mosher, K.G. Whitney, J.W. Thornhill, P.E. Pulsifer, J.P. Apruzese, Y. Maron, Phys. Rev. Lett. **77**, 5063 (1996); T.W.L. Sanford, R.B. Spielman, G.A. Chandler, D.L. Fehl, W.A. Stygar, K.W. Struve, C. Deeney, T.J. Nash, J.F. Seamen, R. Mock, T.L. Gilliland, J.S. McGurn, D. Jobe, IEEE Trans. Plasma Sci. **26**, 1086 (1998).
3. C.A. Coverdale, C. Deeney, M.R. Douglas, J. P. Apruzese, K. G. Whitney, J.W. Thornhill, and J. Davis, Phys. Rev. Lett. **88**, 065001 (2002); M.G. Mazarakis, C.E. Deeney, M.R. Douglas, W.A. Stygar, D.B. Sinars, M.E. Cuneo, J. Chittenden, G.A. Chandler, T.J. Nash, K.W. Struve, D.H. McDaniel, Plasma Device and Operations **13**, 157 (2005).
4. G.S. Sarkisov, S.E. Rosenthal, K.W. Struve, V.V. Ivanov, T.E. Cowan, A. Astanovitskiy, A. Haboub, Phys. Plasma **14**, 052704 (2007).
5. G.S. Sarkisov, S.E. Rosenthal, K.W. Struve, T.E. Cowan, R. Presura, A.L. Astanovitskiy, A. Haboub, and A. Morozov, Phys. Plasma **14**, 112701 (2007).
6. G.S. Sarkisov, P.V. Sasorov, K.W. Struve, D.H. McDaniel, A.N. Gribov, G.M. Oleinik, Phys. Rev. E **66**, 046413 (2002).
7. S.N. Bland, S.V. Lebedev, J.P. Chittenden, D.J. Ampleford, S.C. Bott, J.A. Gomez, M.G. Haines, G.N. Hall, D.A. Hammer, I.H. Mitchell, J.B.A. Palmer, Phys. Rev. Lett. **95**, 135001 (2005).
8. E.V. Grabovski, A.N. Gribov, K.N. Mitrofanov, G.M. Olenik, I.Yu. Porofeev, I.N. Frolov, Plasma Phys. Rep. **33**, 923 (2007); G.M. Oleinik, V.V. Alexandrov, I.N. Frolov, E.V. Grabovsky, A.N. Gribov, K.N. Mitrofanov, I.Yu. Porofeev, A.A. Samokhin, V.P. Smirnov, P.V. Sasorov, G.S. Sarkisov, K.W. Struve, J. Phys. IV France **133**, 779 (2006).
9. G.S. Sarkisov, B.S. Bauer, J.S. De Groot, JETP Lett. **73**, 69 (2001); G.S. Sarkisov, K.W. Struve, D.H. McDaniel, Phys. Plasma **11**, 4573 (2004).
10. P.U. Duselis, J.A. Vaughan, B.R. Kusse, Phys. Plasma **11**, 4025 (2004).
11. A.G. Roussikh, R.A. Baksht, S.A. Chaikovsky, A.V. Fedunin, K.V. Krishchenko, A.Yu. Labetsky, P.R. Levashov, A.V. Shishlov, S.I. Tkachenko, IEEE Trans. Plasma Sci. **34**, 2232 (2006).

12. T.W.L. Sanford, C.A. Jennings, G.A. Rochau, S.E. Rosenthal, G.S. Sarkisov, P.V. Sasorov, W.A. Stygar, L.F. Bennett, D.E. Bliss, J.P. Chittenden, M.E. Cuneo, M.G. Haines, R.J. Leeper, R.C. Mock, T.J. Nash, D.L. Peterson, *Phys. Rev. Lett.* **98**, 065003 (2007).
13. G.S. Sarkisov, K.W. Struve, D.H. McDaniel, *Phys. Plasma* **12**, 052702 (2005).
14. G.S. Sarkisov, P.V. Sasorov, K.W. Struve, D.H. McDaniel, *J. Appl. Phys.* **93**, 1674 (2004).
15. E.P. Yu, B.V. Oliver, D.B. Sinars, T.A. Mehlhorn, M.E. Cuneo, P.V. Sasorov, M.G. Haines, S.V. Lebedev, *Phys. Plasmas* **14**, 022705 (2007); P.V. Sasorov, B.V. Oliver, E.P. Yu, T.A. Mehlhorn, *Phys. Plasmas* **15**, 022702 (2008).
16. H. Calamy, F. Lassalle, A. Luyen, F. Zucchini, J.P. Chittenden, F. Hamann, P. Maury, A. Georges, J.P. Bedoch, A. Morell, *Phys. Plasma* **15**, 012701 (2008).
17. V.V. Aleksandrov, A.V. Branitskii, G.S. Volkov, E.V. Grabovskii, M.V. Zurin, S.L. Nedoseev, G.M. Oleinik, A.A. Samokhin, P.V. Sasorov, V.P. Smirnov, M.V. Fedulov, I.N. Frolov, *Plasma Phys. Rep.* **27**, 89 (2001); P. Sasorov, *Dense Z-Pinches: 6th International Conference on Dense Z-Pinches* (Oxford, United Kingdom, 25-28 July 2005), Ed.: J. Chittenden, AIP Proc. v. 808, 2006, p. 81.
18. W.A. Stygar, M.E. Cuneo, R.A. Vesey, H.C. Ives, M.G. Mazarakis, G.A. Chandler, D.L. Fehl, R.J. Leeper, M.K. Matzen, D.H. McDaniel, J.S. McGurn, J.L. McKenney, D.J. Miron, C.L. Olson, J.L. Porter, J.J. Ramirez, J.F. Seamen, C.S. Speas, R.B. Spielman, K.W. Struve, J.A. Torres, E.M. Waisman, *Phys. Rev. E* **72**, 026404 (2005).
19. T.W.L. Sanford, *IEEE Trans. Plasma Sci.* **36**, 22 (2008).

VIII. APPENDIX

Monitoring and improvement of ablation symmetry of wire arrays on the ZR-accelerator

Simple diagnostics of ablation symmetry and tools for optimization of wire array initiation can be proposed for wire-array experiments on the upcoming ZR accelerator. Figure 1 presents a schematic of the typical cathode-anode plate with a wire array. Main B-dots allow measurement of the large 28-MA current, while a prepulse B-dot, mounted in the wall of the current return can, has greater sensitivity to measure the small prepulse current. A plastic insert on the high-voltage cathode would operate as a flashover switch with internal breakdown [4,5]. This switch can be used to change the prepulse current rate. The external surface has a longer flashing length than the internal. This should lead to surface breakdown across the internal surface rather than over the external. This important design feature avoids early plasma generation in the narrow ~ 5 mm MITL gap and thereby prevents a short circuit upstream of the wire array load.

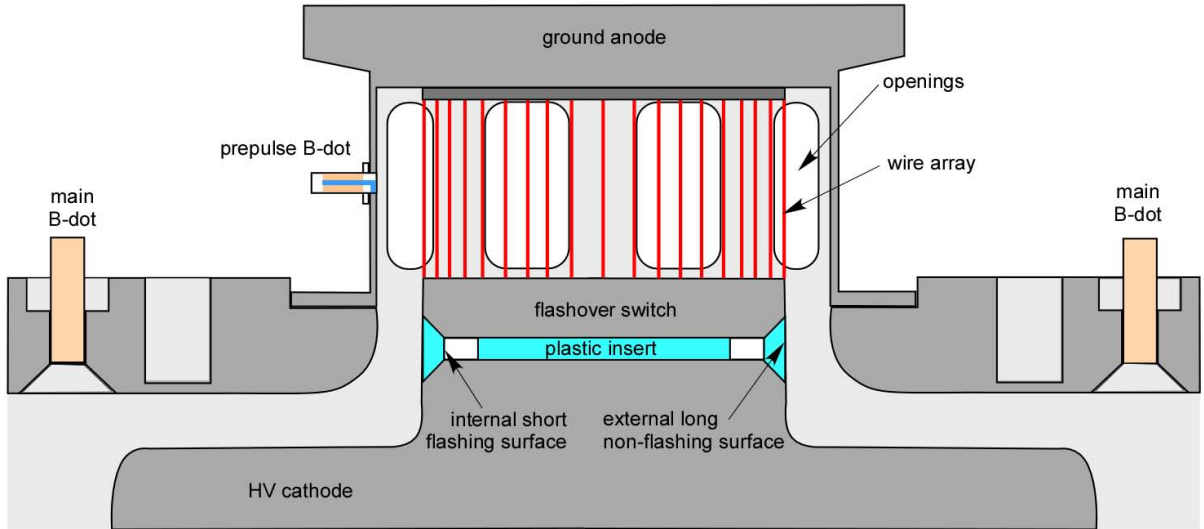


Figure 1. Experimental setup with flashover switch and prepulse B-dot for ZR.

Figure 2(a) shows the setup for a 6-directional observation of the axial symmetry of the wire-array-breakdown light and later ablation plasma-light emission. Because of the 4-5

order of magnitude difference between breakdown and plasma light emission, the registration of the light at the end of the optical fiber must be done using two fast photo-diodes with different attenuation filters. For a double array load, the number of channels

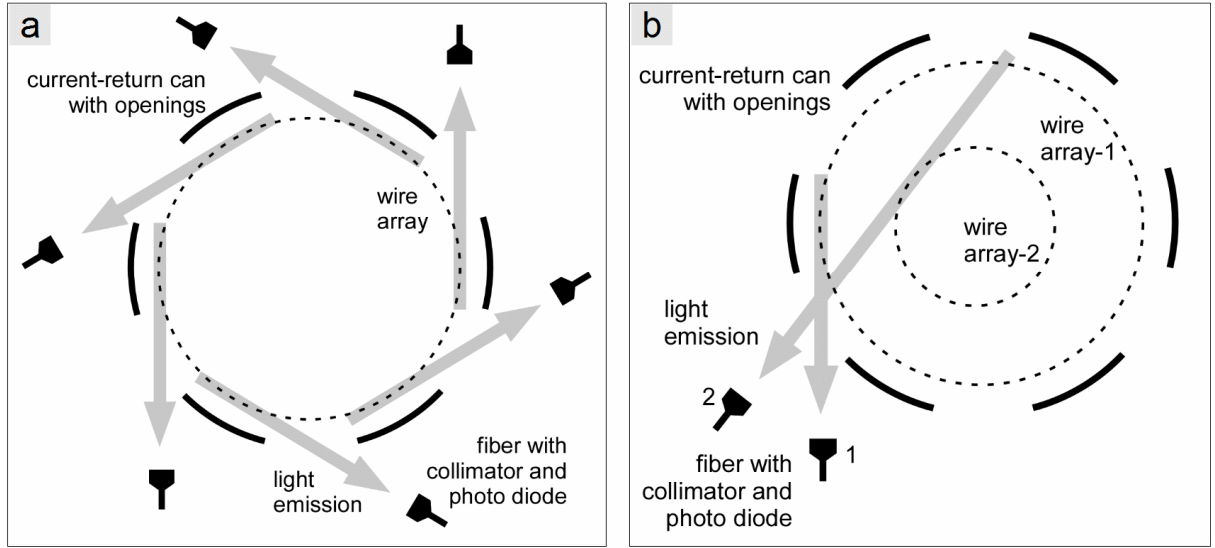


Figure 2. Experimental setup for monitoring of the light emission symmetry at ZR.

should be twice what is needed for a single array as shown in Fig. 2(b). This diagnostic setup allows estimating the axial homogeneity of initial energy deposition into a wire array before plasma generation as well as axial homogeneity of the array ablation. The state of the wire cores (solid, liquid, or gas-plasma) at the moment of breakdown can be estimated using the current prepulse waveform and the time and amplitude of the breakdown light emission spike.

DISTRIBUTION

External:

5	Dr. P.V. Sasorov Institute of Theoretical and Experimental Physics Moscow 117218, Russia	1	Ken Whitney NRL Radiation Hydrodynamics Branch, Code 6720 4555 Overlook Ave SW Washington, DC 20375
1	C. Deeney Director, Office of Defense Science NA-11/Forrestal Building U.S. Department of Energy 1000 Independence Ave., S.W. Washington, DC 20585	1	J.W. Thornhill NRL Radiation Hydrodynamics Branch, Code 6720 4555 Overlook Ave SW Washington, DC 20375
1	Gerry Cooperstein NRL Pulsed Power Physics Branch, Code 6770 4555 Overlook Ave SW Washington, DC 20375	1	Nino Pereira Ecopulse, Inc 7844 Vervain Ct Springfield, VA 22152-3106
1	J. P. Apruzese NRL Pulsed Power Physics Branch, Code 6770 4555 Overlook Ave SW Washington, DC 20375	1	Prof. M. Haines Blackett Lab, Plasma Physics Group, Prince Consort Rd, South Kennsington London, SW72BZ, UK
1	David Mosher NRL Pulsed Power Physics Branch, Code 6770 4555 Overlook Ave SW Washington, DC 20375	1	Prof. S. Lebedev Blackett Lab, Plasma Physics Group, Prince Consort Rd, South Kennsington London, SW72BZ, UK
1	Jack Davis NRL Radiation Hydrodynamics Branch, Code 6720 4555 Overlook Ave SW Washington, DC 20375	1	Prof. J. Chittenden Blackett Lab, Plasma Physics Group, Prince Consort Rd, South Kennsington London, SW72BZ, UK
		1	Dr. S. Bland Blackett Lab, Plasma Physics Group, Prince Consort Rd, South Kennsington London, SW72BZ, UK

- | | | | |
|---|---|---|---|
| 1 | Prof. D. Hammer
327 Rhodes Hall
Cornell University
Ithaca, NY 14853 | 1 | Prof. F. Beg
Center for Energy Research
University of California San
Diego
9500 Gilman Drive #0411
La Jolla, CA 92038-0411 |
| 1 | Bruce Kusse
441 Frank H. T. Rhodes Hall
Cornell University
Ithaca, NY 14853 | 1 | Simon Bott
Center for Energy Research
University of California, San
Diego
9500 Gilman Drive, #0417
La Jolla, CA 92093-0417 |
| 1 | Prof. J. Kindel
Nevada Terawatt Facility
5625 Fox Ave.
Reno, NV 89506 | | |
| 1 | Prof. V. Ivanov
Nevada Terawatt Facility
5625 Fox Ave.
Reno, NV 89506 | 1 | Dr. F. Lassalle,
Centre d'Etudes de Gramat,
46500 Gramat, France |
| 1 | Prof. V. Kantsyrev
Nevada Terawatt Facility
5625 Fox Ave.
Reno, NV 89506 | 1 | Dr. E. Grabovsky
Troitsk Institute for Innovation
and
Thermonuclear Investigation,
Troitsk 142190, Russia |
| 1 | Prof. R. Presura
Nevada Terawatt Facility
5625 Fox Ave.
Reno, NV 89506 | 1 | Dr. G. Oleinik
Troitsk Institute for Innovation
and
Thermonuclear Investigation,
Troitsk 142190, Russia |
| 1 | Alla Safronova
Physics Dept.
University of Nevada, Reno
1664 N. Virginia St.
MailStop 0220
Reno, NV 89557 | 1 | Dr. S. Pikuz
P.N. Lebedev Physical Institute,
Leninsky Prospekt 53,
Moscow 117924, Russia |
| 1 | Prof. R. Gilgenbach
Dept. of Nuclear Engineering
and Radiological Sciences,
University of Michigan,
1941 Cooley Bldg.
Ann Arbor, MI 48109-2104 | 1 | Acad. V. Smirnov
Russian Research Centre
Kurchatov Institute, Pl.
Kurchatova 1,
Moscow 123182, Russia |
| | | 1 | Prof. A. Kingsep
Russian Research Centre
Kurchatov Institute, Pl.
Kurchatova 1,
Moscow 123182, Russia |

- | | | | |
|---|--|---|--|
| 1 | Dr. Yu. Kalinin
Russian Research Centre
Kurchatov Institute, Pl.
Kurchatova 1,
Moscow 123182, Russia | 1 | L.I. Rudakov
Icarus Research
P.O. Box 30780
Bethesda, MD 20824-0780 |
| 1 | Dr. I. Glazyrin
RFNC-VNIITF, PO Box 245,
Snezhinsk 456770, Russia | 1 | J.W. Thornhill
Naval Research Laboratory
Plasma Physics Division
Radiation Hydrodynamics
Branch
Code 6720
Washington, DC 20375 |
| 1 | Dr. A. Shishlov
High Current Electronics
Institute,
Academicheskii pr. 2/3
Tomsk 634055, Russia | 5 | Dr. Gennady S. Sarkisov
Ktech Corporation
10800 Gibson Blvd. SE
Albuquerque, NM 87123 |
| 1 | Dr. V. Oreshkin
High Current Electronics
Institute,
Academicheskii pr. 2/3
Tomsk 634055, Russia | 1 | Dr. Rick B. Spielman
Ktech Corporation
10800 Gibson Blvd. SE
Albuquerque, NM 87123 |
| 1 | Dr. Darrell Peterson
Los Alamos National Laboratory
P.O. Box 1663
Los Alamos, NM 87545 | 1 | Steven E. Downie
Ktech Corporation
10800 Gibson Blvd. SE
Albuquerque, NM 87123 |
| 1 | Tom Tierney
LANL
P.O. Box 1663
Los Alamos 87545 | 1 | Mark Harris
Ktech Corporation
10800 Gibson Blvd. SE
Albuquerque, NM 87123 |
| 1 | A.S. Chuvatin
Laboratoire de Physique et
Technologie des Plasmas
Ecole Polytechnique
91128 Palaiseau
France | | |

Internal:

1 MS 1190 M.K. Matzen, 1600	1 MS 1191 G.T. Leifeste, 1675
1 MS 1191 J.L. Porter, 1670	1 MS 1193 L.A. McPherson, Jr., 1675
1 MS 1181 T.A. Mehlhorn, 1640	1 MS 1193 M.R. Lopez, 1675
1 MS 1181 L.X. Schneider, 1650	1 MS 1193 M. Jones, 1675
1 MS 1178 D.D. Bloomquist, 1630	1 MS 1196 R.J. Leeper, 1677
1 MS 1168 D.H. McDaniel, 1650	1 MS 1196 J.E. Bailey, 1677
1 MS 1186 M.P. Desjarlais, 1640	1 MS 1196 G.A. Chandler, 1677
1 MS 0125 J.P. VanDevender, 12101	1 MS 1196 T.J. Nash, 1677
1 MS 1179 M.A. Hedemann, 1340	1 MS 1196 R.E. Olson, 1677
1 MS 1186 T.A. Brunner, 1641	1 MS 1196 G.A. Rochau, 1677
1 MS 1186 R.B. Campbell, 1641	1 MS 1196 C.L. Ruiz, 1677
1 MS 1186 K.R. Cochran, 1641	20 MS 1196 Tom Sanford, 1677
1 MS 1186 C.J. Garasi, 1641	
1 MS 1186 T.A. Haill, 1641	1 MS 0899 Technical Library, 9536
1 MS 1186 H.L. Hanshaw, 1641	(electronic copy)
1 MS 1186 C. Jennings, 1641	
1 MS 1186 R.W. Lemke, 1641	
1 MS 1186 T.K. Mattsson, 1641	
1 MS 1186 E.P. Yu, 1641	
1 MS 1159 C.A. Coverdale, 1344	
1 MS 1193 B.V. Oliver, 1645	
1 MS 1168 C.A. Hall, 1646	
1 MS 1152 M.L. Kiefer, 1652	
1 MS 1152 T.D. Pointon, 1652	
1 MS 1194 K.W. Struve, 1670	
1 MS 1191 M.A. Sweeney, 1670	
1 MS 1196 W.A. Stygar, 1671	
1 MS 1194 M.G. Mazarakis, 1671	
1 MS 1194 M.E. Savage, 1671	
1 MS 1194 J.R. Woodworth, 1671	
1 MS 1194 W.E. Fowler, 1671	
1 MS 1193 B.W. Atherton, 1672	
1 MS 1193 D.E. Bliss, 1672	
1 MS 1193 M.E. Cuneo, 1673	
1 MS 1193 B. Jones, 1673	
1 MS 1106 D.J. Ampleford, 1673	
1 MS 1194 E.M. Waisman, 1673	
1 MS 1193 D.L. Hanson, 1673	
1 MS 1193 D.B. Sinars, 1673	
1 MS 1186 M. Herrmann, 1674	
1 MS 1186 P.J. Christenson, 1674	
1 MS 1186 R.A. Vesey, 1674	
1 MS 1186 K. Peterson, 1674	
1 MS 1186 A.B. Sefkow, 1674	
5 MS 1186 S.E. Rosenthal, 1674	
1 MS 1186 S.A. Slutz, 1674	

