

## ENGINEERING CHANGE NOTICE

Page 1 of 2

1. ECN 661460

Proj.  
ECN

2. ECN Category (mark one)		3. Originator's Name, Organization, MSIN, and Telephone No. J.W. Niskas, Process Engineering, R3-86, 372-2252		4. USQ Required? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	5. Date 7/20/00
Supplemental <input type="checkbox"/>	[X]	6. Project Title/No./Work Order No. Spent Nuclear Fuel Project		7. Bldg./Sys./Fac. No. 105-KW	8. Approval Designator E, S <sup>N</sup> , Q
Direct Revision <input type="checkbox"/>		9. Document Numbers Changed by this ECN (includes sheet no. and rev.) SNF-5952, Rev. 0		10. Related ECN No(s). N/A	11. Related PO No. N/A
Change ECN <input type="checkbox"/>					
Temporary <input type="checkbox"/>					
Standby <input type="checkbox"/>					
Supersede <input type="checkbox"/>					
Cancel/Void <input type="checkbox"/>					
12a. Modification Work  <input type="checkbox"/> Yes (fill out Blk. 12b) <input checked="" type="checkbox"/> No (NA Blks. 12b, 12c, 12d)		12b. Work Package No.  N/A	12c. Modification Work Complete  N/A  Design Authority/Cog. Engineer Signature & Date	12d. Restored to Original Condition (Temp. or Standby ECN only)  N/A  Design Authority/Cog. Engineer Signature & Date	
13a. Description of Change 1. Complete document revision. 2. Added section to provide MCO Fuel Basket loading option for acceptable fuel. 3. Increased scope of test procedure to include Phases 3 and 4. 4. Deleted references to specific Step Numbers and Document Revision Numbers to make procedure more practicable. 5. Clarified test communication between Engineering and Operations. 6. Added IWTS sampling activities.					
13b. Design Baseline Document? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No					
This document was reviewed in accordance with the document review requirements of AP EN 6-009.					
USQ Screening Number: J.N. 8-3-00 K-00-1001					
14a. Justification (mark one)		14b. Justification Details			
Criteria Change <input checked="" type="checkbox"/>		Revision updates test procedure to incorporate test scope modifications and comments received on the initial released version.			
Design Improvement <input type="checkbox"/>					
Environmental <input type="checkbox"/>					
Facility Deactivation <input type="checkbox"/>					
As-Found <input type="checkbox"/>					
Facilitate Const <input type="checkbox"/>					
Const. Error/Omission <input type="checkbox"/>					
Design Error/Omission <input type="checkbox"/>					
15. Distribution (include name, MSIN, and no. of copies) See distribution				RELEASE STAMP	

ENGINEERING CHANGE NOTICE				Page 2 of 2	1. ECN (use no. from pg. 1) 661460																																																																												
16. Design Verification Required [ ] Yes [X] No	17. Cost Impact <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p style="text-align: center;">ENGINEERING</p> <p>Additional [N/A] \$</p> <p>Savings [N/A] \$</p> </div> <div style="width: 45%;"> <p style="text-align: center;">CONSTRUCTION</p> <p>Additional [N/A] \$</p> <p>Savings [N/A] \$</p> </div> </div>			18. Schedule Impact (days)  Improve ment [N/A] Delay [N/A]																																																																													
19. Change Impact Review: Indicate the related documents (other than the engineering documents identified on Side 1) that will be affected by the change described in Block 13. Enter the affected document number in Block 20.																																																																																	
<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%; vertical-align: top;">           SDD/DD [ ]            Functional Design Criteria [ ]            Operating Specification [ ]            Criticality Specification [ ]            Conceptual Design Report [ ]            Equipment Spec. [ ]            Const. Spec. [ ]            Procurement Spec. [ ]            Vendor Information [ ]            OM Manual [ ]            PSAR/SAR [ ]            Safety Equipment List [ ]            Radiation Work Permit [ ]            Environmental Impact Statement [ ]            Environmental Report [ ]            Environmental Permit [ ]         </td> <td style="width: 33%; vertical-align: top;">           Seismic/Stress Analysis [ ]            Stress/Design Report [ ]            Interface Control Drawing [ ]            Calibration Procedure [ ]            Installation Procedure [ ]            Maintenance Procedure [ ]            Engineering Procedure [ ]            Operating Instruction [ ]            Operating Procedure [ ]            Operational Safety Requirement [ ]            IEFD Drawing [ ]            Cell Arrangement Drawing [ ]            Essential Material Specification [ ]            Fac. Proc. Samp. Schedule [ ]            Inspection Plan [ ]            Inventory Adjustment Request [ ]         </td> <td style="width: 33%; vertical-align: top;">           Tank Calibration Manual [ ]            Health Physics Procedure [ ]            Spares Multiple Unit Listing [ ]            Test Procedures/Specification [X]            Component Index [ ]            ASME Coded Item [ ]            Human Factor Consideration [ ]            Computer Software [ ]            Electric Circuit Schedule [ ]            ICRS Procedure [ ]            Process Control Manual/Plan [ ]            Process Flow Chart [ ]            Purchase Requisition [ ]            Tickler File [ ]         </td> </tr> </table>						SDD/DD [ ] Functional Design Criteria [ ] Operating Specification [ ] Criticality Specification [ ] Conceptual Design Report [ ] Equipment Spec. [ ] Const. Spec. [ ] Procurement Spec. [ ] Vendor Information [ ] OM Manual [ ] PSAR/SAR [ ] Safety Equipment List [ ] Radiation Work Permit [ ] Environmental Impact Statement [ ] Environmental Report [ ] Environmental Permit [ ]	Seismic/Stress Analysis [ ] Stress/Design Report [ ] Interface Control Drawing [ ] Calibration Procedure [ ] Installation Procedure [ ] Maintenance Procedure [ ] Engineering Procedure [ ] Operating Instruction [ ] Operating Procedure [ ] Operational Safety Requirement [ ] IEFD Drawing [ ] Cell Arrangement Drawing [ ] Essential Material Specification [ ] Fac. Proc. Samp. Schedule [ ] Inspection Plan [ ] Inventory Adjustment Request [ ]	Tank Calibration Manual [ ] Health Physics Procedure [ ] Spares Multiple Unit Listing [ ] Test Procedures/Specification [X] Component Index [ ] ASME Coded Item [ ] Human Factor Consideration [ ] Computer Software [ ] Electric Circuit Schedule [ ] ICRS Procedure [ ] Process Control Manual/Plan [ ] Process Flow Chart [ ] Purchase Requisition [ ] Tickler File [ ]																																																																									
SDD/DD [ ] Functional Design Criteria [ ] Operating Specification [ ] Criticality Specification [ ] Conceptual Design Report [ ] Equipment Spec. [ ] Const. Spec. [ ] Procurement Spec. [ ] Vendor Information [ ] OM Manual [ ] PSAR/SAR [ ] Safety Equipment List [ ] Radiation Work Permit [ ] Environmental Impact Statement [ ] Environmental Report [ ] Environmental Permit [ ]	Seismic/Stress Analysis [ ] Stress/Design Report [ ] Interface Control Drawing [ ] Calibration Procedure [ ] Installation Procedure [ ] Maintenance Procedure [ ] Engineering Procedure [ ] Operating Instruction [ ] Operating Procedure [ ] Operational Safety Requirement [ ] IEFD Drawing [ ] Cell Arrangement Drawing [ ] Essential Material Specification [ ] Fac. Proc. Samp. Schedule [ ] Inspection Plan [ ] Inventory Adjustment Request [ ]	Tank Calibration Manual [ ] Health Physics Procedure [ ] Spares Multiple Unit Listing [ ] Test Procedures/Specification [X] Component Index [ ] ASME Coded Item [ ] Human Factor Consideration [ ] Computer Software [ ] Electric Circuit Schedule [ ] ICRS Procedure [ ] Process Control Manual/Plan [ ] Process Flow Chart [ ] Purchase Requisition [ ] Tickler File [ ]																																																																															
20. Other Affected Documents: (NOTE: Documents listed below will not be revised by this ECN.) Signatures below indicate that the signing organization has been notified of other affected documents listed below.																																																																																	
<table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 33%; text-align: center;">Document Number/Revision</th> <th style="width: 33%; text-align: center;">Document Number/Revision</th> <th style="width: 33%; text-align: center;">Document Number Revision</th> </tr> <tr> <td>FTP-OP-PSI-054W, Rev. 0</td> <td></td> <td></td> </tr> <tr> <td>FTP-OP-PSI-055W, Rev. 0</td> <td></td> <td></td> </tr> <tr> <td>FTP-OP-PSI-059W, Rev. 0</td> <td></td> <td></td> </tr> </table>						Document Number/Revision	Document Number/Revision	Document Number Revision	FTP-OP-PSI-054W, Rev. 0			FTP-OP-PSI-055W, Rev. 0			FTP-OP-PSI-059W, Rev. 0																																																																		
Document Number/Revision	Document Number/Revision	Document Number Revision																																																																															
FTP-OP-PSI-054W, Rev. 0																																																																																	
FTP-OP-PSI-055W, Rev. 0																																																																																	
FTP-OP-PSI-059W, Rev. 0																																																																																	
21. Approvals																																																																																	
<table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 45%; text-align: center;">Signature</th> <th style="width: 10%; text-align: center;">Date</th> <th style="width: 45%; text-align: center;">Signature</th> <th style="width: 10%; text-align: center;">Date</th> </tr> <tr> <td colspan="4">Design Authority</td> </tr> <tr> <td>Cog. Eng. A. L. Pajunen <i>[Signature]</i></td> <td style="text-align: center;">7/25/2000</td> <td>Design Agent</td> <td></td> </tr> <tr> <td>Cog. Mgr. J. R. Frederickson <i>[Signature]</i></td> <td style="text-align: center;">7/24/00</td> <td>PE</td> <td></td> </tr> <tr> <td>QA P. E. Davis <i>[Signature]</i></td> <td style="text-align: center;">8/3/00</td> <td>QA</td> <td></td> </tr> <tr> <td>Safety C. T. Miller <i>[Signature]</i></td> <td style="text-align: center;">8/3/00</td> <td>Safety</td> <td></td> </tr> <tr> <td>Environ. D. J. Watson <i>[Signature]</i></td> <td style="text-align: center;">8/3/00</td> <td>Design</td> <td></td> </tr> <tr> <td>Other J. A. Dent <i>[Signature]</i></td> <td style="text-align: center;">8/3/00</td> <td>Environ.</td> <td></td> </tr> <tr> <td>V. L. Hoefer <i>[Signature]</i></td> <td style="text-align: center;">8/3/00</td> <td>Other</td> <td></td> </tr> <tr> <td>J. J. Klos <i>[Signature]</i></td> <td style="text-align: center;">7-25-00</td> <td></td> <td></td> </tr> <tr> <td>J. M. Kurta <i>[Signature]</i></td> <td style="text-align: center;">8/3/00</td> <td></td> <td></td> </tr> <tr> <td>J. E. Kurtz <i>[Signature]</i></td> <td style="text-align: center;">7/26/00</td> <td></td> <td></td> </tr> <tr> <td colspan="4" style="text-align: center;">DEPARTMENT OF ENERGY</td> </tr> <tr> <td>M. J. Langevin <i>[Signature]</i></td> <td style="text-align: center;">7/19/00</td> <td colspan="2" style="text-align: center;">Signature or a Control Number that tracks the Approval Signature</td> </tr> <tr> <td>J. D. Mathews <i>[Signature]</i></td> <td style="text-align: center;">8/3/00</td> <td colspan="2"></td> </tr> <tr> <td>J. W. Neska <i>[Signature]</i></td> <td style="text-align: center;">7-19-00</td> <td colspan="2" style="text-align: center;">ADDITIONAL</td> </tr> <tr> <td>A. L. Pitner <i>[Signature]</i></td> <td style="text-align: center;">7/19/00</td> <td colspan="2"></td> </tr> <tr> <td>S. C. Schlegel <i>[Signature]</i></td> <td style="text-align: center;">8/3/00</td> <td colspan="2"></td> </tr> <tr> <td>J. L. Shelor <i>[Signature]</i></td> <td style="text-align: center;">8/3/00</td> <td colspan="2"></td> </tr> </table>						Signature	Date	Signature	Date	Design Authority				Cog. Eng. A. L. Pajunen <i>[Signature]</i>	7/25/2000	Design Agent		Cog. Mgr. J. R. Frederickson <i>[Signature]</i>	7/24/00	PE		QA P. E. Davis <i>[Signature]</i>	8/3/00	QA		Safety C. T. Miller <i>[Signature]</i>	8/3/00	Safety		Environ. D. J. Watson <i>[Signature]</i>	8/3/00	Design		Other J. A. Dent <i>[Signature]</i>	8/3/00	Environ.		V. L. Hoefer <i>[Signature]</i>	8/3/00	Other		J. J. Klos <i>[Signature]</i>	7-25-00			J. M. Kurta <i>[Signature]</i>	8/3/00			J. E. Kurtz <i>[Signature]</i>	7/26/00			DEPARTMENT OF ENERGY				M. J. Langevin <i>[Signature]</i>	7/19/00	Signature or a Control Number that tracks the Approval Signature		J. D. Mathews <i>[Signature]</i>	8/3/00			J. W. Neska <i>[Signature]</i>	7-19-00	ADDITIONAL		A. L. Pitner <i>[Signature]</i>	7/19/00			S. C. Schlegel <i>[Signature]</i>	8/3/00			J. L. Shelor <i>[Signature]</i>	8/3/00		
Signature	Date	Signature	Date																																																																														
Design Authority																																																																																	
Cog. Eng. A. L. Pajunen <i>[Signature]</i>	7/25/2000	Design Agent																																																																															
Cog. Mgr. J. R. Frederickson <i>[Signature]</i>	7/24/00	PE																																																																															
QA P. E. Davis <i>[Signature]</i>	8/3/00	QA																																																																															
Safety C. T. Miller <i>[Signature]</i>	8/3/00	Safety																																																																															
Environ. D. J. Watson <i>[Signature]</i>	8/3/00	Design																																																																															
Other J. A. Dent <i>[Signature]</i>	8/3/00	Environ.																																																																															
V. L. Hoefer <i>[Signature]</i>	8/3/00	Other																																																																															
J. J. Klos <i>[Signature]</i>	7-25-00																																																																																
J. M. Kurta <i>[Signature]</i>	8/3/00																																																																																
J. E. Kurtz <i>[Signature]</i>	7/26/00																																																																																
DEPARTMENT OF ENERGY																																																																																	
M. J. Langevin <i>[Signature]</i>	7/19/00	Signature or a Control Number that tracks the Approval Signature																																																																															
J. D. Mathews <i>[Signature]</i>	8/3/00																																																																																
J. W. Neska <i>[Signature]</i>	7-19-00	ADDITIONAL																																																																															
A. L. Pitner <i>[Signature]</i>	7/19/00																																																																																
S. C. Schlegel <i>[Signature]</i>	8/3/00																																																																																
J. L. Shelor <i>[Signature]</i>	8/3/00																																																																																

# **Phased Startup Initiative Phase 3/4 Test Procedure (OCRWM)**

Prepared for the U.S. Department of Energy  
Assistant Secretary for Environmental Management

Project Hanford Management Contractor for the  
U.S. Department of Energy under Contract DE-AC06-96RL13200

**Fluor Hanford**  
P.O. Box 1000  
Richland, Washington

SNF-5952  
Revision 1

ECN 661460

# Phased Startup Initiative Phase 3/4 Test Procedure (OCRWM)

A. L. Pajunen  
Fluor Hanford

J. W. Niskas  
WASTREN


Date Published  
August 2000

Prepared for the U.S. Department of Energy  
Assistant Secretary for Environmental Management

Project Hanford Management Contractor for the  
U.S. Department of Energy under Contract DE-AC06-96RL13200

**Fluor Hanford**  
P.O. Box 1000  
Richland, Washington

  
Release Approval Date

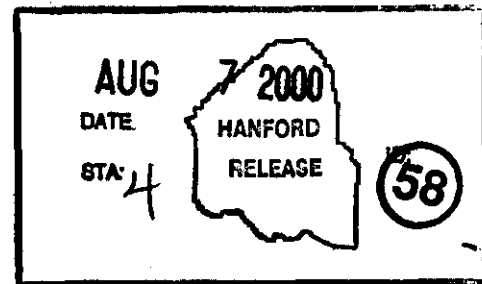

Release Stamp

**TRADEMARK DISCLAIMER**

Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors.

This report has been reproduced from the best available copy. Available in paper copy and microfiche.

Available electronically at <http://www.doe.gov/bridge>. Available for a processing fee to the U.S. Department of Energy and its contractors, in paper, from:

U.S. Department of Energy  
Office of Scientific and Technical Information  
P.O. Box 62  
Oak Ridge, TN 37831-0062  
phone: 865-576-8401  
fax: 865-576-5728  
email: [reports@adonis.osti.gov](mailto:reports@adonis.osti.gov)(423) 576-8401

Available for sale to the public, in paper, from:

U.S. Department of Commerce  
National Technical Information Service  
5285 Port Royal Road  
Springfield, VA 22161  
phone: 800-553-6847  
fax: 703-605-6900  
email: [orders@ntis.fedworld.gov](mailto:orders@ntis.fedworld.gov)  
online ordering: <http://www.ntis.gov/ordering.htm>

Printed in the United States of America

Total Pages: 47



# **Phased Startup Initiative**

## **Phase 3/4 Test Procedure (OCRWM)**

**SNF-5952**  
**Revision No. 1**

## **Executive Summary**

The purpose of this test procedure is to provide step-by-step instructions that guide test personnel through the initial testing of the Fuel Retrieval System and Integrated Water Treatment System with N Reactor fuel. This document supports the requirement for preparation of test procedures indicated in the Test Plan Content Guideline of EN-6-031-00, "Testing Process."

The scope of this test procedure for Phase 3 is to separately process six fuel canisters, plus contingency canisters. This test procedure will also be used for Phase 4 to separately process 29 canisters, plus contingency canisters. This test procedure provides directions for the testing activities described in HNF-4898, Rev. 1, "Phased Startup Initiative Phases 3 and 4 Test Plan and Test Specifications (OCRWM)."

This test procedure is intended to be primarily used by the Test Engineers, Engineering Test Director (ETD), and Operations Test Director (OTD) to ensure that data is recorded at specific steps during the operational use of Functional Test Procedures and Operating Procedures. The completed data sheets provide documentation of the test progress for each canister to satisfy test control and traceability requirements in HNF-PRO-286, "Test Control," and EN-6-031, "Testing Process."

At least three engineers are required for the fuel cleanliness inspection team. One of these engineers is the ETD. The ETD makes testing decisions and provides test direction. The OTD directs operations activities. Communication about test direction for engineering and operations is between the ETD and the OTD.



## **Table of Contents**

<b>1.0 INTRODUCTION .....</b>	<b>6</b>
<b>2.0 SCOPE .....</b>	<b>6</b>
<b>3.0 GENERAL REQUIREMENTS.....</b>	<b>7</b>
<b>4.0 TOOLS, EQUIPMENT, AND SUPPLIES.....</b>	<b>9</b>
<b>5.0 SAFETY, PRECAUTIONS, AND LIMITATIONS .....</b>	<b>11</b>
5.1 General Safety .....	11
5.2 Personnel.....	11
5.3 Equipment.....	11
5.4 Environment.....	11
<b>6.0 PERSONNEL REQUIREMENTS.....</b>	<b>12</b>
<b>7.0 REQUIRED DOCUMENTS AND REFERENCES.....</b>	<b>13</b>
7.1 Primary References .....	13
7.2 Other References.....	13
7.3 Drawings.....	14
<b>8.0 PREREQUISITE ACTIONS.....</b>	<b>15</b>
<b>9.0 PROCEDURE STEPS .....</b>	<b>20</b>
9.1 Record Pretest Conditions .....	20
9.2 Retrieve Fuel Canister .....	21
9.3 Decap Fuel Canister .....	21
9.4 Obtain Post-Decapping Data .....	21
9.5 Wash Fuel in PCM .....	22
9.6 Record Post-Washed Data .....	22
9.7 Dump Fuel on Process Table.....	22
9.8 Separate and Inspect Fuel.....	23
9.9 Sort and Load Debris .....	24
9.10 Sort and Load Fuel in Basket.....	24
9.11 Load Fuel in Canister.....	25
9.12 Load Scrap Fuel.....	25

---

**SPENT NUCLEAR FUEL PROJECT****Procedure Number: SNF-5952****Phased Startup Initiative****Revision: 1****Phase 3/4 Test Procedure****Effective Date: 8/7/00****(OCRWM)****Page 3 of 42**

---

9.13	Sort and Load Coarse Scrap.....	25
9.14	Load Fine Scrap.....	26
9.15	Load Scrap from PCM Wash and Strainer Baskets .....	27
9.16	Process Scrap Canister .....	28
10.0	<b>DATA SHEETS.....</b>	<b>29</b>
	<b>ATTACHMENT A PHASE 3/4 FRS/IWTS DATA SHEET PAGE 1 OF 7.....</b>	<b>30</b>
	<b>ATTACHMENT B PHASE 3/4 FRS CLEANING PROCESS DATA SHEET (OCRWM)</b>	
	<b>PAGE 1 OF 2.....</b>	<b>37</b>
	<b>ATTACHMENT C TEST EQUIPMENT CALIBRATION LOG.....</b>	<b>39</b>
	<b>ATTACHMENT D INSTALLED EQUIPMENT CALIBRATION LOG.....</b>	<b>40</b>
	<b>ATTACHMENT E END-OF SHIFT TEST STATUS REPORT, PSI PHASE 3/4 .....</b>	<b>41</b>
	<b>ATTACHMENT F PRE-JOB SAFETY BRIEFING SIGNATURE SHEET.....</b>	<b>42</b>

---

---

**SPENT NUCLEAR FUEL PROJECT****Phased Startup Initiative****Phase 3/4 Test Procedure****(OCRWM)****Procedure Number: SNF-5952****Revision: 1****Effective Date: 8/7/00****Page 4 of 42**

---

**List of Acronyms**

AJHA	Automated Job Hazard Analysis
CAM	Continuous Air Monitor
CCTV	Closed Circuit Television
DI	Deionized
DP	Data Point
ECN	Engineering Change Notice
EOC	Equipment Operations Center
ETD	Engineering Test Director
FRS	Fuel Retrieval System
FTP	Functional Test Procedure
HEPA	High-Efficiency Particulate Air
HPP	High-Pressure Pump
HPU	Hydraulic Power Unit
KOP	Knockout Pot
IWTS	Integrated Water Treatment System
IXM	Ion Exchange Module
M&TE	Measuring and Test Equipment
MCO	Multi-Canister Overpack
PCM	Primary Cleaning Machine
PSI	Phased Startup Initiative
OCRWM	Office of Civilian Radioactive Waste Management
OTD	Operations Test Director
QA	Quality Assurance
QAE/I	Quality Assurance Engineer/Inspector
QC	Quality Control
RBA	Radiological Buffer Area
RMA	Radioactive Material Area
SNF	Spent Nuclear Fuel

---

**SPENT NUCLEAR FUEL PROJECT****Procedure Number: SNF-5952****Phased Startup Initiative****Revision: 1****Phase 3/4 Test Procedure****Effective Date: 8/7/00****(OCRWM)****Page 5 of 42**

---

TE            Test Engineer

TSB           Telescoping Stiffback

## **1.0 INTRODUCTION**

The purpose of this test procedure is to safely operate the Fuel Retrieval System (FRS) and Integrated Water Treatment System (IWTS) with specific fuel canisters, and show that canisters containing fuel can be retrieved from the canister queue, decapped in the Canister Decapper, and loaded into the Primary Clean Machine (PCM) for fuel cleaning; and that fuel can be sorted on the Process Table, then loaded back into fuel canisters and relocated in basin storage. An option is included to load selected elements into multi-canister overpack (MCO) Fuel Baskets.

Additional Data are collected during this test, beyond that collected during production operations. These data support qualifying the cleaning performance of the PCM, assessing the quantity of scrap generated during the cleaning, and evaluating the impact of fuel retrieval operations on the Basin water quality. The additional data collected primarily consist of weighing fuel and scrap at selected points in the operation, as well as photographing fuel and scrap as it is processed. The time to perform operations is also monitored for comparison with design predictions. Water quality data are collected to establish a baseline to predict the effectiveness of equipment design for control of contamination and visibility during production operation.

## **2.0 SCOPE**

The scope of this test procedure is to validate the operation of FRS and IWTS components as a complete system. The Phase 3 test method is to individually process six specific fuel canisters through the FRS. The Phase 4 test method is to individually process 29 specific fuel canisters through the FRS. One fuel canister shall be completely processed in accordance with this test procedure before another canister is started in the process. The Phase 3 test sequence is to process six canisters. Contingency canisters have been identified, and will be processed if cleaning parameter variation is required. The Phase 4 test sequence is to process 29 canisters. Contingency canisters have been identified and will be processed to complete process validation, if necessary. The fuel canisters to be processed shall be listed in the Fuel Campaign Letter and are identified in HNF-4898, "Phased Startup Initiative Phases 3 and 4 Test Plan and Test Specifications (OCRWM)". (The acronym OCRWM is required to appear in titles of documents that collect data needed by the Office of Civilian Radioactive Waste Management.)

**3.0 GENERAL REQUIREMENTS**

- 3.1 This procedure is under the direct control of the Operations Test Director (OTD).
- 3.2 Direction for this procedure for the Test Engineers (TEs) will be provided by the Engineering Test Director (ETD), or designee.
- 3.3 The ETD will coordinate the test, review test results, and determine corrective actions. Test Engineers (TEs) will support the ETD in the recording and evaluation of data.
- 3.4 A pretest briefing for all personnel involved in the performance of the test shall be conducted at the beginning of each shift. When new test team members assume test duties, they can be briefed individually. The time and date of each briefing shall be documented in the test log.
- 3.5 Operations procedures, as applicable, including all safety procedures, shall apply to this test activity. The Pre-Job Safety Briefing Signature Sheet shall attest to having read the required safety procedures, such as the current Automated Job Hazard Analysis (AJHA), criticality postings, and the as low as reasonably achievable (ALARA) Management Worksheet.
- 3.6 Fuel Inspection and Process Engineers involved with testing activities shall have a Phased Startup Initiative (PSI) Qualification (Qual Card) and completed Office of Civilian Radioactive Waste Management (OCRWM) training.
- 3.7 Stuck fuel will not be processed during conduct of this Procedure. If a canister is found to contain stuck fuel, it shall be noted on the data sheet and returned to basin storage.
- 3.8 Fuel shall be inspected by the Fuel Inspection Team per HNF-5271, "Planning Document for Spent Nuclear Fuel Cleanliness Inspection Process (OCRWM)".
- 3.9 Selected fuel elements may be loaded into MCO Fuel Baskets, or back into canisters, at the direction of the Engineering and Operations Test Directors.
- 3.10 Scrap fuel shall be loaded back into canisters. No scrap fuel shall be loaded into MCO Scrap Baskets. The MCO Baskets shall be in place in the Process Table to prevent dropped fuel from falling into the MCO Basket Sockets.
- 3.11 The Fuel Status Inventory that remains on the Process Table at the end of each shift shall be provided to K Area Security.

- 3.12 Elapsed time shall be measured for certain process operations by recording the "Start" and "End" clock time. Any process down time that interrupts the normal work procedure of a process being evaluated shall be recorded in the Comments section on Phase 3/4 FRS/IWTS Data Sheet. Examples of process down time are recording Photographs and Weights, Continuous Air Monitor (CAM) alarms, equipment malfunction, or suspended operations.
- 3.13 For each canister, the Test Process shall be documented and tracked by the Phase 3/4 FRS/IWTS Data Sheet (Attachment A), and the End of Shift Test Status Report (Attachment E).
- 3.14 Data Sheets will be specific to a particular canister and assimilated into a canister specific Data package.
- 3.15 Checklists, Data Sheets, Photographs, and other test data collected as the tests are performed will be stamped in red ink as the "Test Control Copy." The test control copy of data will be maintained by the ETD/TE in the Test Data binder, located at the fuel inspection team desk in the basin Equipment Operations Center (EOC). At the end of each work day, the ETD/TE will make a copy of new data accumulated over the work day, stamp these data in red ink as "Duplicate of Original, Do Not Revise," and insert the data in the Back-Up Test Data binder located in the ETD's office in MO-285.
- 3.16 Water samples shall be analyzed to calculate waste loading on ion exchange modules (IXMs) IXM-1, IXM-2, and IXM-3. Composite water samples will be taken from the IXM common inlet and the IXM outlets while the IWTS is in service. The sample number, sample bottle change-out time, and composite sampler setting will be recorded in the 105-KW Process Monitoring Sample Label Book. This sample data and the sample analysis results shall be recorded in the Test Data binder.
- 3.17 The start time and end time for the IWTS in service and the garnet filter backwash and top sparge shall be recorded in the comments section of the Phase 3/4 FRS/IWTS Data Sheet.
- 3.18 Upon completion of Phase 4 testing, the PCM wash basket shall be removed from the PCM to inspect the PCM internals and obtain a video recording and hard copy printout of close-ups of the bearing surfaces and bearing wear indicator marks to support the evaluation started in SNF-A.7-PAT-010A, Rev. 1, Step 9.17.2.

#### **4.0 TOOLS, EQUIPMENT, AND SUPPLIES**

- 4.1 Weigh Station (shortened fuel canister hook with scale)
- 4.2 One VCR clock in the EOC shall be selected by the ETD and used to measure elapsed time to the nearest minute for certain operational activities and to record down time.
- 4.3 Special gage to measure scrap depth in canister
- 4.4 Sludge Collection Tray
- 4.5 Grid Plate with 1 inch markings
- 4.6 One inch sieve for separating fine scrap
- 4.7 Sludge Pickup Adapter and Installation Fixture
- 4.8 Turbidimeter near Process Table
- 4.9 PCM Discharge Radiation Monitor
- 4.10 Continuous Air Monitor (CAM) with recording of Krypton 85 concentration in local operator area near Decapping Station
- 4.11 Items Listed in Functional Test Procedures (FTP):
  - 4.10.1 Fuel basket
  - 4.10.2 Jib crane with empty basket grapple attached in corridor #7
  - 4.10.3 1 ton monorail hoist with empty basket grapple attached at monorail 27 extension
  - 4.10.4 Pallet jack in corridor #10
  - 4.10.5 Basin transfer cart in corridor #7
  - 4.10.6 Long pole hook
  - 4.10.7 Long pole tool
  - 4.10.8 Modified peters tool
  - 4.10.9 Rope hook
  - 4.10.10 Empty Type MK I and MK II fuel canisters
  - 4.10.11 Telescoping stiffback
  - 4.10.12 Decapping tools
  - 4.10.13 Debris bin
  - 4.10.14 Canister lid debris bin
  - 4.10.15 Closed Circuit Television (CCTV)



---

**SPENT NUCLEAR FUEL PROJECT****Procedure Number: SNF-5952****Phased Startup Initiative****Revision: 1****Phase 3/4 Test Procedure****Effective Date: 8/7/00****(OCRWM)****Page 10 of 42**

---

- 4.10.16 Gas tube crimper and cutting tool
- 4.10.17 Deionized (DI) water hose
- 4.10.18 Air compressor (minimum 150 scfm, 90 psig) for IWTS air sparge process
- 4.10.19 Sparger (also called "spray wand")

**5.0 SAFETY, PRECAUTIONS, AND LIMITATIONS****5.1 General Safety**

- 5.1.1 If an abnormal or unexpected condition arises during the performance of this test, the associated systems will be placed in a safe and stable condition. The OTD will evaluate and implement required actions.
- 5.1.2 Any equipment or facility damage resulting from an abnormal or unexpected condition requires that the test be terminated after placing the associated systems in a safe and stable condition. The OTD, along with the Facility Manager (or designee), will determine restart conditions.

**5.2 Personnel**

- 5.2.1 Personnel on the test team shall conduct themselves and the test in accordance with ALARA practices. If testing is delayed or direct observation is not required unessential personnel will leave the radiological buffer area/radioactive material area (RBA/RMA) or report to the standby area as indicated on the survey map.
- 5.2.2 Personnel on the test team shall immediately bring any personnel safety concerns to the attention of the OTD, the Facility Manager, or the Shift Supervisor for immediate resolution.

**5.3 Equipment**

- 5.3.1 If used in automatic sequence mode, the IWTS control system should not be started more than twice within any five minute period.

**5.4 Environment**

- 5.4.1 The high-efficiency particulate air (HEPA) filters associated with the filter vessel vent are an environmental effluent control device. The HEPA filters must be installed and operational before the filter vessels are allowed to vent or air sparging is allowed to take place with radioactive air emissions.

## **6.0 PERSONNEL REQUIREMENTS**

6.1 Personnel of the following types will be needed to support performance of this test:

<u>Classification</u>	<u>*Quantity</u>	
Quality Assurance Engineer/Inspector (QAE/I)	1	
Operator	4	
Rad. Con.	2	
Fuel Cleanliness Inspection Team (minimum of three during Test performance)	5	
TEs	2	
ETD (the ETD is one member of the Fuel Cleanliness Inspection Team)	1	
OTD	1	

\*Additional numbers of each personnel type may be required at different times during Test performance.

## **7.0 REQUIRED DOCUMENTS AND REFERENCES**

### **7.1 Primary References**

<b><u>Procedure Number</u></b>	<b><u>Procedure Title</u></b>
FTP-OP-PSI-054W	Process Table Fuel Operations (OCRWM)
FTP-OP-PSI-055W	Fuel Decap/Wash Operations
FTP-OP-PSI-059W	Loading and Capping of Fuel/Scrap Canisters

### **7.2 Other References**

<b><u>Procedure Number</u></b>	<b><u>Procedure Title</u></b>
FTP-OP-70-001W	Perform Normal IWTS Electrical Lineup at 105-KW
FTP-OP-70-002W	Perform Initial IWTS Manual Valve Lineup at 105-KW
FTP-OP-70-003W	Fill And Vent IWTS Filter System at 105-KW
FTP-OP-70-004W	Fill And Vent IWTS Distribution Header at 105-KW
FTP-OP-70-005W	Operate IWTS at 105-KW
FTP-OP-70-006W	Backwash Garnet Filter at 105-KW
FTP-OP-70-007W	Top Sparge Garnet Filter
FTP-OP-70-008W	Air Sparge Garnet Filter
FTP-OP-70-009W	Install IWTS IXMs at 105-KW
FTP-OP-70-0010W	Isolate Drain and Remove IWTS IXM at 105-KW
FTP-OP-70-0011W	Switch IWTS IXM Flow at 105-KW
FTP-OP-70-0012W	Perform FRS/IWTS Patrol
FTP-OP-70-0013W	Change Out Knockout Pots
FTP-OP-70-0015W	Collect IWTS IXM Water Samples at 105-KW
FTP-OP-70-050W	Transfer Fuel Baskets from Corridor 10 to Basin
FTP-OP-70-051W	Normal Startup/Shutdown of Manipulator System
FTP-OP-70-053W	Assume EOC Operations
FTP-OP-70-056W	Flexible Transfer Crane
FTP-OP-70-057W	Exercise Manipulator Joints
FTP-OP-70-058W	Sample HPU Hydraulic Fluid
FTP-OP-70-060W	Exercise Manipulator Arms
FTP-OP-70-061W	Off Gas System Operation

---

**SPENT NUCLEAR FUEL PROJECT****Procedure Number: SNF-5952****Phased Startup Initiative****Revision: 1****Phase 3/4 Test Procedure****Effective Date: 8/7/00****(OCRWM)****Page 14 of 42**

---

OP-07-113W	Position and Secure Irradiated Fuel at 105 KW
OP-14-002	Perform Pre-Use Test on Hoists
OP-16-002W	Operate Demineralized Water Hose Bib System at 105 KW
OP-43-015	Collect Special Water Samples from Routine Sample Locations
OP-43-035W	Collect Center of Basin Air Permit Water Sample
RP-05-035	Operation of the Triton KR-85 Monitor

**7.3 Drawings**

H-1-83302	KW Fuel Storage Basin IWTS P&ID
H-1-83944	KW Fuel Storage Basin FRS P&ID

**SPENT NUCLEAR FUEL PROJECT****Phased Startup Initiative****Phase 3/4 Test Procedure****(OCRWM)****Procedure Number: SNF-5952****Revision: 1****Effective Date: 8/7/00****Page 15 of 42****8.0 PREREQUISITE ACTIONS**

Prerequisite actions may be performed in any order.

Items must be satisfied prior to beginning Daily Pre-Startup Checklist.

**Test Engineers Pre-Startup Checklist (perform once prior to starting test):**

	Action	Initial/Date	Comments
1	Open items have been evaluated and verified to not affect the performance of this test  NOTE: Type of open items to evaluate include Quality Assurance (QA) nonconformance reports, construction punch list, outstanding engineering or design change notices, startup field requests, or test deficiency reports.		
2	A walkdown inspection of the equipment associated with this test procedure has been performed. All components are labeled in accordance with the approved drawings listed in Section 7.3.		
3	Perform an initial briefing for personnel involved in the performance of this test.		
4	Perform the ALARA Pre-Implementation meeting for personnel involved in the performance of this test.		
5	The ETD has determined appropriate interface and support personnel from other organizations have been notified and are available.		
6	OTD notified of scheduled Test and Time.		
7	Verify that the Fuel Inspection Team members are notified prior to commencement of testing. (preferably 24 hours)		
8	Verify that the Spent Nuclear Fuel (SNF) QA is notified prior to commencement of testing. (preferably 24 hours)		
9	Verify that the DOE facility representative is notified prior to commencement of testing. (preferably 24 hours)		

**SPENT NUCLEAR FUEL PROJECT**  
**Phased Startup Initiative**  
**Phase 3/4 Test Procedure**  
**(OCRWM)**

**Procedure Number: SNF-5952**

**Revision: 1**

**Effective Date: 8/7/00**

**Page 16 of 42**

10	Verify that Security is notified prior to commencement of testing. (preferably 24 hours)			
11	Verify that FTP-OP-PSI-054W, FTP-OP-PSI-055W, and FTP-OP-PSI-059W in Section 7.1 are the current revision. Record those document revision numbers in the comments section of the Phase 3/4 FRS/IWTS Data Sheet.			
12	Installed equipment calibrations verified and logged on "Installed Equipment Calibration Log" (Attachment D).			
13	Verify Measuring and Test Equipment (M&TE) required has current calibration and logged on "Test Equipment Calibration Log" (Attachment C).			
14	Ensure three extra MKII canisters for testing are staged in the decapping staging area.			
15	Review prerequisite actions from reference FTPs and ensure no foreseeable conditions exist which would prevent completion of these prerequisites at the required time in the Phase 3 Test.			
16	All mock fuel and debris removed from process table.			
17	Pre-operation Acceptance Test Procedure SNF-A.9-PAT-002A, Rev. 0, ITWS Knockout Pot, is complete and data indicating the initial Knockout Pot weight measured with the hose connected are available for entry on the Phase 3/4 FRS/IWTS Data Sheet for the first canister.			
18	Preliminary tests defined in SNF-6030, Rev. 0, Weigh Station and Grid Plate Testing, are complete and data indicating the initial PCM strainer basket weight are available for entry on the Phase 3/4 FRS/IWTS Data Sheet for the first canister.			

I have reviewed the above prerequisites and initial conditions. The prerequisites and initial conditions that are required to commence Section 9.0 are complete. I recommend that this PSI Test be released for performance.

Engineering Test Director \_\_\_\_\_ Date \_\_\_\_\_

---

**SPENT NUCLEAR FUEL PROJECT****Procedure Number: SNF-5952****Phased Startup Initiative****Revision: 1****Phase 3/4 Test Procedure****Effective Date: 8/7/00****(OCRWM)****Page 17 of 42**

---

I have reviewed the above prerequisites and initial conditions. The prerequisites and initial conditions that are required to commence Section 9.0 are complete. I recommend that this PSI Test be released for performance.

Operations Test Director \_\_\_\_\_ Date \_\_\_\_\_  
(OTD)




**SPENT NUCLEAR FUEL PROJECT**  
**Phased Startup Initiative**  
**Phase 3/4 Test Procedure**  
**(OCRWM)**

**Procedure Number: SNF-5952**  
**Revision: 1**  
**Effective Date: 8/7/00**  
**Page 18 of 42**

**DAILY PRE-STARTUP CHECKLIST (perform prior to starting each day of test activity):**

	<b>Action</b>	<b>Initial/Date</b>	<b>Comments</b>
1	Required Witnesses Available: QAE/I ____ Fuel Inspection Team ____		
2	Verify test personnel and witnesses have read and signed AJHA.		
3	Personnel who will be involved with this procedure have provided the required signature verification information on the "Pre-Job Safety Briefing Signature Sheet" (Attachment F).		
4	IWTS operating with IXM inlet radiation monitor and strip chart recorder activated.		
5	FRS operational and ready to process fuel.		
6	Manipulator system started-up and ready to process fuel.		
7	Campaign Letter.		
8	Scrap Basket cover installed.		
9	Record center of basin grab sample number and obtain analysis results.		
Daily PreStartup Checklist Verified Complete _____ Date _____			

PSI Phase 3 Flow Diagram

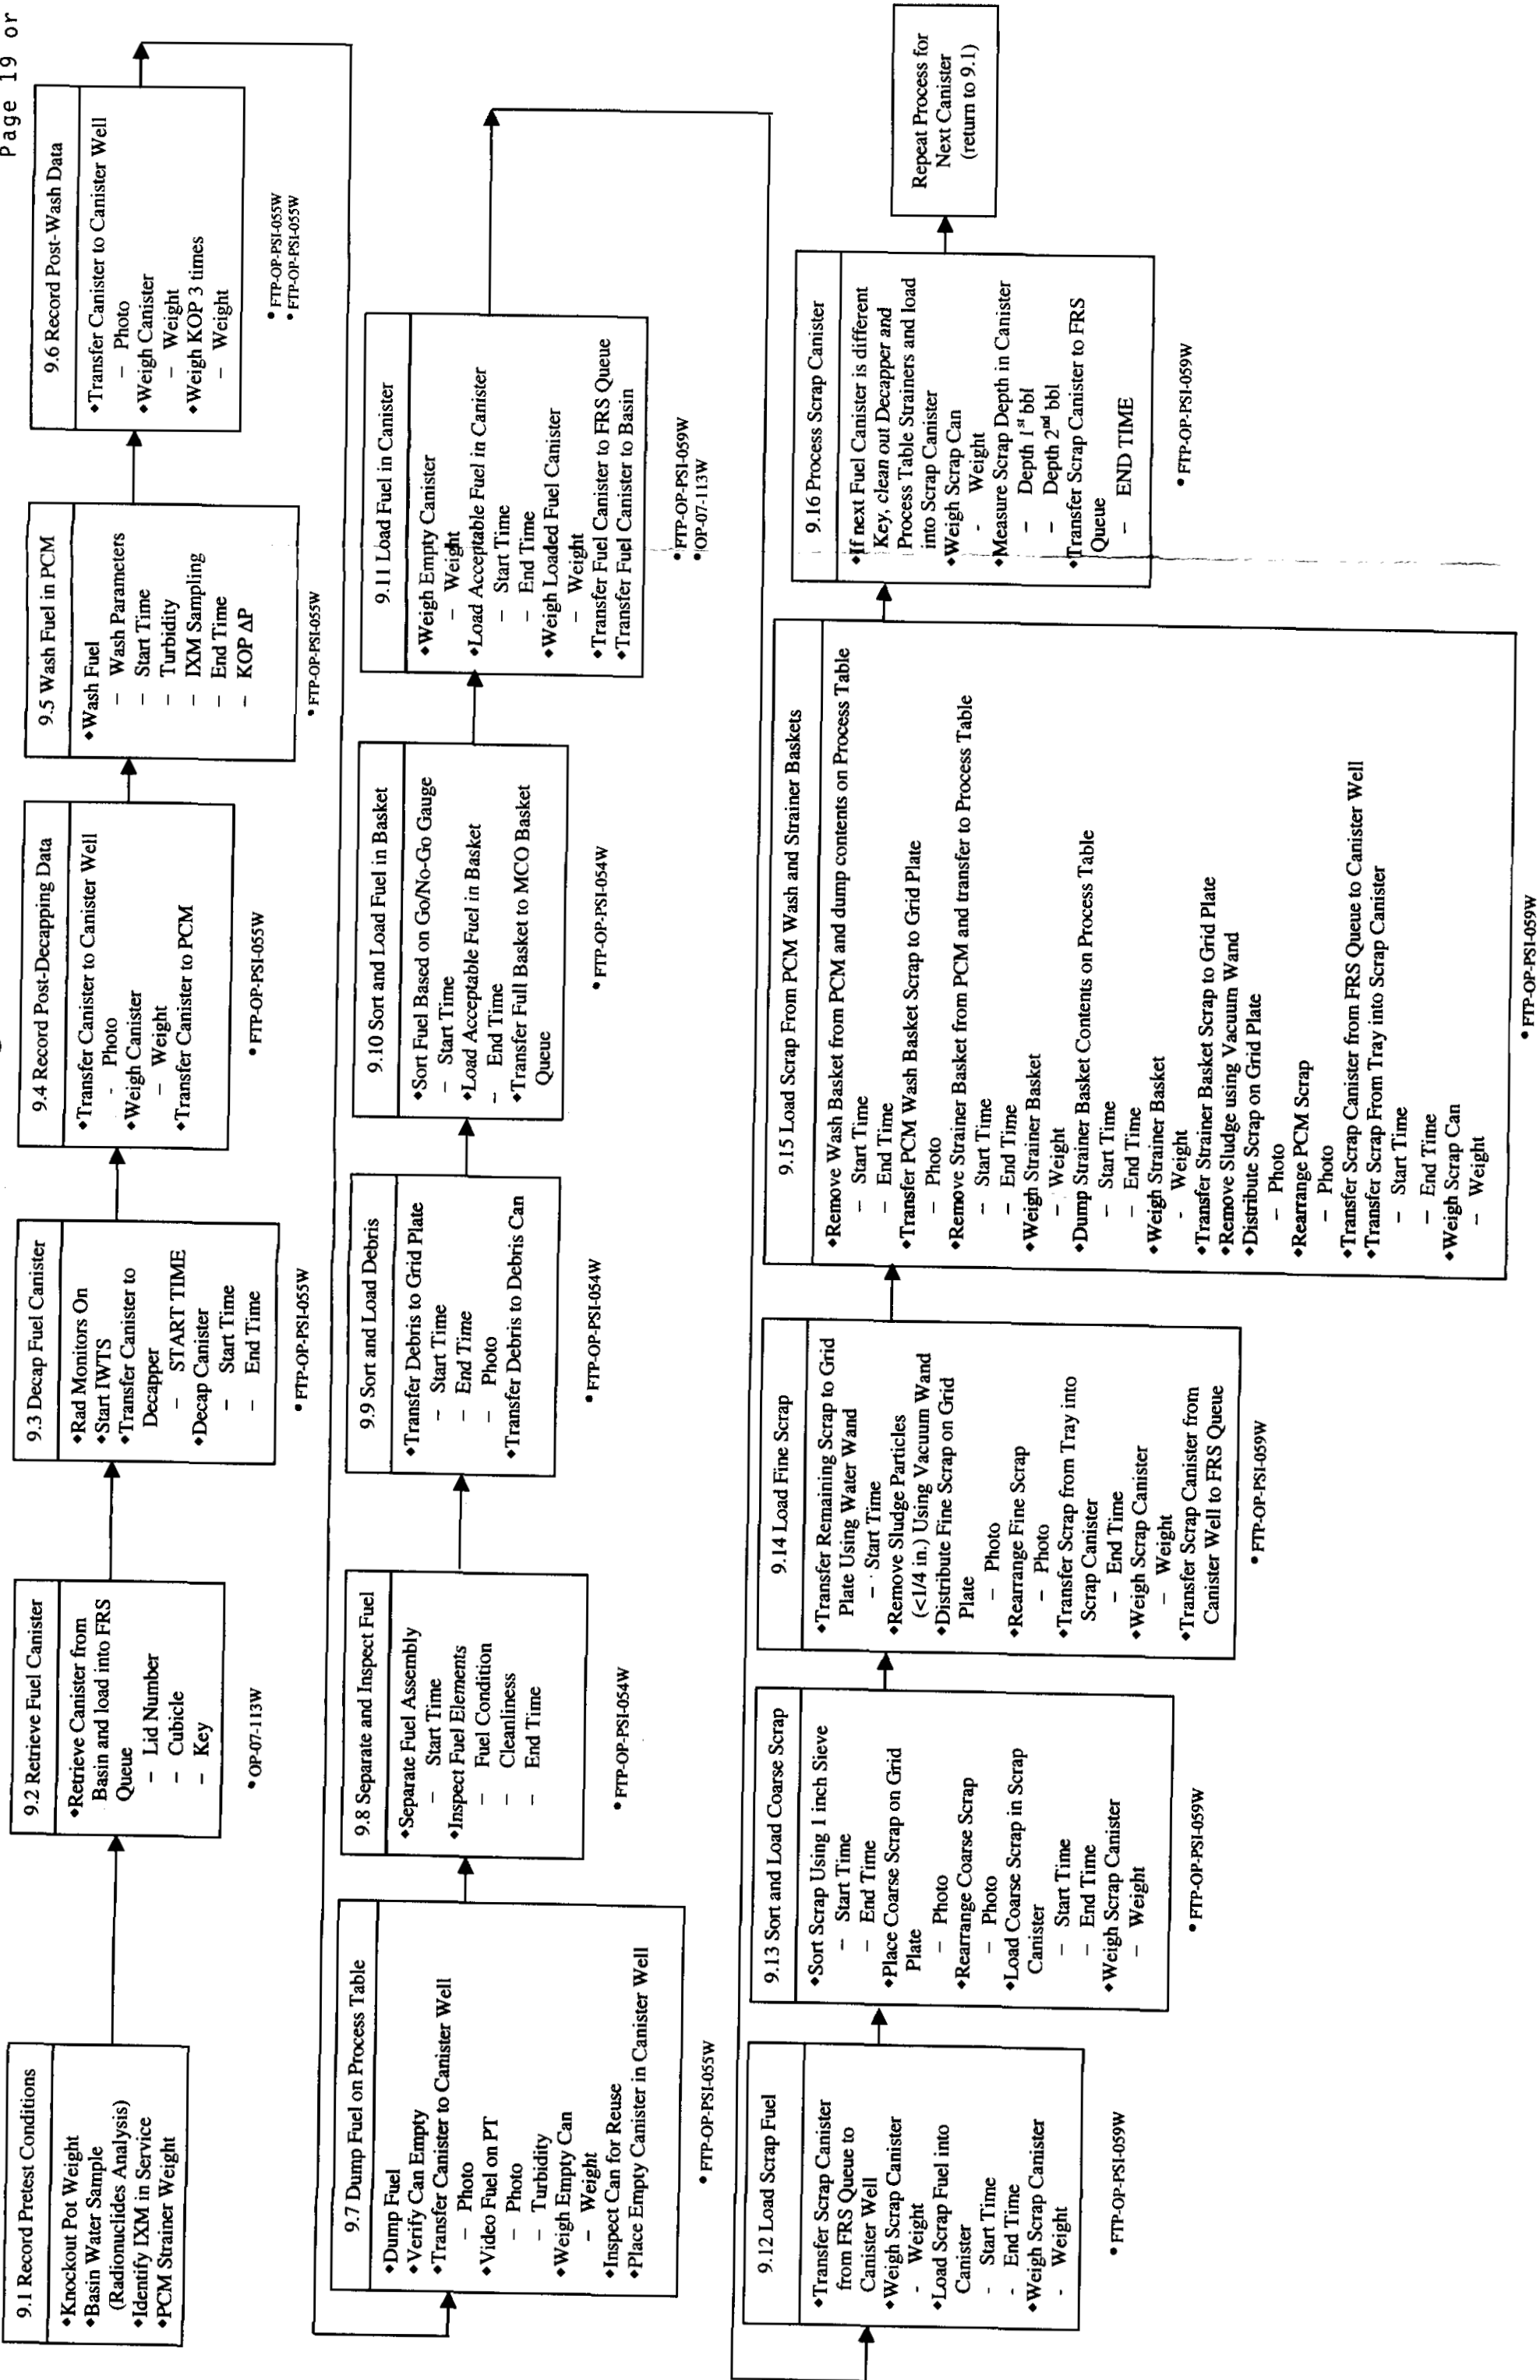

**9.0 PROCEDURE STEPS****9.1 Record Pretest Conditions**

1. Signature verifications on Section 8.0 Checklists signify that the Prerequisite Actions are complete.
2. Signature verification on Phase 3/4 FRS/IWTS Data Sheet signifies that the current procedure revision of FTP-OP-PSI-054W, FTP-OP-PSI-055W, and FTP-OP-PSI-059W is being used. This verification also confirms that any changes to the primary references in Section 7.1 have been evaluated for any effect to this Test Procedure. Any required changes to this Test Procedure shall be incorporated by an Engineering Change Notice (ECN) and approved by Engineering, Environmental, Operations, Nuclear Safety, and QA.

DP-1      3. Record Knockout Pot (KOP) Load Cell Tare Weight indicated on the Phase 3/4 FRS/IWTS Data Sheet for the previous canister processed (note data source in data sheet comments).

DP-2      4. Record KOP weight data from the end weights indicated on the Phase 3/4 FRS/IWTS Data Sheet for the previous canister processed (note data source in data sheet comments).

NOTE: If this is the first canister processed, Knockout Pot weight is obtained from Pre-operational Acceptance Test SNF-A.9-PAT-002A results.

DP-3      5. Record sample number for the center of basin grab sample, obtained per Process Standard 408, on the Phase 3/4 FRS/IWTS Data Sheet.

DP-4      6. Identify IXMs in service and record on Phase 3/4 FRS/IWTS Data Sheet.

DP-5      7. Record PCM Strainer Scale Tare Weight indicated on the Phase 3/4 FRS/IWTS Data Sheet for the previous canister processed (note data source in data sheet comments).

DP-6      8. Record PCM Strainer Weight data from the end weight indicated on the Phase 3/4 FRS/IWTS Data Sheet for the previous canister processed (note data source in data sheet comments).

NOTE: If this is the first canister processed, the empty PCM strainer weight is obtained from preliminary tests defined in SNF-6030.

## **9.2 Retrieve Fuel Canister**

1. Request Operations to position fuel canister listed in the Fuel Campaign letter in fuel queue. (OP-07-113W)
- DP-7 2. Record the following data on Phase 3 /4 FRS/IWTS Data Sheet:
  - Date
  - Phase
  - Canister Lid #
  - Cubicle Location
  - Key #

## **9.3 Decap Fuel Canister**

1. Request OTD to verify with RadCon Supervisor that Krypton 85 Monitor is in operation per RP-05-035.
2. Request OTD to activate Decapper/PCM Discharge Radiation Monitor.  
  
NOTE: Signature verification on Phase 3 /4 FRS/IWTS Data Sheet signifies that the Decapper/PCM Discharge Radiation Monitor is activated.
3. Request OTD to start with Decapping process (FTP-OP-PSI-055W).
- DP-8 4. Record START TIME on Phase 3/4 FRS/IWTS Data Sheet.
- DP-9 5. Record Decapping Start Time on Phase 3/4 FRS/IWTS Data Sheet.
- DP-10 6. Record Decapping End Time on Phase 3 /4 FRS/IWTS Data Sheet.

## **9.4 Obtain Post-Decapping Data**

1. Request OTD to remove decapped canister from Decapping Station (FTP-OP-PSI-055W).
- DP-11 2. Record Top View Photograph of fuel in decapped canister.  
  
NOTE: Signature verification on Phase 3/4 FRS/IWTS Data Sheet signifies that Top Photo has been recorded.
3. Notify OTD that photograph has been recorded.
- DP-12 4. Record Scale Tare Weight on Phase 3/4 FRS/IWTS Data Sheet.
- DP-13 5. Record Canister Weight on Phase 3/4 FRS/IWTS Data Sheet.

**9.5 Wash Fuel in PCM**

1. Notify the OTD of the high-pressure pump (HPP) flow to be used in the next PCM cleaning cycle.
2. Notify the OTD whether operating time or other PCM cleaning cycle parameter changes are needed for the next PCM cleaning cycle.
3. Request OTD to start PCM Wash Cycle (FTP-OP-PSI-055W).
- DP-14 4. Record Wash Start Time on Phase 3/4 FRS/IWTS Data Sheet.
5. Request OTD to obtain Reading for Turbidity of Water midway through cleaning cycle.
- DP-15 6. Record Turbidity data on Phase 3/4 FRS/IWTS Data sheet.
- DP-16 7. Record Wash End Time on Phase 3/4 FRS/IWTS Data Sheet.
- DP-17 8. Record Knockout Pot Pressure Drop on Phase 3/4 FRS/IWTS Data Sheet.

**9.6 Record Post-Washed Data**

1. Record canister information on Phase 3/4 Cleaning Process Data Sheet (OCRWM)
2. Request OTD to obtain PCM operating parameters and record on Phase 3/4 Cleaning Process Data Sheet (OCRWM).
- DP-18 3. Record Top View Photograph of washed fuel in canister.  
NOTE: Signature verification on Phase 3/4 FRS/IWTS Data Sheet signifies that Top Photo has been recorded.
4. Notify OTD that photograph has been recorded.
- DP-19 5. Record Scale Tare Weight on Phase 3/4 FRS/IWTS Data Sheet.
- DP-20 6. Record Canister Weight on Phase 3/4 FRS/IWTS Data Sheet.
7. Request OTD to weigh Knockout Pot three times (FTP-OP-PSI-055W).
- DP-21 8. Record Load Cell Tare Weight on Phase 3/4 FRS/IWTS Data Sheet.
- DP-22 9. Record KOP Weight on Phase 3/4 FRS/IWTS Data Sheet.

**9.7 Dump Fuel on Process Table**

1. Request OTD to Dump Fuel onto Process Table (FTP-OP-PSI-055W).

- DP-23      2.      Record Top View Photograph of empty canister.  
NOTE: Signature verification on Phase 3/4 FRS/IWTS Data Sheet signifies that Empty Canister Top Photo has been recorded.
- DP-24      3.      Record Photograph of dumped fuel.  
Note: Signature verification on Phase 3/4 FRS/IWTS Data Sheet signifies Dumped Fuel Photo has been recorded.
4.      Notify OTD that fuel and canister photographs have been recorded.
5.      Request OTD to obtain Turbidity Reading.
- DP-25      6.      Record Turbidity on Phase 3/4 FRS/IWTS Data Sheet.  
NOTE: If canister contains stuck fuel, the dumped fuel shall be placed back into the canister and returned to Basin Storage.  
NOTE: If dumped fuel cannot be returned to the canister, it will be packaged into a new canister and returned to Basin Storage.
- DP-26      7.      Record "Yes" or "No" for Stuck Fuel on Phase 3/4 FRS/IWTS Data Sheet.
- DP-27      8.      Record Scale Tare Weight on Phase 3/4 FRS/IWTS Data Sheet.
- DP-28      9.      Record Empty Canister Weight on Phase 3/4 FRS/IWTS Data Sheet.

**9.8      Separate and Inspect Fuel**

1.      Ensure a minimum of three members of the fuel inspection team are present to evaluate fuel separation.
2.      Request OTD to proceed with sorting fuel elements (FTP-OP-PSI-054W).
- DP-29      3.      Record Fuel Inspection Start Time on Phase 3/4 FRS/IWTS Data Sheet.
4.      Start video recording of fuel inspection.
5.      Record Inspection Team Fuel Condition assessment of each fuel element/assembly viewed on Phase 3/4 FRS Cleaning Process Data Sheet
6.      Request OTD to provide alternate assembly view, if required.
7.      Record Inspection Team Cleanliness Assessment of Each Fuel Element viewed on Phase 3/4 FRS Cleaning Process Data Sheet .

8. Request OTD to provide alternate element and sludge collection tray views, if required.
9. Notify OTD when element inspection is complete.
10. Request OTD to clean sludge collection tray using vacuum wand or sludge pickup adapter if requested by Inspection Team.
11. Perform Steps 5 through 10 for each fuel element/assembly viewed in FTP-OP-PSI-054W.
12. Stop Fuel Inspection Video Tape.

NOTE: Signature verification on Phase 3/4 FRS/IWTS Data Sheet signifies that video of inspections has been recorded.

- DP-30      13. Record on Phase 3/4 FRS/IWTS Data Sheet the Inspection End Time.

#### **9.9 Sort and Load Debris**

1. Request Operations to sort and load debris (FTP-OP-PSI-054W).
- DP-31      2. Record Debris Sorting Start Time on Phase 3/4 FRS/IWTS Data Sheet.
- DP-32      3. Record Debris Sorting End Time on Phase 3/4 FRS/IWTS Data Sheet.
- DP-33      4. Record Photograph of debris.

NOTE: Signature verification on Phase 3/4 FRS/IWTS Data Sheet signifies that Photo of Debris has been recorded.

5. Notify OTD that debris photograph has been recorded.

#### **9.10 Sort and Load Fuel in Basket**

1. Request OTD to Sort Fuel through Go/No-Go Gauge.
- DP-34      2. Record Fuel Sort and Load Start Time on Phase 3/4 FRS/IWTS Data Sheet.
3. Consult with OTD to load fuel into MCO Fuel Basket
4. Request OTD to Load Fuel into MCO Fuel Basket.
- DP-35      5. Record Top View Photograph of Fuel loaded into MCO Fuel Basket.

NOTE: Signature verification on Phase 3/4 FRS/IWTS Data Sheet signifies that Fuel Basket Photograph has been recorded.

**SPENT NUCLEAR FUEL PROJECT**

Procedure Number: SNF-5952

**Phased Startup Initiative**

Revision: 1

**Phase 3/4 Test Procedure**

Effective Date: 8/7/00

**(OCRWM)**

Page 25 of 42

- |       |    |   |
|-------|----|---|
| DP-36 | 6. | Record Fuel Sort and Load End Time on Phase 3/4 FRS/IWTS Data Sheet.                      |
| DP-37 | 7. | Record number of Assemblies loaded into MCO Fuel Basket on Phase 3/4 FRS/IWTS Data Sheet. |

**9.11 Load Fuel in Canister**

- |       |    |  |
|-------|----|--|
|       | 1. | Request OTD to Load fuel in canister (FTP-OP-PSI-059W).                                |
| DP-38 | 2. | Record scale tare weight on Phase 3/4 FRS/IWTS Data Sheet.                             |
| DP-39 | 3. | Record Fuel Starting Canister Weight on Phase 3/4 FRS/IWTS Data Sheet.                 |
| DP-40 | 4. | Record Fuel Canister Loading Start Time on Phase 3/4 FRS/IWTS Data Sheet.              |
| DP-41 | 5. | Record Fuel Canister Loading End Time on Phase 3/4 FRS/IWTS Data Sheet.                |
| DP-42 | 6. | Record Scale Tare Weight on Phase 3/4 FRS/IWTS Data Sheet.                             |
| DP-43 | 7. | Record Loaded Canister Weight on Phase 3/4 FRS/IWTS Data Sheet.                        |
|       | 8. | Request OTD to transfer loaded fuel canister to Basin Storage location per OP-07-113W. |

**9.12 Load Scrap Fuel**

- |       |    |   |
|-------|----|---|
|       | 1. | Request OTD to load scrap fuel pieces larger than 3-inches in their greatest dimension (FTP-OP-PSI-059W). |
| DP-44 | 2. | Record Scale Tare Weight on Phase 3/4 FRS/IWTS Data Sheet.  |
| DP-45 | 3. | Record Scrap Fuel Canister Weight on Phase 3/4 FRS/IWTS Data Sheet.                                       |
| DP-46 | 4. | Record Scrap Fuel Loading Start Time on Phase 3/4 FRS/IWTS Data Sheet.                                    |
| DP-47 | 5. | Record Scrap Fuel Loading End Time on Phase 3/4 FRS/IWTS Data Sheet.                                      |
| DP-48 | 6. | Record Scale Tare Weight on Phase 3/4 FRS/IWTS Data Sheet.  |
| DP-49 | 7. | Record Scrap Canister Weight on Phase 3/4 FRS/IWTS Data Sheet.  |

**9.13 Sort and Load Coarse Scrap**

- |  |    |  |
|--|----|--|
|  | 1. | Request OTD to sort and load coarse scrap (FTP-OP-PSI-059W). |
|--|----|--|



- |       |     |   |
|-------|-----|---|
| DP-50 | 2.  | Record Coarse Scrap Sorting Start Time on Phase 3/4 FRS/IWTS Data Sheet.  |
| DP-51 | 3.  | Record Coarse Scrap Sorting End Time on Phase 3/4 FRS/IWTS Data Sheet.  |
| DP-52 | 4.  | Record first photograph of coarse scrap on grid plate.<br><br>NOTE: Signature Verification on Phase 3/4 FRS/IWTS Data Sheet signifies that First Photo of coarse scrap on grid plate has been recorded.   |
|       | 5.  | Notify OTD that first coarse scrap photograph has been recorded.  |
| DP-53 | 6.  | Record second photograph of coarse scrap on grid plate.<br><br>NOTE: Signature Verification on Phase 3/4 FRS/IWTS Data Sheet signifies that Second Photo of coarse scrap on grid plate has been recorded. |
|       | 7.  | Notify OTD that second coarse scrap photograph has been recorded.   |
| DP-54 | 8.  | Record Coarse Scrap Loading Start Time on Phase 3/4 FRS/IWTS Data Sheet.  |
| DP-55 | 9.  | Record Coarse Scrap Loading End Time on Phase 3/4 FRS/IWTS Data Sheet.  |
| DP-56 | 10. | Record Scale Tare Weight on Phase 3/4 FRS/IWTS Data Sheet.  |
| DP-57 | 11. | Record Scrap Canister Weight on Phase 3/4 FRS/IWTS Data Sheet.  |

**9.14 Load Fine Scrap**

- |       |    |  |
|-------|----|--|
|       | 1. | Request OTD to load fine scrap into canister (FTP-OP-PSI-059W).  |
| DP-58 | 2. | Record Fine Scrap Loading Start Time on Phase 3/4 FRS/IWTS Data Sheet.   |
| DP-59 | 3. | Record first photograph of scrap on grid plate.<br><br>NOTE: Signature Verification on Phase 3/4 FRS/IWTS Data Sheet signifies that First Photo of fine scrap on grid plate has been recorded. |
|       | 4. | Notify OTD that first fine scrap photograph has been recorded.   |

- DP-60      5.      Record second photograph of fine scrap on grid plate.  
NOTE: Signature Verification on Phase 3/4 FRS/IWTS Data Sheet signifies that Second Photo of fine scrap on grid plate has been recorded.
6.      Notify OTD that second fine scrap photograph has been recorded.

DP-61      7.      Record Fine Scrap Loading End Time on Phase 3/4 FRS/IWTS Data Sheet.

DP-62      8.      Record Scale Tare Weight OTD on Phase 3/4 FRS/IWTS Data Sheet.

DP-63      9.      Record Scrap Canister Weight on Phase 3/4 FRS/IWTS Data Sheet.

**9.15 Load Scrap from PCM Wash and Strainer Baskets**

1.      Request OTD to load PCM wash and strainer basket scrap into canister per FTP-OP-PSI-059W.
- DP-64      2.      Record PCM Wash Basket Clean-Out Start Time on Phase 3/4 FRS/IWTS Data Sheet.
- DP-65      3.      Record PCM Wash Basket Clean-Out End Time on Phase 3/4 FRS/IWTS Data Sheet.
- DP-66      4.      Record PCM wash basket scrap photograph on grid plate .  
NOTE: Signature Verification on Phase 3/4 FRS/IWTS Data Sheet signifies that PCM Wash Basket photograph has been recorded.
5.      Notify OTD that PCM wash basket scrap photograph has been recorded.
- DP-67      6.      Record PCM Strainer Removal Start Time on Phase 3/4 FRS/IWTS Data Sheet.
- DP-68      7.      Record PCM Strainer Removal End Time on Phase 3/4 FRS/IWTS Data Sheet.
- DP-69      8.      Record Scale Tare Weight on Phase 3/4 FRS/IWTS Data Sheet.
- DP-70      9.      Record Strainer Weight on Phase 3/4 FRS/IWTS Data Sheet.
- DP-71      10.      Record PCM Strainer Cleanout Start Time on Phase 3/4 FRS/IWTS Data Sheet.
- DP-72      11.      Record PCM Strainer Cleanout End Time on Phase 3/4 FRS/IWTS Data Sheet.

**SPENT NUCLEAR FUEL PROJECT****Procedure Number: SNF-5952****Phased Startup Initiative****Revision: 1****Phase 3/4 Test Procedure****Effective Date: 8/7/00****(OCRWM)****Page 28 of 42**

- |       |     |   |
|-------|-----|---|
| DP-73 | 12. | Record Scale Tare Weight on Phase 3/4 FRS/IWTS Data Sheet.  |
| DP-74 | 13. | Record PCM Strainer Weight on Phase 3/4 FRS/IWTS Data Sheet.  |
| DP-75 | 14. | Record first PCM wash basket scrap and strainer scrap photograph on grid plate.<br><br>NOTE: Signature Verification on Phase 3/4 FRS/IWTS Data Sheet signifies that first photo of PCM wash and strainer scrap has been recorded. |
|       | 15. | Notify OTD that first PCM wash basket scrap and strainer scrap photograph has been recorded.  |
| DP-76 | 16. | Record second photograph of scrap on grid plate.<br><br>NOTE: Signature Verification on Phase 3/4 FRS/IWTS Data Sheet signifies that second photo of PCM Strainer Scrap has been recorded.  |
|       | 17. | Notify OTD that second PCM wash basket scrap and strainer scrap photograph has been recorded.   |
| DP-77 | 18. | Record PCM Scrap Loading Start Time on Phase 3/4 FRS/IWTS Data Sheet.   |
| DP-78 | 19. | Record PCM Scrap Loading End Time on Phase 3/4 FRS/IWTS Data Sheet.   |
| DP-79 | 20. | Record Scale Tare Weight on Phase 3/4 FRS/IWTS Data Sheet.  |
| DP-80 | 21. | Record Scrap Canister Weight on Phase 3/4 FRS/IWTS Data Sheet.  |

**9.16 Process Scrap Canister**

- |       |    |   |
|-------|----|---|
|       | 1. | Request OTD to process scrap canister per FTP-OP-PSI-059W.                    |
| DP-81 | 2. | Record Scale Tare Weight on Phase 3/4 FRS/IWTS Data Sheet, if applicable.     |
| DP-82 | 3. | Record Scrap Canister Weight on Phase 3/4 FRS/IWTS Data Sheet, if applicable. |
| DP-83 | 4. | Record Scrap Depth on Phase 3/4 FRS/IWTS Data Sheet.                          |
| DP-84 | 5. | Record END TIME on Phase 3/4 FRS/IWTS Data Sheet.                             |

**10.0 DATA SHEETS**

Examples of the following data sheets are attached.

Attachment A	Phase 3/4 FRS/IWTS Data Sheet.
Attachment B	FRS Cleaning Process Data Sheet
Attachment C	Test Equipment Calibration Log
Attachment D	Installed Equipment Calibration Log
Attachment E	End of Shift Test Status Report
Attachment F	Pre-Job Safety Briefing Signature Sheet

# SPENT NUCLEAR FUEL PROJECT

Phased Startup Initiative

Phase 3/4 Test Procedure

(OCRWM)

Procedure Number: SNF-5952

Revision: 1

Effective Date: 8/7/00

Page 30 of 42

PAGE 1 OF 7

## ATTACHMENT A PHASE 3/4 FRS/IWTS DATA SHEET

Date _____	Phase _____	Phase 3/4 FRS/IWTS Data Sheet	Canister Lid Number _____
Step	DP	Data	Comments/Down Time/ Date Change
9.1 Record Pretest Conditions Complete _____ / _____	DP-1 DP-2a DP-2b DP-2c DP-3 DP-4 DP-5 DP-6	Procedure Revision Numbers Current and Incorporated _____ / _____ Load Cell Tare Weight _____ lb. 1 <sup>st</sup> KOP Weight _____ lb. 2 <sup>nd</sup> KOP Weight _____ lb. 3 <sup>rd</sup> KOP Weight _____ lb. Basin Water Radionuclides _____ IXMs in Service _____ Scale Tare Weight _____ lb. PCM Strainer Weight _____ lb.	
9.2 Retrieve Fuel Canister Complete _____ / _____	DP-7a DP-7b	Cubicle _____ Key Number _____	
9.3 Decap Fuel Canister Complete _____ / _____	DP-8 DP-9 DP-10	Decapper/PCM Discharge Radiation Monitor On _____ / _____ START TIME _____ Decapping Start Time _____ Decapping End Time _____	
9.4 Obtain Post-Decapping Data Complete _____ / _____	DP-11 DP-12 DP-13	Top Photo _____ Scale Tare Weight _____ lb. Canister Weight _____ lb.	

**SPENT NUCLEAR FUEL PROJECT**  
**Phased Startup Initiative**  
**Phase 3/4 Test Procedure**  
**(OCRWM)**

**Procedure Number: SNF-5952**  
**Revision: 1**  
**Effective Date: 8/7/00**  
**Page 31 of 42**  
**PAGE 2 of 7**

**ATTACHMENT A PHASE 3 /4 FRS/IWTS DATA SHEET**

Date _____	Phase _____	Phase 3/4 FRS/IWTS Data Sheet	Canister Lid Number _____
<b>Step</b>	<b>DP</b>	<b>Data</b>	<b>Comments/Down Time/ Date Change</b>
9.5 Wash Fuel in PCM  Complete _____ / _____	DP-14 DP-15 DP-16 DP-17	Decapper/PCM Discharge Radiation Monitor On _____ / _____  Wash Start Time _____ Turbidity _____ NTU Wash End Time _____ KOP Δ P _____ psi	
9.6 Record Post Washed Data  Complete _____ / _____	DP-18 DP-19 DP-20 DP-21 DP-22a DP-22b DP-22c	Top Photo _____ Scale Tare Weight _____ lb. Canister Weight _____ lb. Load Cell Tare Weight _____ lb. 1 <sup>st</sup> KOP Weight _____ lb. 2 <sup>nd</sup> KOP Weight _____ lb. 3 <sup>rd</sup> KOP Weight _____ lb.	

# SPENT NUCLEAR FUEL PROJECT

Phased Startup Initiative

Phase 3/4 Test Procedure

(OCRWM)

Procedure Number: SNF-5952

Revision: 1

Effective Date: 8/7/00

Page 32 of 42

PAGE 3 of 7

## ATTACHMENT A PHASE 3 /4 FRS/IWTS DATA SHEET

Date _____	Phase _____	DP	Phase 3/4 FRS/IWTS Data Sheet	Canister Lid Number _____
Step			Data	Comments/Down Time/ Date Change
9.7 Dump Fuel on Process Table  Complete _____ / _____	DP-23	Empty Canister Top Photo _____ / _____		
	DP-24	Dumped Fuel Photo _____ / _____		
	DP-25	Turbidity _____ NTU		
	DP-26	Stuck Fuel? Yes _____ No _____		
	DP-27	Scale Tare Weight _____ lb.		
	DP-28	Empty Canister Weight _____ lb.		
9.8 Separate and Inspect Fuel  Complete _____ / _____	DP-29	Fuel Inspection Start Time _____		
	DP-30	Inspection Video Recorded _____ / _____ Fuel Inspection End Time _____		
9.9 Sort and Load Debris  Complete _____ / _____	DP-31	Debris Sorting Start Time _____		
	DP-32	Debris Sorting End Time _____		
	DP-33	Debris Photo _____ / _____		
9.10 Sort and Load Fuel in Basket  Complete _____ / _____	DP-34	Fuel Sort and Load Start Time _____		
	DP-35	Fuel Basket Top Photo _____ / _____		
	DP-36	Fuel Sort and Load End Time _____		
		Fuel Loaded into Basket:		
	DP-37a	Number of Assemblies _____; Basket Number _____		
	DP-37b	Number of Assemblies _____; Basket Number _____		

# SPENT NUCLEAR FUEL PROJECT

Phased Startup Initiative

Phase 3/4 Test Procedure

(OCRWM)

Procedure Number: SNF-5952

Revision: 1

Effective Date: 8/7/00

Page 33 of 42

PAGE 4 of 7

## ATTACHMENT A PHASE 3 /4 FRS/IWTS DATA SHEET

Date _____	Phase _____	DP _____	Phase 3/4 FRS/IWTS Data Sheet	Canister Lid Number _____
Step			Data	Comments/Down Time/ Date Change
9.11 Load Fuel in Canister		DP-38	Scale Tare Weight _____ lb.	
Complete _____ / _____		DP-39	Starting Canister Weight _____ lb.	
		DP-40	Fuel Canister Loading Start Time _____	
		DP-41	Fuel Canister Loading End Time _____	
		DP-42	Scale Tare Weight _____ lb.	
		DP-43	Loaded Canister Weight _____ lb.	
9.12 Load Scrap Fuel		DP-44	Scale Tare Weight _____ lb.	
Complete _____ / _____		DP-45	Scrap Fuel Canister Weight _____ lb.	
		DP-46	Scrap Fuel Loading Start Time _____	
		DP-47	Scrap Fuel Loading End Time _____	
		DP-48	Scale Tare Weight _____ lb.	
		DP-49	Scrap Canister Weight _____ lb.	
9.13 Sort and Load Coarse Scrap		DP-50	Coarse Scrap Sorting Start Time _____	
Complete _____ / _____		DP-51	Coarse Scrap Sorting End Time _____	
		DP-52	1 <sup>st</sup> Photo Coarse Scrap _____ / _____	
		DP-53	2 <sup>nd</sup> Photo Coarse Scrap _____ / _____	
		DP-54	Coarse Scrap Loading Start Time _____	
		DP-55	Coarse Scrap Loading End Time _____	
		DP-56	Scale Tare Weight _____ lb.	
		DP-57	Scrap Canister Weight _____ lb.	



**SPENT NUCLEAR FUEL PROJECT**

Phased Startup Initiative

Phase 3/4 Test Procedure

(OCRWM)

Procedure Number: SNF-5952

Revision: 1

Effective Date: 8/7/00

Page 34 of 42

PAGE 5 of 7

**ATTACHMENT A PHASE 3 /4 FRS/IWTS DATA SHEET**

Date _____	Phase _____	Phase 3/4 FRS/IWTS Data Sheet	Canister Lid Number _____
Step	DP	Data	Comments/Down Time/ Date Change
9.14 Load Fine Scrap	DP-58	Fine Scrap Loading Start Time _____	
Complete _____ / _____	DP-59	1 <sup>st</sup> Photo Fine Scrap _____ / _____	
	DP-60	2 <sup>nd</sup> Photo Fine Scrap _____ / _____	
	DP-61	Fine Scrap Loading End Time _____	
	DP-62	Scale Tare Weight _____ lb.	
	DP-63	Scrap Canister Weight _____ lb.	

# SPENT NUCLEAR FUEL PROJECT

Phased Startup Initiative

Phase 3/4 Test Procedure

(OCRWM)

Procedure Number: SNF-5952

Revision: 1

Effective Date: 8/7/00

Page 35 of 42

PAGE 6 of 7

## ATTACHMENT A PHASE 3 /4 FRS/IWTS DATA SHEET

Date _____	Phase _____	Phase 3/4 FRS/IWTS Data Sheet	Canister Lid Number _____
Step	DP	Data	Comments/Down Time/ Date Change
9.15 Load Scrap from PCM Wash and Strainer Baskets	DP-64	PCM Wash Basket Cleanout	
Complete _____ / _____		Start Time _____	
	DP-65	PCM Wash Basket Cleanout	
		End Time _____	
	DP-66	PCM Wash Basket Scrap Photo _____ / _____	
	DP-67	PCM Strainer Removal Start Time _____	
	DP-68	PCM Strainer Removal End Time _____	
	DP-69	Scale Tare Weight _____ lb.	
	DP-70	PCM Strainer Weight _____ lb.	
	DP-71	PCM Strainer Cleanout Start Time _____	
	DP-72	PCM Strainer Cleanout End Time _____	
	DP-73	Scale Tare Weight _____ lb.	
	DP-74	PCM Strainer Weight _____ lb.	
	DP-75	1 <sup>st</sup> PCM Scrap Photo _____ / _____	
	DP-76	2 <sup>nd</sup> PCM Scrap Photo _____ / _____	
	DP-77	PCM Scrap Loading Start Time _____	
	DP-78	PCM Scrap Loading End Time _____	
	DP-79	Scale Tare Weight _____ lb.	
	DP-80	Scrap Canister Weight _____ lb.	

# SPENT NUCLEAR FUEL PROJECT

Phased Startup Initiative

Phase 3/4 Test Procedure

(OCRWM)

Procedure Number: SNF-5952

Revision: 1

Effective Date: 8/7/00

Page 36 of 42

PAGE 7 of 7

## ATTACHMENT A PHASE 3 /4 FRS/IWTS DATA SHEET

Date _____	Phase _____	Phase 3/4 FRS/IWTS Data Sheet	Canister Lid Number _____
Step	DP	Data	Comments/Down Time/ Date Change
9.16 Process Scrap Canister	DP-81	Scale Tare Weight _____ lb.	
Complete _____ / _____	DP-82	Scrap Canister Weight _____ lb.	
	DP-83a	Scrap Depth 1 <sup>st</sup> barrel _____ in.	
	DP-83b	Scrap Depth 2 <sup>nd</sup> barrel _____ in.	
	DP-84	END TIME _____	

Data Collection Complete: \_\_\_\_\_

QAE/I

Date

## Phased Startup Initiative Phase 3/4 Test Procedure (OCRWM)

**Procedure Number: SNF-5952**

**Revision: 1**

**Effective Date: 8/7/00**

Page 37 of 42

**ATTACHMENT B PHASE 3/4 FRS CLEANING PROCESS DATA SHEET (OCRWM)**  
**PAGE 1 OF 2**

Date: \_\_\_\_\_ Time: \_\_\_\_\_ CANISTER ID: \_\_\_\_\_

## CANISTER INFORMATION

Canister Type: \_\_\_\_\_ Mark I Aluminum, \_\_\_\_\_ Mark I Stainless Steel, \_\_\_\_\_ Mark II Stainless Steel

Fuel Type: MKIV, \_\_\_\_\_ MKIA, \_\_\_\_\_ SPR, \_\_\_\_\_ NAT

Key Number \_\_\_\_\_

## OPERATING PARAMETERS

**Cleaning Cycle Time = \_\_\_\_\_ minutes**

Number of PCM Rotations: \_\_\_\_\_

High Pressure Flush Nozzles Flow Rate: \_\_\_\_\_ gpm

Flush Nozzles Pressure: \_\_\_\_\_ psig

**Discharge Flow Rate (75 gpm or greater):**

Assembly	Inner/Outer	Fuel Condition				Inspection Results		Comments
		Intact	Breached	Defective	Bad	Clean	Not Clean	
1	Inner							
	Outer							
2	Inner							
	Outer							
3	Inner							
	Outer							
4	Inner							
	Outer							
5	Inner							
	Outer							
6	Inner							
	Outer							
7	Inner							
	Outer							
8	Inner							
	Outer							
9	Inner							
	Outer							
10	Inner							
	Outer							
11	Inner							
	Outer							
12	Inner							
	Outer							
13	Inner							
	Outer							
14	Inner							
	Outer							
Total								

**SPENT NUCLEAR FUEL PROJECT**  
**Phased Startup Initiative**  
**Phase 3/4 Test Procedure**  
**(OCRWM)**

**Procedure Number: SNF-5952**  
**Revision: 1**  
**Effective Date: 8/7/00**  
**Page 38 of 42**

Canister No. \_\_\_\_\_

**Attachment B Phase 3/4 FRS Cleaning Process Data Sheet (OCRWM) Page 2 of 2**

Comments:

**Fuel Inspection Team Members Signatures**

**Print Name**

**Signature**

**Date**

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

**SPENT NUCLEAR FUEL PROJECT**

Procedure Number: SNF-5952

Phased Startup Initiative

Revision: 1

Phase 3/4 Test Procedure

Effective Date: 8/7/00

(OCRWM)

Page 39 of 42

**ATTACHMENT C TEST EQUIPMENT CALIBRATION LOG**

## Measuring and Test Equipment (M&amp;TE) Calibration Log

Page \_\_\_\_ of \_\_\_\_

M&TE No.	M&TE Description (include accuracy)	Calibration Due Date	Range Used	Initial/Date

Notes:

**SPENT NUCLEAR FUEL PROJECT****Phased Startup Initiative****Phase 3/4 Test Procedure****(OCRWM)****Procedure Number: SNF-5952****Revision: 1****Effective Date: 8/7/00****Page 40 of 42****ATTACHMENT D INSTALLED EQUIPMENT CALIBRATION LOG****Installed Equipment Calibration Log**

Page \_\_\_\_ of \_\_\_\_

<b>Equipment No.</b>	<b>Equipment Description</b>	<b>Calibration Due Date</b>	<b>Range Used</b>	<b>Procedure Steps Where Used</b>	<b>Post-Test Calibration Date</b>	<b>Initial/Date</b>

**Note:**

**SPENT NUCLEAR FUEL PROJECT**  
**Phased Startup Initiative**  
**Phase 3/4 Test Procedure**  
**(OCRWM)**

**Procedure Number: SNF-5952**  
**Revision: 1**  
**Effective Date: 8/7/00**  
**Page 41 of 42**

**ATTACHMENT E END-OF SHIFT TEST STATUS REPORT, PSI PHASE 3/4**

**Page 1 of 1**

Date/Time: \_\_\_\_\_

Canister In-Process: \_\_\_\_\_ (original lid # or N/A)

---

**End of Shift Procedure Status**

**SNF-5952 Test Procedure Step**

Completed through end of shift: \_\_\_\_\_

Referenced FTP Step completed

Through end of shift: FTP #: \_\_\_\_\_

Step #: \_\_\_\_\_

Comments:

---

**Expected Test Restart Description**

Continue with SNF-5952 Test Procedure Step: \_\_\_\_\_

By performing (if required) FTP #: \_\_\_\_\_

Step #: \_\_\_\_\_

Comments (clarify planned next procedure step after daily prestart completed):

---

Prepared by: \_\_\_\_\_

Name/Signature/Date



[illegible]

## DISTRIBUTION SHEET

To	From	Page 1 of 1
Distribution	Process Engineering	Date 7/20/00
Project Title/Work Order		EDT No. N/A
Phased Startup Initiative Phase 3/4 Test Procedure (OCRWM)		ECN No. 661460

Name	MSIN	Text With All Attach.	Text Only	Attach./ Appendix Only	EDT/ECN Only
------	------	-----------------------------	-----------	------------------------------	-----------------

Spent Nuclear Fuel Project

R. D. Crowe	R3-26	X
P. E. Davis	X3-80	X
W. A. Decker	X3-68	X
J. A. Dent	X3-65	X
J. R. Frederickson	R3-86	X
S. D. Godfrey	X3-88	X
J. C. Gruber	X3-86	X
D. F. Hicks	S7-12	X
V. L. Hoefer	R3-86	X
J. A. Kimbrough	X3-65	X
S. B. Klekar	X3-65	X
J. J. Klos	X4-02	X
B. J. Knutson	B6-01	X
J. M. Kurta	X4-01	X
M. J. Langevin	X4-01	X
C. D. Lucas	X3-74	X
J. D. Mathews	X3-65	X
C. T. Miller	X3-79	X
W. C. Miller	R3-11	X
J. W. Niskas	R3-86	X
A. L. Pajunen (5)	R3-86	X
A. L. Pitner	R3-86	X
L. S. Semmens	X3-79	X
R. A. Sexton	R3-86	X
J. L. Shelor	X4-04	X
J. P. Sloughter	K9-46	X
D. W. Smith	S2-48	X
P. E. Stanley	X4-01	X
G. E. Stegen	X4-01	X
J. A. Swenson	R3-11	X
J. A. Thomason	X3-78	X
J. E. Truax	X3-71	X
D. J. Watson	X3-79	X
J. H. Wicks	X3-71	X
SNF Project	R3-11	X
SNF Training	S2-45	X
SNF Procedures	X3-86	X

U. S. Department of Energy – Richland Operations Office

R. M. Hiegel	R3-81	X
P. G. Loscoe	R3-81	X