

ABOUT WAVELET-BASED COMPUTATIONAL BEAM ANALYSIS WITH THE USE OF DAUBECHIES SCALING FUNCTIONS

*Marina L. Mozgaleva*¹, *Pavel A. Akimov*^{2, 3, 4, 5}, *Taymuraz B. Kaytukov*^{2, 6}

¹ National Research Moscow State University of Civil Engineering, Moscow, RUSSIA

² Russian Academy of Architecture and Building Sciences, Moscow, RUSSIA

³ Scientific Research Center "StadyO", Moscow, RUSSIA

⁴ Tomsk State University of Architecture and Civil Engineering, Tomsk, RUSSIA

⁵ Peoples' Friendship University of Russia, Moscow, RUSSIA

⁶ Central Institute for Research and Design of the Ministry of Construction and Housing and Communal Services of the Russian Federation, Moscow, RUSSIA

Abstract: The first part of the distinctive paper contains brief review of wavelet-based numerical and semianalytical analysis, particularly with the use of Daubechies scaling functions. The second part of the paper is devoted to numerical solution of the problem of static analysis of beam on elastic foundation within Winkler model. Finite element method (FEM) and wavelet analysis (Daubechies scaling functions) are used. Variational formulation and approximation of the problem are under consideration. Numerical sample is presented as well. The third part of the paper is dedicated to wavelet based discrete-continual finite element method of beam analysis with allowance for impulse load. Daubechies scaling functions are used as well.

Keywords: boundary problem, structural analysis, static analysis, dynamic analysis, beam analysis, numerical solution, finite element method, wavelet analysis, Daubechies scaling function, Daubechies wavelet, impulse load, review

О ВЕЙВЛЕТ-РЕАЛИЗАЦИЯХ ВЫЧИСЛИТЕЛЬНЫХ МЕТОДОВ РАСЧЕТА БАЛОЧНЫХ КОНСТРУКЦИЙ С ИСПОЛЬЗОВАНИЕМ МАСШТАБИРУЮЩИХ ФУНКЦИЙ ДОБЕШИ

*М.Л. Мозгалева*¹, *П.А. Акимов*^{2, 3, 4, 5}, *Т.Б. Кайтуков*^{2, 6}

¹ Национальный исследовательский Московский государственный строительный университет, г. Москва, РОССИЯ

² Российская академия архитектуры и строительных наук, г. Москва, РОССИЯ

³ Научно-исследовательский центр СтаДиО, г. Москва, РОССИЯ

⁴ Томский государственный архитектурно-строительный университет, г. Томск, РОССИЯ

⁵ Российский университет дружбы народов, г. Москва, РОССИЯ

⁶ Центральный научно-исследовательский и проектный институт Министерства строительства и жилищно-коммунального хозяйства, г. Москва, РОССИЯ

Аннотация: Настоящая статья в своей первой части содержит относительно краткий обзор вейвлет-реализаций численных и численно-аналитических методов решения краевых задач, в частности с использованием масштабирующих функций Добеши. Вторая часть статьи посвящена численному решению статической задачи об изгибе балки на упругом основании (в рамках модели Винклера). Для построения решения используются метод конечных элементов (МКЭ) в сочетании с аппаратом вейвлет-анализа (масштабирующие функции Добеши). Приведена вариационная (континуальная) формулировка задачи, описаны ее аппроксимация и построение численного решения, представлен пример расчета. В третьей части статьи описан вейвлет-реализация дискретно-континуального метода конечных элементов для расчета балки при ударе на основе использования масштабирующих функций Добеши.

Ключевые слова: краевая задача, расчеты строительных конструкций, статический расчет, динамический расчет, расчет балки, численное решение, метод конечных элементов, вейвлет-анализ, масштабирующая функция Добеши, вейвлет Добеши, ударная нагрузка, обзор

1. INTRODUCTION

As is known, the numerical analysis with wavelet (wavelet-based numerical analysis) received its first attention in 1992, since then (particularly since the corresponding basic work of I. Daubechies [1]) researchers have shown growing interest in it. Various methods including so-called wavelet weighted residual method, wavelet finite element method, wavelet-based numerical methods of local structural analysis [2-6], wavelet boundary method, wavelet meshless method, wavelet-optimized finite difference method, wavelet-based discrete-continual methods of local structural analysis [7-15], wavelet-based multigrid method [16] etc. have acquired an important role in recent years.

First of all, it should be noted that Daubechies scaling functions can be effectively employed within wavelet finite element method or within wavelet-based numerical and semianalytical (discrete-continual) methods of local structural analysis as approximate functions in the procedure of construction of so-called wavelet finite element [17].

Corresponding compact support property proves to be more effective in using minimum degrees of freedom over an element to approximate displacement functions. Moreover, sparseness of the matrix is a result of the scaling functions, which have the compactly supported property. Cancellation property allows one to perfectly interpolate polynomials of degree up to N by the scaling function with order N . Corresponding experiments gathered in the wavelet-Galerkin context indicate that orthogonal property satisfies the condition that the matrix is sparse as well as banded if the global nodes are numbered sequentially. Due to corresponding main properties, Daubechies wavelets can describe the details of the problem conveniently and accurately, and the corresponding Daubechies wavelets-based element has an enormous potential in the analysis of the singularity problem [17].

J. Ko, A.J. Kurdila and M.S. Pillant [18] developed special finite element method based on application of Daubechies wavelet. Corresponding algebraic eigenvalue problem derived from the dyadic refinement equation can be solved by this method. The resulting finite elements could be considered as several generalizations of the connection coefficients employed in the corresponding Daubechies wavelet expansion of periodic differential operators [17].

R.D. Patton and P.C. Marks [19] utilized a Daubechies scaling function as interpolation function of one-dimensional finite element. This element can reduce the computation time and reduce the number of degrees of freedom, which is normally needed for correct solution of vibration and wave propagation problems [17].

J.X. Ma and J.J. Xue in paper [20] constructed one-dimensional Daubechies wavelet beam element [17].

X.F. Chen, S.J. Yang and J.X. Ma [21] extended such elements to higher dimensions, constructed two-dimensional Daubechies wavelet element, derived the corresponding bending equations for the thin plate based on wavelet finite element, and solved the L-shape plate stress problems. Their results show that wavelet finite element can be effectively used for solution of singularity problems [17].

However, the tensor product space should be constructed firstly [22], which decreases the computational effectiveness [17].

J.M. Jin, P.X. Xue, Y.X. Xu and Y.L. Shu [23] built a two-dimensional Daubechies wavelet directly without tensor product computation and developed corresponding two-dimensional plate element [17].

Nevertheless, the wavelet deflection formulation depends on specific boundary conditions. Besides it is effective only for homogeneous boundary conditions for square plates. In addition, only simple boundary conditions were considered in above mentioned works. Triggered by this motivation, a modified form of wavelet ap-

proximation of deflection solution was proposed for solution of bending problems of beams and square thin plates by Y.H. Zhou and J. Zhou [24]. Boundary rotational degrees of freedom for beams and square plates were explicitly introduced as Daubechies wavelet coefficients in this paper. Thus variation equations were established with the use of corresponding modified approximations and variation principles. Homogeneous and non-homogeneous boundary conditions can be treated in the same way (by analogy with corresponding versions of conventional FEM [17]).

M. Mitra and S. Gopalakrishnan presented so-called Daubechies wavelet-based spectral finite element method (WSFEM) for analysis of elastic wave propagation in one-dimensional and two-dimensional connected wave guides [25-27]. First of all, this method transforms the initial partial differential wave equation to corresponding ordinary differential equations (ODEs) with the use of Daubechies wavelet approximation in time domain. Then these ODEs are solved within FEM by deriving the exact interpolating function in the transformed domain. Spectral element can capture the exact mass distribution. Therefore the system size required is very much smaller than the corresponding system size within the conventional FEM. Besides, due to the localized nature of Daubechies wavelet basis functions, the WSFEM proves to be more efficient as it removes the wrap around problem associated with spectral finite element method for time domain analysis.

M. Mitra and S. Gopalakrishnan [28] later extended the method and considered problems of analysis of composite beam with embedded delamination. However, the real-scale structural wave propagation problem requires more different complex spectral elements, interconnections and flexible in flatable components. In accordance with assessments from paper [17], future research work will focus on extending the spectral element method for analysis of damaged structures with more complex geometry [17]. Thus, Daubechies wavelets are used to approximate the displacement and force in the domain,

where unknown wavelet coefficients can be determined through imposing the essential boundary condition. The Daubechies wavelet finite elements embody the properties of locality and adaptivity. However, because Daubechies wavelets lack the explicit function expression, traditional numerical integrals such as Gaussian integrals cannot provide desirable precision. Therefore, the applications of Daubechies wavelets are limited by this weakness [17].

1. WAVELET-BASED NUMERICAL BEAM ANALYSIS WITH THE USE OF DAUBECHIES SCALING FUNCTIONS

1.1. Mathematical (continual) formulation of the problem of static beam analysis.

The essence of the Winkler model is the assumption that the reaction of the foundation $r(x)$ at an arbitrary point of the beam x is proportional to deflection at this point $r(x) = \beta y$. Therefore, graphically, such a model can be represented by springs that are not connected to each other, each of which has a stiffness proportional to the deflection of the beam at this point (Figure 1.1).

The stress-strain state of such a beam corresponds to the solution of the problem of the minimum of the following functional (energy functional) [29]:

$$\Phi(y) = \frac{1}{2} \int_0^l (EJ(y'')^2 + \beta y^2) dx - \int_0^l q(x)y dx, \quad (1.1)$$

where $EJ(x)$ is bending stiffness of beam; $\beta(x)$ is Winkler coefficient; $q(x)$ is applied load.

1.2. Wavelet-based finite element approximation of the problem of static beam analysis.

Let us divide domain (one-dimensional interval $(0, l)$), occupied by the beam into N_e parts (finite elements);

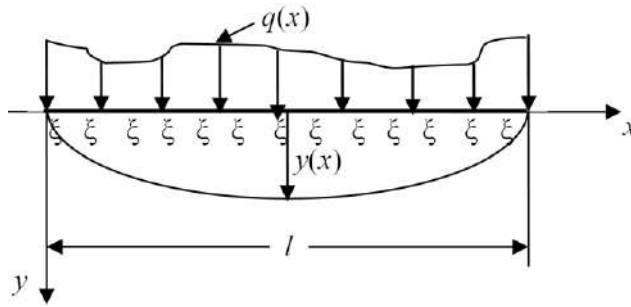


Figure 1.1. Computational scheme of beam.

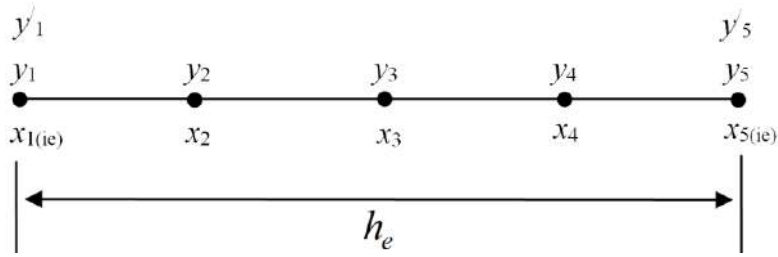


Figure 1.2. Sample of finite element.

$$h_e = l / N_e$$

Thus, the total (global) number of unknowns is equal to

$$N_g = N_p + 2N_b.$$

We have

$$\Phi(y) = \sum_{i_e=1}^{N_e} \Phi_{i_e}(y), \quad (1.2)$$

where

$$\Phi_{i_e}(y) = \frac{1}{2} \int_{x_1(i_e)}^{x_5(i_e)} (EJ(y'')^2 + \beta y^2) dx - \int_{x_1(i_e)}^{x_5(i_e)} qy dx. \quad (1.3)$$

Let us introduce the local coordinates:

$$t = (x - x_{1(i_e)}) / h_e, \quad x_{1(i_e)} \leq x \leq x_{5(i_e)}. \quad (1.4)$$

In this case, we have the following relations:

$$\begin{cases} x = x_{1(i_e)} \Rightarrow t = 0 \\ x = x_2 \Rightarrow t = 0.25 \\ x = x_3 \Rightarrow t = 0.5 \\ x = x_4 \Rightarrow t = 0.75 \\ x = x_{5(i_e)} \Rightarrow t = 1; \end{cases} \quad (1.5)$$

is the length of the element.

Each element is also divided into N_k parts, for example, $N_k = 4$ (Figure 1.2).

Let us introduce the following notation: i_e is element number; $x_1(i_e)$ is coordinate of the starting point of the i_e -th element; $x_5(i_e)$ is coordinate of the end point of the i_e -th element. At the boundary points (nodes), we can choose unknowns y_i and y'_i ; at the inner points we can choose unknowns y_i , $i = 2, 3, 4$. Thus, the total number of unknowns on an element is equal to

$$N = N_k - 1 + 2 \cdot 2 = N_k + 3 = 7.$$

The number of boundary points for all elements is equal to

$$N_b = N_e + 1.$$

Besides, the number of interior points for all elements is equal to

$$N_p = N_e (N_k - 1).$$

$$\begin{aligned} \frac{d}{dx} &= \frac{d}{dt} \cdot \frac{dt}{dx} = \frac{1}{h_e} \frac{d}{dt}; \\ \frac{d^p}{dx^p} &= \frac{1}{h_e^p} \frac{d^p}{dt^p}; \end{aligned} \quad (1.6)$$

$$dx = h_e \cdot dt. \quad (1.7)$$

We can represent displacement (deflection) of beam $y(x)$ in the form

$$y(x) = w(t) = \sum_{k=0}^N \alpha_k \varphi(t+k), \quad x_{1(i_e)} \leq x \leq x_{5(i_e)}, \quad (1.8)$$

where $\varphi(s)$ is Daubechies scaling function, $[0, N] \subseteq \text{supp}(\varphi)$.

We substitute (1.8) into (1.2), taking into account relations (1.5)-(1.7).

$$\begin{aligned} \Phi_{i_e}(y) &= \frac{1}{2} \int_{x_1(i_e)}^{x_5(i_e)} \left(EJ \left(\frac{d^2 y}{dx^2} \right)^2 + \beta y^2 \right) dx - \\ &- \int_{x_1(i_e)}^{x_5(i_e)} q y dx = \frac{1}{2} \int_0^1 \left(\frac{EJ}{h_e^3} (w'')^2 + \beta h_e w^2 \right) dt - \\ &- \int_0^1 h_e q w dt = \frac{1}{2} \sum_{i=0}^N \sum_{j=0}^N \alpha_i \alpha_j \times \\ &\times \int_0^1 \left(\frac{EJ}{h_e^3} (\varphi''(t+i)\varphi''(t+j)) + \beta h_e (\varphi(t+i)\varphi(t+j)) \right) dt - \\ &- \sum_{i=0}^N \alpha_i \int_0^1 h_e q \varphi(t+i) dt = \\ &= \frac{1}{2} (K_{\alpha}^{i_e} \bar{\alpha}, \bar{\alpha}) - (\bar{R}_{\alpha}^{i_e}, \bar{\alpha}) = \Phi_{\alpha}(\bar{\alpha}) \end{aligned}$$

and finally

$$\Phi_{i_e}(y) = \Phi_{\alpha}(\bar{\alpha}) = \frac{1}{2} (K_{\alpha}^{i_e} \bar{\alpha}, \bar{\alpha}) - (\bar{R}_{\alpha}^{i_e}, \bar{\alpha}), \quad (1.9)$$

where

$$\begin{aligned} K_{\alpha}^{i_e}(i, j) &= \\ &= \int_0^1 \left(\frac{EJ}{h_e^3} (\varphi''(t+i)\varphi''(t+j)) + \beta h_e (\varphi(t+i)\varphi(t+j)) \right) dt; \end{aligned} \quad (1.10)$$

$$R_{\alpha}^{i_e}(i) = \int_0^1 (h_e q(t) \varphi(t+i)) dt. \quad (1.11)$$

We can define the parameters α_k through the nodal unknowns on the element:

$$\begin{cases} y_1 = w(0) = \sum_{k=0}^N \alpha_k \varphi(k) \\ \frac{dy_1}{dx} = \frac{1}{h_e} w'(0) = \frac{1}{h_e} \sum_{k=0}^N \alpha_k \varphi'(k) \\ y_2 = w(0.25) = \sum_{k=0}^N \alpha_k \varphi(k+0.25) \\ y_3 = w(0.5) = \sum_{k=0}^N \alpha_k \varphi(k+0.5) \\ y_4 = w(0.75) = \sum_{k=0}^N \alpha_k \varphi(k+0.75) \\ y_5 = w(1) = \sum_{k=0}^N \alpha_k \varphi(k+1) \\ \frac{dy_5}{dx} = \frac{1}{h_e} w'(1) = \frac{1}{h_e} \sum_{k=0}^N \alpha_k \varphi'(k+1). \end{cases} \quad (1.12)$$

Thus, we have

$$\bar{y}^{i_e} = T \bar{\alpha}, \quad (1.13)$$

where

$$\bar{y}^{i_e} = [y_1 \quad \frac{dy_1}{dx} \quad y_2 \quad y_3 \quad y_4 \quad y_5 \quad \frac{dy_5}{dx}]^T; \quad (1.14)$$

$$\bar{\alpha} = [\alpha_0 \quad \alpha_1 \quad \alpha_2 \quad \alpha_3 \quad \alpha_4 \quad \alpha_5 \quad \alpha_6]^T; \quad (1.15)$$

$$D = \text{diag}(1 \quad 1/h_e \quad 1 \quad 1 \quad 1 \quad 1 \quad 1/h_e); \quad (1.16)$$

T is matrix, which is defined in accordance with the following formula:

$$T = D \begin{bmatrix} \varphi(0) & \varphi(1) & \varphi(2) & \varphi(3) & \varphi(4) & \varphi(5) & \varphi(6) \\ \varphi'(0) & \varphi'(1) & \varphi'(2) & \varphi'(3) & \varphi'(4) & \varphi'(5) & \varphi'(6) \\ \varphi(0.25) & \varphi(1.25) & \varphi(2.25) & \varphi(3.25) & \varphi(4.25) & \varphi(5.25) & \varphi(6.25) \\ \varphi(0.5) & \varphi(1.5) & \varphi(2.5) & \varphi(3.5) & \varphi(4.5) & \varphi(5.5) & \varphi(6.5) \\ \varphi(0.75) & \varphi(1.75) & \varphi(2.75) & \varphi(3.75) & \varphi(4.75) & \varphi(5.75) & \varphi(6.75) \\ \varphi(1) & \varphi(2) & \varphi(3) & \varphi(4) & \varphi(5) & \varphi(6) & \varphi(7) \\ \varphi'(1) & \varphi'(2) & \varphi'(3) & \varphi'(4) & \varphi'(5) & \varphi'(6) & \varphi'(7) \end{bmatrix}; \quad (1.17)$$

Then we have

$$\bar{\alpha} = T^{-1} \bar{y}^{i_e}. \quad (1.18)$$

Taking into account (1.9) and (1.18) we get

$$\begin{aligned} \Phi_{\alpha}(\bar{\alpha}) &= \frac{1}{2} (K_{\alpha}^{i_e} T^{-1} \bar{y}^{i_e}, T^{-1} \bar{y}^{i_e}) - (\bar{R}_{\alpha}^{i_e}, T^{-1} \bar{y}^{i_e}) = \\ &= \frac{1}{2} ((T^{-1})^T K_{\alpha}^{i_e} T^{-1} \bar{y}^{i_e}, \bar{y}^{i_e}) - ((T^{-1})^T \bar{R}_{\alpha}^{i_e}, \bar{y}^{i_e}) = \\ &= \frac{1}{2} (K^{i_e} \bar{y}^{i_e}, \bar{y}^{i_e}) - (\bar{R}^{i_e}, \bar{y}^{i_e}) = \Phi_{i_e}(\bar{y}^{i_e}) \end{aligned}$$

and finally

$$\begin{aligned} \Phi_{\alpha}(\bar{\alpha}) &= \Phi_{i_e}(\bar{y}^{i_e}) = \\ &= \frac{1}{2} (K^{i_e} \bar{y}^{i_e}, \bar{y}^{i_e}) - (\bar{R}^{i_e}, \bar{y}^{i_e}), \end{aligned} \quad (1.19)$$

where K^{i_e} is local stiffness matrix; \bar{R}^{i_e} is local load vector;

$$K^{i_e} = (T^{-1})^T K_{\alpha}^{i_e} T^{-1}; \quad \bar{R}^{i_e} = (T^{-1})^T \bar{R}_{\alpha}^{i_e}. \quad (1.20)$$

1.3. Numerical implementation and sample of static beam analysis.

The presented algorithm can be implemented using the tools of MATLAB. In particular, the reference to the standard function

`wavefun('db10',0)`

allows researcher to get the values of the scaling Daubeshi function φ on the interval $[0, 19] = \text{supp}(\varphi)$ with steps $h_t = 1/256 = 2^{-8}$. Let us denote $N_t = 256 = 2^8$. For the consider-

ing value $N = 7$ we can use the first $N_t = N_t \cdot N + 1$ values of φ , defined on the segment $[0, N] = [0, 7]$. With such a small step, it will be natural to compute the derivatives in the form of finite differences:

$$\varphi'(t_k) \approx d\varphi_k = \frac{\varphi_{k+1} - \varphi_{k-1}}{2h_t}, \quad k = 1, 2, \dots, N_t; \quad (1.21)$$

$$\varphi''(t_k) \approx d^2\varphi_k = \frac{\varphi_{k+1} - 2\varphi_k + \varphi_{k-1}}{h_t^2}, \quad k = 1, 2, \dots, N_t, \quad (1.22)$$

$$\text{where} \quad \varphi_k = \varphi(t_k); \quad t_k = k \cdot h_t. \quad (1.23)$$

If $t_k \notin [0, 19]$ then $\varphi_k = \varphi(t_k) = 0$.

When computing the coefficients of the local stiffness matrix (formulas (10) and (20)), one can use the simplest quadrature formulas for numerical integration, in particular, midpoint quadrature rule with step $2h_t$.

Let us consider (as a model sample) analysis of beam on an elastic foundation with the following parameters: $q(x) = P\delta(x - L/2)$, $P = 100$ kN is the load specified at the midpoint (Figure 6); $L = 4$ m; $h_b = 1.3$ m; $b_b = 1$ m; $E = 2560 \cdot 10^4$ kN/m²; $k = 75 \cdot 10^3$ kN/m³.

In this case, we can consider the following boundary conditions:

$$\begin{cases} y(0) = y''(0) = 0 \\ y(L) = y''(L) = 0. \end{cases} \quad (1.24)$$

Thus, we consider beam hinged on both sides (simply supported beam).

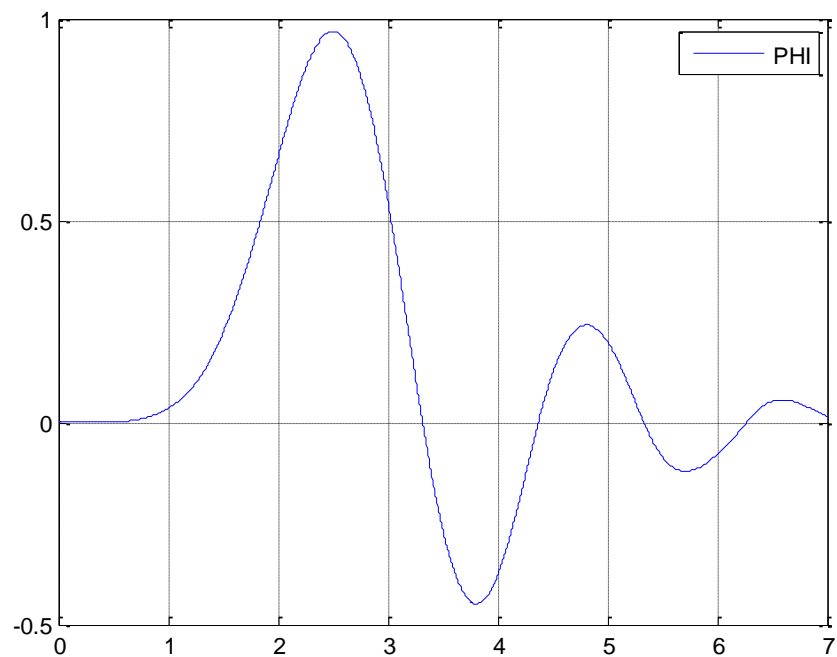


Figure 1.3. Daubechies scaling function.

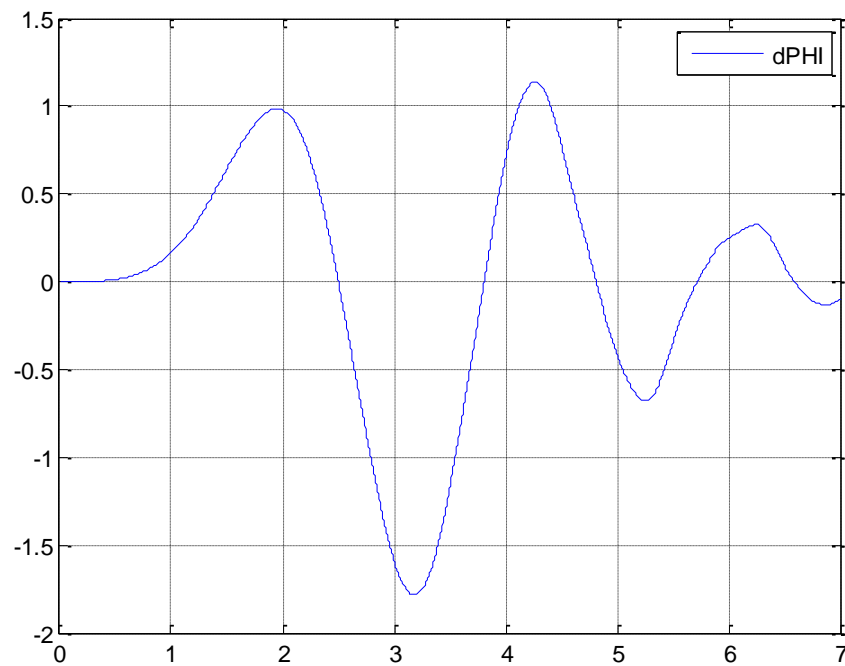


Figure 1.4. The first-order difference derivative of Daubechies scaling function.

Let $N_e = 8$ be a number of elements. Then the total number of unknowns is equal to

$$N_g = N_p + 2N_b = 3 \cdot 8 + 2 \cdot (8 + 1) = 42 .$$

The length of the element is defined by formula

$$h_e = L / N_e = 4 / 8 = 0.5 .$$

Distance between coordinates of nodes (step) is equal to

$$h_p = h_e / 4 = 1 / 8 = 0.125 .$$

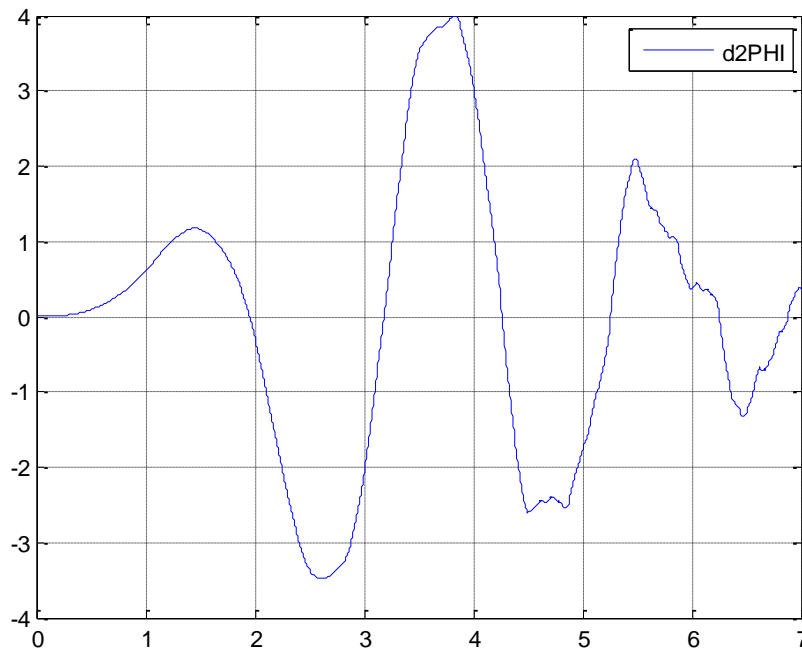


Figure 1.5. The second-order difference derivative of Daubechies scaling function.

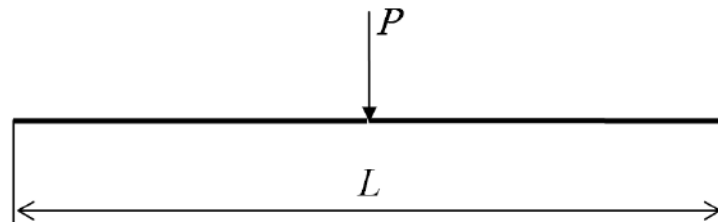


Figure 1.6. Considering beam.

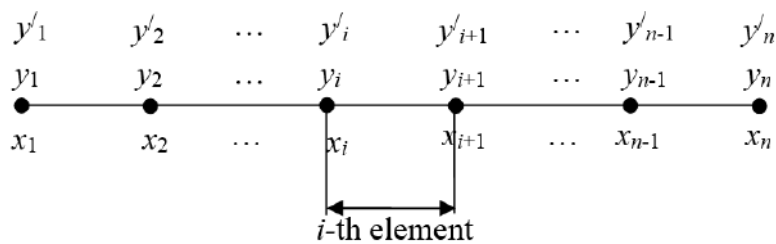


Figure 1.7. Finite element discretization of beam (based on cubic parabola).

As is known, for comparison, we can use the conventional finite element method, where the unknown function of the deflection on the element is represented as a cubic parabola. In this case, the finite element discretization is shown in Figure 7.

Adequate beam approximation requires 32 elements. In this case, the total number of unknowns is equal to

$$N_g = 2 \cdot (32 + 1) = 66 .$$

Graphical comparison of results of analysis is shown in Figure 8. The following notation is used: y_{db} is the result obtained using Daubechies scaling function; y_{fem} is the result obtained on the basis of a cubic parabola.

As is obvious, the results obtained are almost the same. However, the wavelet-based algorithm of the finite element method based on the Daubechies scaling function leads to a decrease in the number of unknowns.

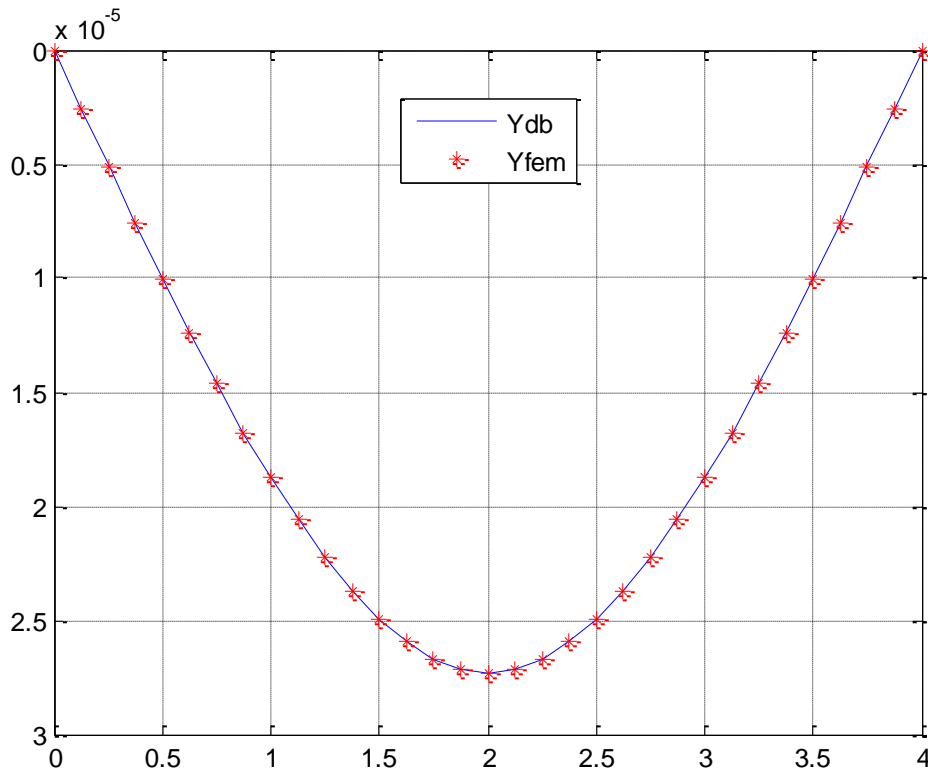


Figure 1.8. Comparison of results of analysis.

2. WAVELET-BASED SEMIANALYTICAL BEAM ANALYSIS WITH THE USE OF DAUBECHIES SCALING FUNCTIONS

2.1. Mathematical (continual) formulation of the problem of dynamic beam analysis.

Let us consider the problem of dynamic beam analysis (Figure 2.1). Corresponding impulse load is applied in the middle of the beam. Mathematical formulation of the problem has the form:

$$\left\{ \begin{array}{l} \frac{\partial^2 y}{\partial t^2} = -\beta_0 \frac{\partial^4 y}{\partial x^4} + F(x, t), \\ 0 < x < \ell, \quad t > 0, \\ \left. \begin{array}{l} y(0, t) = y(\ell, t) = 0 \\ y''(0, t) = y''(\ell, t) = 0 \end{array} \right\}, \quad t \geq 0 \\ \left. \begin{array}{l} y(x, 0) = y_0(x) = 0 \\ \frac{\partial y}{\partial t}(x, 0) = y'_t(x) = 0 \end{array} \right\}, \quad 0 \leq x \leq \ell, \end{array} \right. \quad (2.1)$$

where $y(x, t)$ is the deflection of a beam at a point x at a time t ; x is the coordinate along the length of the beam, $0 \leq x \leq \ell$; t is time coordinate, $t \geq 0$; $\beta_0 = EJ / \rho$; EJ is bending stiffness of beam; ρ is density of the beam material; $F(x, t) = P \cdot \delta(x - \ell/2) \delta(t)$ is function simulating the transverse impact of the impact on the beam at a point; $\delta(x - \ell/2)$ and $\delta(t)$ are Dirac delta functions.

2.2. Wavelet-based discrete-continual approximation of the problem of dynamic beam analysis.

Discere-continual finite element method (discrete-analytical approach) is used for solution of the considering problem. Within this method we use finite element approximation along the x axis, and a continual problem is considered along the time axis t .

Let us divide domain (one-dimensional interval $(0, l)$), occupied by the beam into N_e parts (finite elements);

$$h_e = l / N_e$$

is the length of the element.

Each element is also divided into N_k parts, for example, $N_k = 4$.

Once again we can use the following notation: i_e is element number; $x_1(i_e)$ is coordinate of the starting point of the i_e -th element; $x_5(i_e)$ is coordinate of the end point of the i_e -th element. At the boundary points (nodes), we can choose unknowns y_i and y'_i ; at the inner points we can choose unknowns y_i , $i = 2, 3, 4$. Thus, the total number of unknowns on an element is equal to

$$N = N_k - 1 + 2 \cdot 2 = N_k + 3 = 7.$$

The number of boundary points for all elements, the number of interior points for all elements and the total number of unknowns are equal to

$$\begin{aligned} N_b &= N_e + 1; \quad N_p = N_e(N_k - 1); \\ N_g &= N_p + 2N_b. \end{aligned}$$

We can also introduce the local coordinates

$$t = \frac{x - x_{1(i_e)}}{h_e}, \quad x_{1(i_e)} \leq x \leq x_{5(i_e)} \quad (2.2)$$

with corresponding relations

$$\begin{cases} x = x_{1(i_e)} \Rightarrow t = 0 \\ x = x_2 \Rightarrow t = 0.25 \\ x = x_3 \Rightarrow t = 0.5 \\ x = x_4 \Rightarrow t = 0.75 \\ x = x_{5(i_e)} \Rightarrow t = 1; \end{cases} \quad (2.3)$$

$$\frac{d}{dx} = \frac{d}{dt} \cdot \frac{dt}{dx} = \frac{1}{h_e} \frac{d}{dt}; \quad (2.4)$$

$$\begin{aligned} \frac{d^p}{dx^p} &= \frac{1}{h_e^p} \frac{d^p}{dt^p}; \\ dx &= h_e \cdot dt. \end{aligned} \quad (2.5)$$

We can represent displacement (deflection) of beam $y(x, t)$ for a given t in the form

$$y(x, \cdot) = w(q) = \sum_{k=0}^{N-1} \alpha_k \varphi(q+k), \quad x_{1(i_e)} \leq x \leq x_{5(i_e)}, \quad (2.6)$$

where $\varphi(s)$ is Daubechies scaling function, $[0, N] \subseteq \text{supp}(\varphi)$.

We substitute (2.6) into the quadratic part of the corresponding energy functional, taking into account relations (2.3)-(2.5). Then we have

$$\begin{aligned} \int_{x_1(i_e)}^{x_5(i_e)} \left(\frac{d^2 y}{dx^2} \right)^2 dx &= \frac{1}{h_e^3} \int_0^1 (w'')^2 dq = \\ &= \sum_{i=0}^{N-1} \sum_{j=0}^{N-1} \frac{1}{h_e^3} \alpha_i \alpha_j \int_0^1 (\varphi''(q+i) \varphi''(q+j)) dq = \\ &= (K_{\alpha}^{i_e} \bar{\alpha}, \bar{\alpha}) \end{aligned} \quad (2.7)$$

We can define the parameters α_k through the corresponding nodal unknowns on the element $y_i = y_i(t) = y(x_i, t)$:

$$\begin{cases} y_1 = w(0) = \sum_{k=0}^N \alpha_k \varphi(k) \\ \frac{dy_1}{dx} = \frac{1}{h_e} w'(0) = \frac{1}{h_e} \sum_{k=0}^N \alpha_k \varphi'(k) \\ y_2 = w(0.25) = \sum_{k=0}^N \alpha_k \varphi(k+0.25) \\ y_3 = w(0.5) = \sum_{k=0}^N \alpha_k \varphi(k+0.5) \\ y_4 = w(0.75) = \sum_{k=0}^N \alpha_k \varphi(k+0.75) \\ y_5 = w(1) = \sum_{k=0}^N \alpha_k \varphi(k+1) \\ \frac{dy_5}{dx} = \frac{1}{h_e} w'(1) = \frac{1}{h_e} \sum_{k=0}^N \alpha_k \varphi'(k+1). \end{cases} \quad (2.8)$$

Thus, we have

$$\bar{y}^{i_e} = T \bar{\alpha}, \quad (2.9)$$

$$T = D \begin{bmatrix} \varphi(0) & \varphi(1) & \varphi(2) & \varphi(3) & \varphi(4) & \varphi(5) & \varphi(6) \\ \varphi'(0) & \varphi'(1) & \varphi'(2) & \varphi'(3) & \varphi'(4) & \varphi'(5) & \varphi'(6) \\ \varphi(0.25) & \varphi(1.25) & \varphi(2.25) & \varphi(3.25) & \varphi(4.25) & \varphi(5.25) & \varphi(6.25) \\ \varphi(0.5) & \varphi(1.5) & \varphi(2.5) & \varphi(3.5) & \varphi(4.5) & \varphi(5.5) & \varphi(6.5) \\ \varphi(0.75) & \varphi(1.75) & \varphi(2.75) & \varphi(3.75) & \varphi(4.75) & \varphi(5.75) & \varphi(6.75) \\ \varphi(1) & \varphi(2) & \varphi(3) & \varphi(4) & \varphi(5) & \varphi(6) & \varphi(7) \\ \varphi'(1) & \varphi'(2) & \varphi'(3) & \varphi'(4) & \varphi'(5) & \varphi'(6) & \varphi'(7) \end{bmatrix}; \quad (2.10)$$

$$\bar{y}^{i_e} = [y_1 \frac{dy_1}{dx} y_2 y_3 y_4 y_5 \frac{dy_5}{dx}]^T; \quad (2.11)$$

$$\bar{\alpha} = [\alpha_0 \alpha_1 \alpha_2 \alpha_3 \alpha_4 \alpha_5 \alpha_6]^T; \quad (2.12)$$

$$D = \text{diag}(1 \quad 1/h_e \quad 1 \quad 1 \quad 1 \quad 1 \quad 1/h_e). \quad (2.13)$$

Then we have

$$\bar{\alpha} = T^{-1} \bar{y}^{i_e}. \quad (2.14)$$

Substituting (2.14) into (2.9), we get

$$(K_\alpha^{i_e} T^{-1} \bar{y}^{i_e}, T^{-1} \bar{y}^{i_e}) = (K^{i_e} \bar{y}^{i_e}, \bar{y}^{i_e}), \quad (2.15)$$

$$\text{where} \quad K^{i_e} = (T^{-1})^T K_\alpha^{i_e} T^{-1} \quad (2.16)$$

is local stiffness matrix.

We can use the simplest quadrature formulas of numerical integration for computing of coefficients of the local stiffness matrix.

Let us denote

$$\bar{y}(t) = [y_1(t) \quad y_2(t) \quad \dots \quad y_{N_g}(t)]^T. \quad (2.17)$$

We can obtain the resultant system of finite element equations in the matrix form

$$\begin{cases} \bar{y}''(t) = -A\bar{y} + \bar{F} \\ \bar{y}(0) = \bar{y}_0 \\ \bar{y}'(0) = \bar{y}'_0 \end{cases}, \quad (2.18)$$

where A is global stiffness matrix.

The matrix A is positive definite. The general solution of the problem (2.18) has the form:

In accordance with formulation of the considering problem we have

$$F(x, t) = P \cdot \delta(x - \ell/2) \delta(t) \quad (2.20)$$

and consequently

$$\bar{F}(t) = \delta(t) \cdot \bar{F}_0; \quad (2.21)$$

$$\bar{F}_0(i) = P \cdot \begin{cases} 1, & i = (N_g + 1)/2 \\ 0, & i \neq (N_g + 1)/2. \end{cases} \quad (2.22)$$

Substituting (2.22) into (2.19) and taking into account the initial conditions, we obtain the final form of the solution of the problem:

$$\bar{y}(t) = \sqrt{A^{-1}} \sin(\sqrt{A} t) \bar{F}_0. \quad (2.23)$$

ACKNOWLEDGMENTS

The distinctive research work was carried out at the expense of the State program of the Russian Federation “Scientific and technological development of the Russian Federation”, State program of the Russian Federation “Development of science and technology” for 2013-2020 and the Program for Fundamental Research of State Academies of Science for 2013–2020, as part of the Plan for Fundamental Scientific Research of the Ministry of Construction and Housing and Communal Services of the Russian Federation

and the Russian Academy of Architecture and Construction Sciences for 2018, within science topic 7.4.2 “Development and numerical implementation of methods for determining the stress-strain state of spatial slab-shell reinforced concrete structures, taking into account physical non-linearity, cracking and acquired anisotropy” and science topic 7.4.17 “Research and development of adaptive mathematical models, numerical and numerical-analytical methods as the basis and component of monitoring systems of bearing structures of unique buildings and constructions”.

REFERENCES

1. **Daubechies I.** Orthonormal bases of compactly supported wavelets. // *Commun. Pure Appl. Math.*, 1988, vol. 41, pp. 909-996.
2. **Akimov P.A., Aslami M.** About Verification of Correct Wavelet-Based Approach to Local Static Analysis of Bernoulli Beam. // *Applied Mechanics and Materials*, 2014, Vols. 580-583, pp. 3013-3016.
3. **Akimov P.A., Aslami M.** Theoretical Foundations of Correct Wavelet-Based Approach to Local Static Analysis of Bernoulli Beam. // *Applied Mechanics and Materials*, 2014, Vols. 580-583, pp. 2924-2927.
4. **Akimov P.A., Belostotsky A.M., Kaytukov T.B., Mozgaleva M.L., Aslami M.** About several numerical and semianalytical methods of local structural analysis. // *International Journal for Computational Civil and Structural Engineering*, 2018, Vol. 14, Issue 4, pp. 59-69.
5. **Akimov P.A., Mozgaleva M.L.** Correct Wavelet-based Multilevel Numerical Method of Local Solution of Boundary Problems of Structural Analysis. // *Applied Mechanics and Materials*, 2012, Vols. 166-169, pp. 3155-3158.
6. **Aslami M., Akimov P.A.** Wavelet-based finite element method for multilevel local plate analysis. // *Thin-Walled Structures*, 2015-2016, Vol. 98, Part B, pp. 392-402.
7. **Akimov P.A., Belostotsky A.M., Mozgaleva M.L., Aslami M., Negrozov O.A.** Correct Multilevel Discrete-Continual Finite Element Method of Structural Analysis. // *Advanced Materials Research*, 2014, Vol. 1040, pp. 664-669.
8. **Akimov P.A., Belostotsky A.M., Sidorov V.N., Mozgaleva M.L., Negrozov O.A.** Application of discrete-continual finite element method for global and local analysis of multilevel systems. // *Applied Mechanics and Materials; AIP Conference Proceedings*, 2014, Vol. 1623(3), pp. 3-6.
9. **Akimov P.A., Mozgaleva M.L.** Correct Wavelet-based Multilevel Discrete-Continual Methods for Local Solution of Boundary Problems of Structural Analysis. // *Applied Mechanics and Materials*, 2013, Vols. 353-356, pp. 3224-3227.
10. **Akimov P.A., Mozgaleva M.L.** Wavelet-based Multilevel Discrete-Continual Finite Element Method for Local Deep Beam Analysis. // *Applied Mechanics and Materials*, 2013, Vols. 405-408, pp. 3165-3168.
11. **Akimov P.A., Mozgaleva M.L.** Wavelet-based Multilevel Discrete-Continual Finite Element Method for Local Plate Analysis. // *Applied Mechanics and Materials*, 2013, Vols. 351-352, pp. 13-16.
12. **Akimov P.A., Mozgaleva M.L., Aslami M., Negrozov O.A.** Modified Wavelet-based Multilevel Discrete-Continual Finite Element. Part 1: Continual and Discrete-Continual Formulations of the Problems Method for Local Structural Analysis. // *Applied Mechanics and Materials*, 2014, Vols. 670-671, pp. 720-723.
13. **Akimov P.A., Mozgaleva M.L., Aslami M., Negrozov O.A.** Modified Wavelet-based Multilevel Discrete-Continual Finite Element. Part 2: Reduced Formulations of the Problems in Haar Basis Method for Local Structural Analysis. // *Applied Mechanics and Materials*, 2014, Vols. 670-671, pp. 724-727.
14. **Mozgaleva M.L., Akimov P.A.** About Verification of Wavelet-Based Discrete-

- Continual Finite Element Method for Three-Dimensional Problems. Part 1: Structures with Constant Physical and Geometrical of Structural Analysis Parameters Along Basic Direction. // *Applied Mechanics & Materials*, 2015, Vol. 709, pp. 105-108.
15. **Mozgaleva M.L., Akimov P.A.** About Verification of Wavelet-Based Discrete-Continual Finite Element Method for Three-Dimensional Problems. Part 2: Structures with Piecewise Constant Physical and Geometrical Parameters Along Basic Direction of Structural Analysis. // *Applied Mechanics & Materials*, 2015, Vol. 709, pp. 109-112.
 16. **Mozgaleva M.L., Akimov P.A., Kaytukov T.B.** About wavelet-based multigrid numerical method of structural analysis with the use of discrete Haar basis. // *International Journal for Computational Civil and Structural Engineering*, 2018, Vol. 14, Issue 3, pp. 83-102.
 17. **Li B., Chen X.** Wavelet-based numerical analysis: A review and classification. // *Finite Elements in Analysis and Design*, 2014, vol. 81, pp. 14-31.
 18. **Ko J., Kurdila A.J., Pilant M.S.** A class of finite element methods based on orthonormal, compactly supported wavelets. // *Comput. Mech.*, 1995, Vol. 16, pp. 235-244.
 19. **Patton R.D., Marks P.C.** One-dimensional finite elements based on the Daubechies family of wavelets. // *AIAAJ*, 1996, Vol. 34, pp. 1696-1698.
 20. **Ma J.X., Xue J.J.** A study of the construction and application of a Daubechies wavelet-based beam element. // *Finite Elem. Anal. Des.*, 2003, vol. 39, pp. 965-975.
 21. **Chen X.F., Yang S.J., Ma J.X.** The construction of wavelet finite element and its application. // *Finite Elem. Anal. Des.*, 2004, vol. 40, pp. 541-554.
 22. **Li B., Cao H.R., He Z.J.** The construction of one-dimensional Daubechies wavelet-based finite elements for structural response analysis. // *J. Vibroeng*, 2011, vol. 13, pp. 729-738.
 23. **Jin J.M., Xue P.X., Xu Y.X., Zhu Y.L.** Compactly supported non-tensor product form two-dimension wavelet finite element. // *Appl. Math. Mech.*, 2006, Vol. 27, pp. 1673-1686.
 24. **Zhou Y.H., Zhou J.** A modified wavelet approximation of deflections for solving PDEs of beams and square thin plates. // *Finite Elements in Analysis and Design*, 2008, vol. 44, pp. 773-783.
 25. **Mitra M., Gopalakrishnan S.** Extraction of wave characteristics from wavelet-based spectral finite element formulation. // *Mech. Syst. Signal Process*, 2006, vol. 20, pp. 2046-2079.
 26. **Mitra M., Gopalakrishnan S.** Wavelet Spectral element for wave propagation studies in pressure loaded axisymmetric cylinders. // *J. Mech. Mater. Struct.*, 2007, vol. 4, pp. 753-772.
 27. **Mitra M., Gopalakrishnan S.** Wave propagation analysis in anisotropic plate using wavelet spectral element approach. // *J. Appl. Mech.*, 2008, vol. 75, pp. 1-6.
 28. **Mitra M., Gopalakrishnan S.** Wavelet-based spectral finite element modelling and detection of delamination in composite beams. // *Proceed. R. Soc. A*, 2006, vol. 462, pp. 1721-1740.
 29. **Aslami M., Akimov P.A.** Analytical solution for beams with multipoint boundary conditions on two-parameter elastic foundations. // *Archives of Civil and Mechanical Engineering*, 2016, Vol. 16, Issue 4, pp. 668-677.

СПИСОК ЛИТЕРАТУРЫ

1. **Daubechies I.** Orthonormal bases of compactly supported wavelets. // *Commun. Pure Appl. Math.*, 1988, vol. 41, pp. 909-996.
2. **Akimov P.A., Aslami M.** About Verification of Correct Wavelet-Based Approach to

- Local Static Analysis of Bernoulli Beam. // *Applied Mechanics and Materials*, 2014, Vols. 580-583, pp. 3013-3016.
3. **Akimov P.A., Aslami M.** Theoretical Foundations of Correct Wavelet-Based Approach to Local Static Analysis of Bernoulli Beam. // *Applied Mechanics and Materials*, 2014, Vols. 580-583, pp. 2924-2927.
4. **Akimov P.A., Belostotsky A.M., Kaytukov T.B., Mozgaleva M.L., Aslami M.** About several numerical and semianalytical methods of local structural analysis. // *International Journal for Computational Civil and Structural Engineering*, 2018, Vol. 14, Issue 4, pp. 59-69.
5. **Akimov P.A., Mozgaleva M.L.** Correct Wavelet-based Multilevel Numerical Method of Local Solution of Boundary Problems of Structural Analysis. // *Applied Mechanics and Materials*, 2012, Vols. 166-169, pp. 3155-3158.
6. **Aslami M., Akimov P.A.** Wavelet-based finite element method for multilevel local plate analysis. // *Thin-Walled Structures*, 2015-2016, Vol. 98, Part B, pp. 392-402.
7. **Akimov P.A., Belostotsky A.M., Mozgaleva M.L., Aslami M., Negrozov O.A.** Correct Multilevel Discrete-Continual Finite Element Method of Structural Analysis. // *Advanced Materials Research*, 2014, Vol. 1040, pp. 664-669.
8. **Akimov P.A., Belostotsky A.M., Sidorov V.N., Mozgaleva M.L., Negrozov O.A.** Application of discrete-continual finite element method for global and local analysis of multilevel systems. // *Applied Mechanics and Materials; AIP Conference Proceedings*, 2014, Vol. 1623(3), pp. 3-6.
9. **Akimov P.A., Mozgaleva M.L.** Correct Wavelet-based Multilevel Discrete-Continual Methods for Local Solution of Boundary Problems of Structural Analysis. // *Applied Mechanics and Materials*, 2013, Vols. 353-356, pp. 3224-3227.
10. **Akimov P.A., Mozgaleva M.L.** Wavelet-based Multilevel Discrete-Continual Finite Element Method for Local Deep Beam Analysis. // *Applied Mechanics and Materials*, 2013, Vols. 405-408, pp. 3165-3168.
11. **Akimov P.A., Mozgaleva M.L.** Wavelet-based Multilevel Discrete-Continual Finite Element Method for Local Plate Analysis. // *Applied Mechanics and Materials*, 2013, Vols. 351-352, pp. 13-16.
12. **Akimov P.A., Mozgaleva M.L., Aslami M., Negrozov O.A.** Modified Wavelet-based Multilevel Discrete-Continual Finite Element. Part 1: Continual and Discrete-Continual Formulations of the Problems Method for Local Structural Analysis. // *Applied Mechanics and Materials*, 2014, Vols. 670-671, pp. 720-723.
13. **Akimov P.A., Mozgaleva M.L., Aslami M., Negrozov O.A.** Modified Wavelet-based Multilevel Discrete-Continual Finite Element. Part 2: Reduced Formulations of the Problems in Haar Basis Method for Local Structural Analysis. // *Applied Mechanics and Materials*, 2014, Vols. 670-671, pp. 724-727.
14. **Mozgaleva M.L., Akimov P.A.** About Verification of Wavelet-Based Discrete-Continual Finite Element Method for Three-Dimensional Problems. Part 1: Structures with Constant Physical and Geometrical of Structural Analysis Parameters Along Basic Direction. // *Applied Mechanics & Materials*, 2015, Vol. 709, pp. 105-108.
15. **Mozgaleva M.L., Akimov P.A.** About Verification of Wavelet-Based Discrete-Continual Finite Element Method for Three-Dimensional Problems. Part 2: Structures with Piecewise Constant Physical and Geometrical Parameters Along Basic Direction of Structural Analysis. // *Applied Mechanics & Materials*, 2015, Vol. 709, pp. 109-112.
16. **Mozgaleva M.L., Akimov P.A., Kaytukov T.B.** About wavelet-based multigrid numerical method of structural analysis with the use of discrete Haar basis. // *International Journal for Computational Civil and Structural Engineering*

- tural Engineering*, 2018, Vol. 14, Issue 3, pp. 83-102.
17. **Li B., Chen X.** Wavelet-based numerical analysis: A review and classification. // *Finite Elements in Analysis and Design*, 2014, vol. 81, pp. 14-31.
18. **Ko J., Kurdila A.J., Pilant M.S.** A class of finite element methods based on orthonormal, compactly supported wavelets. // *Comput. Mech.*, 1995, Vol. 16, pp. 235-244.
19. **Patton R.D., Marks P.C.** One-dimensional finite elements based on the Daubechies family of wavelets. // *AIAAJ*, 1996, Vol. 34, pp. 1696-1698.
20. **Ma J.X., Xue J.J.** A study of the construction and application of a Daubechies wavelet-based beam element. // *Finite Elements in Analysis and Design*, 2003, vol. 39, pp. 965-975.
21. **Chen X.F., Yang S.J., Ma J.X.** The construction of wavelet finite element and its application. // *Finite Elements in Analysis and Design*, 2004, vol. 40, pp. 541-554.
22. **Li B., Cao H.R., He Z.J.** The construction of one-dimensional Daubechies wavelet-based finite elements for structural response analysis. // *J. Vibroeng*, 2011, vol. 13, pp. 729-738.
23. **Jin J.M., Xue P.X., Xu Y.X., Zhu Y.L.** Compactly supported non-tensor product form two-dimension wavelet finite element. // *Appl. Math. Mech.*, 2006, Vol. 27, pp. 1673-1686.
24. **Zhou Y.H., Zhou J.** A modified wavelet approximation of deflections for solving PDEs of beams and square thin plates. // *Finite Elements in Analysis and Design*, 2008, vol. 44, pp. 773-783.
25. **Mitra M., Gopalakrishnan S.** Extraction of wave characteristics from wavelet-based spectral finite element formulation. // *Mech. Syst. Signal Process*, 2006, vol. 20, pp. 2046-2079.
26. **Mitra M., Gopalakrishnan S.** Wavelet Spectral element for wave propagation studies in pressure loaded axisymmetric cylinders. // *J. Mech. Mater. Struct.*, 2007, vol. 4, pp. 753-772.
27. **Mitra M., Gopalakrishnan S.** Wave propagation analysis in anisotropic plate using wavelet spectral element approach. // *J. Appl. Mech.*, 2008, vol. 75, pp. 1-6.
28. **Mitra M., Gopalakrishnan S.** Wavelet-based spectral finite element modelling and detection of delamination in composite beams. // *Proceed. R. Soc. A*, 2006, vol. 462, pp. 1721-1740.
29. **Aslami M., Akimov P.A.** Analytical solution for beams with multipoint boundary conditions on two-parameter elastic foundations. // *Archives of Civil and Mechanical Engineering*, 2016, Vol. 16, Issue 4, pp. 668-677.

Marina L. Mozgaleva, Dr.Sc., Professor, Department of Applied Mathematics, National Research Moscow State University of Civil Engineering, 26, Yaroslavskoe Shosse, Moscow, 129337, Russia;
phone/fax: +7(499) 183-59-94;
E-mail: marina.mozgaleva@gmail.com.

Pavel A. Akimov, Full Member of the Russian Academy of Architecture and Construction Sciences (RAACS), Professor, Dr.Sc.; Executive Scientific Secretary of Russian Academy of Architecture and Construction Sciences; Vice-Director for Science Activities, Scientific Research Center "StADyO"; Professor of Department of Architecture and Construction, Peoples' Friendship University of Russia; Professor of Department of Structural Mechanics, Tomsk State University of Architecture and Building; 24, Ul. Bolshaya Dmitrovka, 107031, Moscow, Russia;
phone +7(495) 625-71-63; fax: +7 (495) 650-27-31;
E-mail: akimov@raasn.ru, pavel.akimov@gmail.com.

Taymuraz B. Kaytukov, Advisor of the Russian Academy of Architecture and Construction Sciences, Associated Professor, Ph.D.; Deputy Executive Scientific Secretary of Russian Academy of Architecture and Construction Sciences; Central Institute for Research and Design of the Ministry of Construction and Housing and Communal Services of the Russian Federation; 24, Ul. Bolshaya Dmitrovka, 107031, Moscow, Russia;
phone +7(495) 625-81-53; fax: +7 (495) 650-27-31;
Email: kaytukov@raasn.ru, tkaytukov@gmail.com.

Мозгалева Марина Леонидовна, доцент, доктор технических наук, профессор кафедры прикладной математики, Национальный исследовательский Москов-

ский государственный строительный университет (НИУ МГСУ), Россия, 129337, Москва, Ярославское шоссе, д.26, тел./факс: +7(499) 183-59-94, E-mail: marina.mozgaleva@gmail.com.

Акимов Павел Алексеевич, академик Российской академии архитектуры и строительных наук (РААСН), профессор, доктор технических наук; главный ученый секретарь Российской академии архитектуры и строительных наук; заместитель генерального директора по науке ЗАО «Научно-исследовательский центр СтаДиО»; профессор Департамента архитектуры и строительства Российского университета дружбы народов; профессор кафедры строительной механики Томского государственного архитектурно-строительного университета; 107031, г. Москва, ул. Большая Дмитровка, д. 24, стр. 1; тел. +7(495) 625-71-63; факс +7 (495) 650-27-31; Email: akimov@raasn.ru, pavel.akimov@gmail.com.

Кайтуков Таймураз Батразович, советник РААСН, доцент, кандидат технических наук, заместитель главного ученого секретаря Российской академии архитектуры и строительных наук; Центральный научно-исследовательский и проектный институт Министрства строительства и жилищно-коммунального хозяйства Российской Федерации; 107031, г. Москва, ул. Большая Дмитровка, д. 24, стр. 1; тел. +7(495) 625-81-53; факс +7 (495) 650-27-31; E-mail: kaytukov@raasn.ru, tkaytukov@gmail.com.