

Enhancement of the Accuracy of photonic structure of photonic crystal fibre by using Artificial Neural Network

Er. Amandeep Kaur
M.tech ECE Deptt
eraman.kaur@gmail.com

Dr. Sandeep Singh Gill
ofessor ECE Deptt
ssg@gndec.ac.in

Prof. Baljeet Kaur
Asst Prof. ECE Deptt
baljeetkaur@gndec.ac.in

Abstract

There are several methods introduced to refining the accuracy of Photonic structures. No one has as yet studied the effect of Neural Networks in refining the accuracy of the photonic structure of the Photonic Crystal Fibers. In this paper we use The simulation that will be conducted using artificial neural networks to refining the accuracy of the photonic crystal fibers &.Artificial neural network will be further optimized by varying the number of layers to enhance the accuracy of the photonic structure of the photonic crystal fibers.

1. Introduction

Photonic-crystal fiber (PCF) is a new class of optical fiber based on the properties of photonic crystals. Because of its ability to confine light in hollow cores or with confinement characteristics not possible in conventional optical fiber, PCF is now finding applications in fiber-optic communications, fiber lasers, nonlinear devices, high-power transmission, highly sensitive gas sensors, and other areas.

Photonic Crystal Fiber (PCF) can provide characteristics that ordinary optical fiber do not exhibit, such as: single mode operation from the UV to IR with large mode-field diameters, highly nonlinear performance for super continuum generation, numerical aperture (NA) values ranging from very low to about 0.9, optimized dispersion properties, and air core guidance, among others. Applications for photonic crystal fibers include spectroscopy, metrology, biomedicine, imaging, telecommunication, industrial machining, and military, and the list keeps growing as the technology becomes a mainstream. Photonic crystal

fibers are generally divided into two main categories: Index Guiding fibers that have a solid core, and Photonic Bandgap or air guiding fibers that have periodic micro-structured elements and a core of low index material (e.g. hollow core).

Structured optical fibers are also called microstructured optical fibers and sometimes photonic crystal fiber in case the arrays of holes are periodic. PCF (Photonic Crystal Fiber) is a type of optical fiber using the properties of photonic crystals. Its advantages against a conventional optical fiber are possibility to control optical properties and confinement characteristics of material. The conventional optical fibers simple guide light and they have started revolution in telecommunication. The principle of total internal reflection has been used for guiding of light in the fiber. Nowadays, we almost have reached the maximum of its the best properties, which are limited by the optical properties of their solid cores (attenuation 0.2 dB/km, zero dispersion shifted to the minimum loss window at 1550 nm on used wavelength with fiber.

Low-loss dielectric periodic material with sufficiently different dielectric constants in crystals can control flow of the light. Crystals with photonic band gaps can be design We can design such structure which can prevent the light from propagation in certain directions with specified range of wavelengths. Hollow Core Photonic Crystal Fibers (HC-PCF) is also called holey fiber. It enables the guidance of the light in the hollow core with lower attenuation than in the solid silica core. The core can be filled by air or gas.

There are many advantages of using PCF against a conventional optical fiber. The biggest ones are possibility to control optical properties and confinement characteristics of material.Since these fibers allow for guidance through hollow fibers (air

holes).there is smaller attenuation than with fiber with solid core. PCFs with larger cores may carry more power than conventional fibers. Larger contrast available for effective-index guidance. Attenuation effects not worse than for conventional fibers. Control over dispersion: size of air holes may be tuned to shift of zero dispersion into visible range of the light.

2. Methodology

Matlab will be used as the simulation tool. Attempt will be made to Enhance the Accuracy of Photonic Structure of Photonic Crystal Fiber using Artificial Neural Networks. First The Parameters of the photonic structure will be considered. Neural networks have proved themselves as proficient classifiers and are particularly well suited for addressing non-linear problems. Given the non-linear nature of real world phenomena, like Enhancing the Accuracy of Photonic Structure of Photonic Crystal Fiber, neural networks is certainly a good candidate for solving the problem. The Parameters(as shown in TABLE I) will act as inputs to a neural network and the enhancement of accuracy of the photonic structure will be the target. Calculate the photonic band gaps for various input parameters by using plane wave method. Find the unit cells which are perpendicular to the xy plane then form the equation matrix of $2N$ by $2N$.for this case there have no TE & TM decoupling. Find the bandgap & save these values into its appreciate band. Then plotting the variation of bandgap between SiO_2 -air PBG. Similarly repeat all of this for three samples unless you get desired PBG (as shown in fig 1a,1b,1c,1d,1e).these figures show the photonic band gap variation in 2d triangular lattice of SiO_2 -air PBG.For figs 1(a,b,c,d,e) ϵ_{psa} is the dielectric constant of air, ϵ_{psb} is the dielectric constant of SiO_2 , a is the diameter & f is the spacing between holes.At last in the photonic band gap graphs if the region width $<.574$ then it guides the value else leaky the value.

Further Given an input, which constitutes the measured values for the parameters of the photonic structure, the neural network is expected to identify if the accuracy has been achieved or not. This is achieved by presenting previously recorded parameters to a neural network and then tuning it to produce the desired target outputs. This process is called neural network training. The samples will be divided into training, validation and test sets. The training set is used to teach the network. Training continues as long as the network continues improving on the validation set. The test set provides a completely independent measure of network accuracy. The trained neural network will be tested

with the testing samples. The network response will be compared against the desired target response to build the classification matrix which will provide a comprehensive picture of a system performance.

2.1. The training data

The training data set includes a number of cases, each containing values for a range of input and output variables. The first decisions you will need to make are: which variables to use, and how many (and which) cases to gather.

The choice of variables (at least initially) is guided by intuition. Expertise in the problem domain will give you some idea of which input variables are likely to be influential. As a first pass, you should include any variables that you could have an influence - part of the design process will be to reduce this set down.

Neural networks process numeric data in a fairly limited range. This presents a problem if data is in an unusual range, if there is missing data, or if data is non-numeric. Fortunately, there are methods to deal with each of these problems. Numeric data is scaled into an appropriate range for the network, and missing values can be substituted for using the mean value (or other statistic) of that variable across the other available training cases.

Table1
Input Parameters of Photonic Structure

Samples	Various Input Parameters			
	ϵ_{psa}	ϵ_{psb}	a	f
1	1	$1.42 + (\text{iter}/100)^2$	1.0	0.7
2	1	1.46^2	1.0	$0.7 - (\text{iter} * .01)$
3	1	1.46^2	$1.0 + (\text{iter} * .01)$	0.7

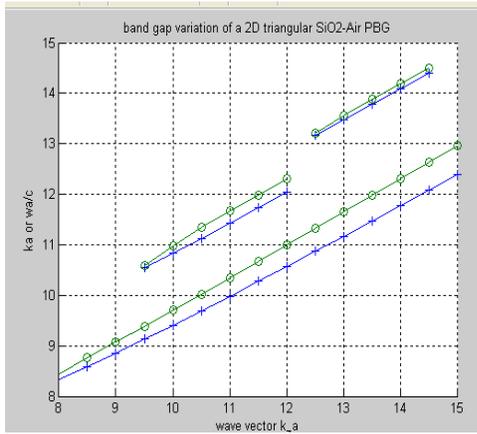


Fig1a

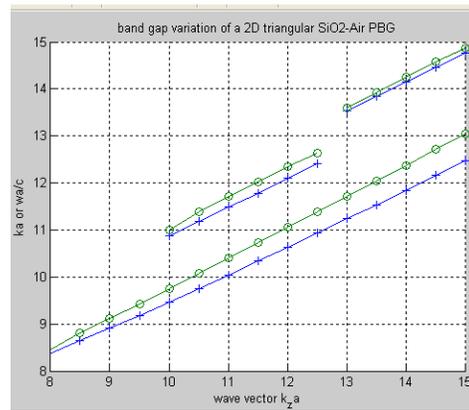


Fig1d

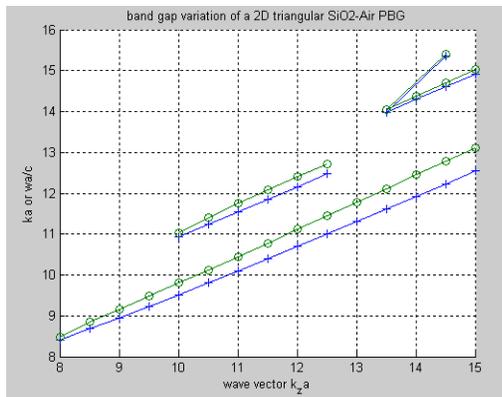


Fig1b

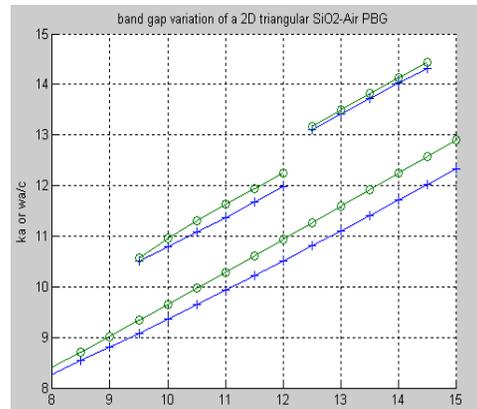


Fig1e

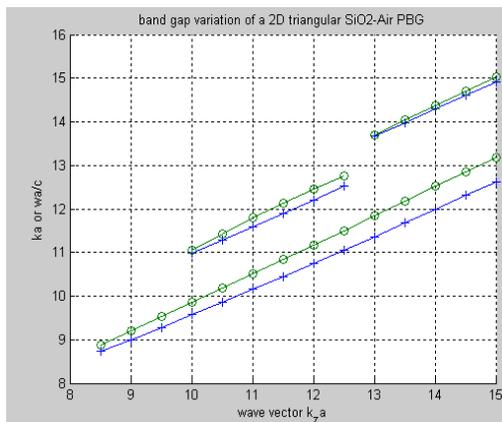


Fig1c

Fig 1(a,b,c,d,e) shows the photonic band gap variation for input parameter for sample 1

3 Result & Discussion

In this paper used unary encoding in this simulation to perform symbol translation. The first six columns of data will represent the Cloud characteristics. The 7th column represents whether the job is to be transferred or not. This data will be randomly generated. The next step will be to preprocess the data into a form that can be used with a neural network. The next step is to create a neural network that will learn to identify if the accuracy has been achieved or not.

The assumed samples will be automatically divided into training, validation and test sets. The training set will be used to teach the network. Training will continue long as the network continues improving on the validation set (as shown in fig 2). The test set will provide a completely independent measure of neural network accuracy to detect accuracy. The trained neural network will be tested with the testing samples. This will give a sense of how well the network will do when applied to data from the real world. The overall architecture of your neural network is store in the variable net. The simulation of network returned output in matrix or structure format. The performance evaluation involves Comparison between target and network's output in testing set. (generalisation ability). Comparison between target and network's output in training set. (memorisation ability). Design a function to measure the distance/similarity of the target and output. The result shows the graphical representation of percentage accuracy versus number of layers (shown in Fig 3). From this it is clear that number of two layers are sufficient to achieve the 100% accuracy .

4. Conclusion

Neural networks have proved themselves as proficient classifiers and are particularly well suited for addressing non-linear problems. Given the non-linear nature of real world phenomena, like Enhancing the Accuracy of Photonic Structure of Photonic Crystal Fiber, neural networks is certainly a good candidate for solving the problem. From the fig 3 it is clear that only number of two layers are sufficient to achieve the accuracy of 100%.

5. Acknowledgment

I should like to take this opportunity to express a deep sense of gratitude to prof. Sandeep Singh Gill for providing me valuable & consistent guidance, generous advices, academic support ,encouragement during the preparation of manuscript

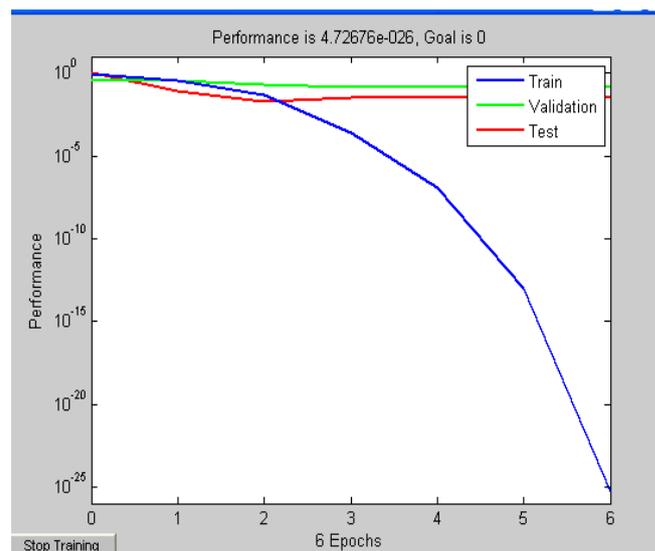


fig 2 shows the performance of neural network

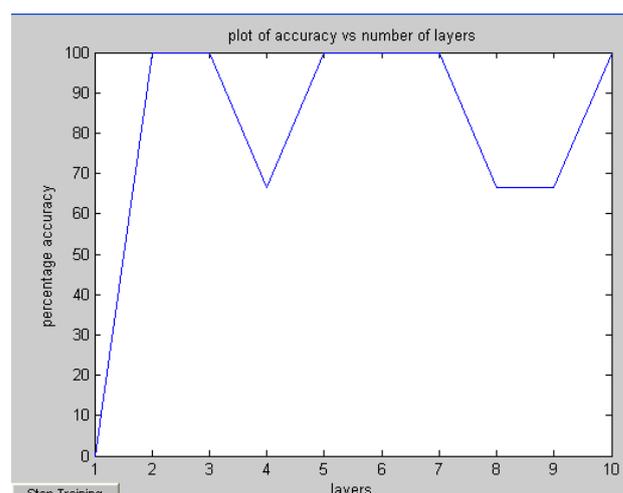


Fig.3 graph shows number of layers vs. percentage accuracy

The constant guidance & encouragement received from Assistant professor Baljeet Kaur has been of great help in carrying out the present work. Her peerless experiences & knowledge in this field were very helpful to me for this work.

6. References

- [1] Liu Ming-sheng; Yue Ying-juan; Li Yan; , "Birefringence property of asymmetric structure photonic crystal fiber," Communications and Photonics Conference and Exhibition (ACP), 2010 Asia , vol., no., pp.699-700, 8-12 Dec. 2010

- [2] Gowre, S.K.C.; Mahapatra, S.; Sahu, P.K.; Biswas, J.C.; , "Design and analysis of a modified Photonic Crystal Fiber structure," *Industrial and Information Systems*, 2007. ICIS 2007. International Conference on , vol., no., pp.159-162, 9-11 Aug. 2007
- [3] Rostami, A.; Ghanbari, A.; Soofi, H.; Janabi-Sharifi, F.; , "Enlarging effective mode area of photonic crystal fibers using defected core structures," *Optomechatronic Technologies (ISOT)*, 2010 International Symposium on , vol., no., pp.1-4, 25-27 Oct. 2010
- [4] Li Bing-xiang; Xie Ying-mao; , "The band gap structure on the disorder hollow core triangular lattice photonic crystal fiber," *Advances in Optoelectronics and Micro/Nano-Optics (AOM)*, 2010 OSA-IEEE-COS , vol., no., pp.1-4, 3-6 Dec. 2010
- [5] Gedik, E.; Topuz, E.; , "Photonic Band Gaps of the Honeycomb Photonic Crystal Fiber Structure," *Signal Processing and Communications Applications*, 2007. SIU 2007. IEEE 15th , vol., no., pp.1-4, 11-13 June 2007
- [6] Chen, Daru; , "Absolutely single polarization photonic crystal fiber based on a structure of sub-wavelength hole pitch," *Communications and Photonics Conference and Exhibition (ACP)*, 2009 Asia , vol.2009-Supplement, no., pp.1-6, 2-6 Nov. 2009
- [7] Morishita, K.; Miyake, Y.; , "Fabrication and resonance wavelengths of long-period gratings written in a pure-silica photonic crystal fiber by the glass structure change," *Lightwave Technology, Journal of* , vol.22, no.2, pp. 625-630, Feb. 2004
- [8] Matsui, T.; Nakajima, K.; Fukai, C.; , "Applicability of Photonic Crystal Fiber With Uniform Air-Hole Structure to High-Speed and Wide-Band Transmission Over Conventional Telecommunication Bands," *Lightwave Technology, Journal of* , vol.27, no.23, pp.5410-5416, Dec.1, 2009
- [9] AbdelMalek, F.; Hongbo Li; Schulzgen, A.; Moloney, J.V.; Peyghambarian, N.; Ademgil, H.; Haxha, S.; , "A Nonlinear Switch Based on Irregular Structures and Nonuniformity in Doped Photonic Crystal Fibers," *Quantum Electronics, IEEE Journal of* , vol.45, no.6, pp.684-693, June 2009
- [10] Najafi, A.; Jalalkamali, M.; Moghadamzadeh, S.; Bolorizadeh, M.A.; , "Finite Element Method Analysis of Photonic Crystal Fiber Band Structure," *Photonics and Optoelectronic (SOPO)*, 2010 Symposium on , vol., no., pp.1-4, 19-21 June 2010
- [11] Juan Juan Hu; Guobin Ren; Ping Shum; Xia Yu; Guanghui Wang; Chao Lu; , "Analytical method for band structure calculation of liquid crystal filled photonic crystal fibers," *Opto-Electronics and Communications Conference, 2008 and the 2008 Australian Conference on Optical Fibre Technology. OECC/ACOFT 2008. Joint conference of the* , vol., no., pp.1-2, 7-10 July 2008
- [12] Gedik, E.; Topuz, E.; , "An Investigation of the Photonic Crystal Fiber Structure with Different Air Hole Diameter," *Signal Processing and Communications Applications*, 2006 IEEE 14th , vol., no., pp.1-4, 17-19 April 2006
- [13] Jung-Sheng Chiang; Tzong-Lin Wu; , "A novel periodic structures in photonic crystal fibers," *Lasers and Electro-Optics*, 2003. CLEO/Pacific Rim 2003. The 5th Pacific Rim Conference on , vol.1, no., pp. 17 Vol.1, 15-19 Dec. 2003
- [14] Chen, Daru; , "Absolutely single polarization photonic crystal fiber based on a structure of sub-wavelength hole pitch," *Communications and Photonics Conference and Exhibition (ACP)*, 2009 Asia , vol., no., pp.1-2, 2-6 Nov. 2009
- [15] Wang Guanjun; Liu Jiansheng; Zheng Zheng; Yi Yang; Xiao Jing; Bian Yusheng; , "A fast response photonic crystal fiber grating refractometer with a side-opening structure," *Lasers and Electro-Optics (CLEO)*, 2011 Conference on , vol., no., pp.1-2, 1-6 May 2011
- [16] Lin, Y.; Herman, P. R.; Valdivia, C. E.; Li, J.; Kitaev, V.; Ozin, G. A.; , "Photonic band structure of colloidal crystal self-assembled in hollow core optical fiber," *Applied Physics Letters* , vol.86, no.12, pp.121106-121106-3, Mar 2005
- [17] Jianhua Li; Rong Wang; Jingyuan Wang; Baofu Zhang; Hua Zhou; , "Highly birefringent photonic crystal fiber with hybrid cladding structure," *Communications and Photonics Conference and Exhibition (ACP)*, 2010 Asia , vol., no., pp.222-223, 8-12 Dec. 2010