

Puerto-Leguizamón, Gustavo Adolfo; Realpe-Mancipe, Laura Camila; Suárez-Fajardo, Carlos Arturo
Dynamic wired-wireless architecture for WDM stacking access networks
Dyna, vol. 81, núm. 188, diciembre-, 2014, pp. 139-144
Universidad Nacional de Colombia
Medellín, Colombia

Available in: <http://www.redalyc.org/articulo.oa?id=49632758018>



Dyna,
ISSN (Printed Version): 0012-7353
dyna@unalmed.edu.co
Universidad Nacional de Colombia
Colombia

Dynamic wired-wireless architecture for WDM stacking access networks

Gustavo Adolfo Puerto-Leguizamón ^a, Laura Camila Realpe-Mancipe ^b & Carlos Arturo Suárez-Fajardo ^c

^a Facultad de Ingeniería, Universidad Distrital Francisco José de Caldas, Bogotá, Colombia. gapuerto@udistrital.edu.co

^b Universidad Distrital Francisco José de Caldas, Bogotá, Colombia. lcrealpem@correo.udistrital.edu.co

^c Facultad de Ingeniería, Universidad Distrital Francisco José de Caldas, Bogotá, Colombia. csuarezf@udistrital.edu.co

Received: December 22th, 2013. Received in revised form: March 3th, 2014. Accepted: September 25th, 2014.

Abstract

This paper presents a dynamic architecture for convergent wired and wireless access networks in Time Division Multiplexing (TDM) based Passive Optical Network (PON) featuring wavelength stacking. Four wavelengths for wired services carrying 10 Gb/s traffic load, one shared extra reconfigurable wavelength and one wavelength common to all Optical Network Units (ONUs) for the transport of wireless services were launched into a 1:64 splitting ratio PON network. In the ONU, a tunable free spaced Fourier optics based filter selects one of the wavelengths conveying wired services and a tunable Fiber Bragg Grating (FBG) filters out the wavelength carrying the wireless services. In the uplink direction, subcarrier multiplexing (SCM) was used for the combined transport of the wired and wireless signals to the Central Office (CO).

Keywords: Access Networks, Dynamic Wavelength Allocation, Optical Filters, WDM Stacking, Wired-Wireless Convergence.

Arquitectura dinámica fija-móvil para redes de acceso WDM apiladas

Resumen

Este artículo presenta una arquitectura dinámica para redes de acceso convergentes fijas e inalámbricas en red óptica pasiva (PON) basada en multiplexación en división de tiempo (TDM) bajo el paradigma de apilamiento de longitudes de onda. Cuatro longitudes de onda para servicios fijos transportando una carga de tráfico de 10 Gb/s, una longitud de onda reconfigurable extra y una longitud de onda común a todas las unidades de red óptica (ONU) para el transporte de servicios inalámbricos se enviaron a una PON con un relación de división de 1:64. En la ONU un filtro sintonizable basado en óptica de Fourier de espacio libre selecciona una de las longitudes de onda que transporta servicios fijos y un filtro basado en redes de difracción de Bragg (FBG) extrae la longitud de onda que transporta servicios inalámbricos. En el enlace de subida se utilizó multiplexación por división de subportadora (SCM) para el transporte combinado de señales en banda base e inalámbricas a la oficina central (CO).

Palabras clave: Asignación Dinámica de Longitudes de Onda, Apilamiento WDM, Convergencia fija-inalámbrica, Filtros Ópticos, Redes de Acceso.

1. Introduction

High capacity optical access networks providing high bandwidth and reliable services to fixed users can also be exploited to deal with the transport of wireless services. Such hybrid architecture might emerge as a viable access solution where the optical network provides flexible high capacity backhaul to mobile end users [6-9]. To date, several approaches for converged transport of wired and wireless services in optical access networks have been

proposed. A study on the effects of simultaneous wired and wireless transmission on fiber is discussed in [10], an analysis on the optical mobile backhauling is presented in [11] and a discussion on the requirements posed on the optical network technologies from the cellular mobile network is presented in [12]. Recently, a study dealing with the optimized placement of base band units acting as hotels that group several remote radio heads in a converged WDM access network was discussed in [13] and [14] described a view on the evolution of radio access

networks supported by WDM exploitation in an already deployed infrastructure.

On the other hand, different approaches regarding dynamic capacity allocation have also been proposed. In [15], a remote node based on the combination of an optical switch and an Arrayed Waveguide Grating (AWG) enables the dynamic wavelength assignment among different ONUs, also active routing using Semiconductor Optical Amplifiers (SOA) have been proposed as a solution to dynamically distribute wavelength channels in the access network [16-18]. Consequently, it is clear that fixed and mobile convergence has become a hot topic in the optical networking field, in this context Radio over Fiber (RoF) systems technologies will enable combined transport of fixed and mobile users in the future access networks [19], [20]. As seen, advanced features such as dynamic capacity allocation and capacity upgrade have been proposed based on improvements performed on the remote node or point of wavelength distribution. Such enhancement involves the use of active components that are highly sensitive to polarization and leads to precise control and maintenance of it. Therefore, the challenge is to enable convergence and dynamic wavelength allocation among some other characteristics in an already deployed infrastructure, where the high bandwidth provided by the optical fiber and the ubiquity and flexible connectivity of the wireless access can be merged in a unified optical access platform. To address such requirements, namely, the increment of capacity, dynamic convergent wired and wireless access networks, load balancing and resilience while enabling a seamless way to evolution over the next years by reusing the current fiber infrastructure, a dynamic optical access platform based on a novel (CO) architecture that performs the wavelength stacking of several TDM-PON systems has been proposed and experimentally demonstrated.

2. Materials and methods

2.1. Architecture description

The approach for a wavelength stacked access network featuring dynamic wavelength allocation and convergent wired-wireless traffic in both CO and ONU is depicted in Fig. 1. In the CO, four wavelengths, 0.8 nm spaced, are multiplexed and broadcasted by means of the combination of a passive matrix and an Arrayed Waveguide Grating (AWG). This arrangement allows the even and low loss distribution of the four wavelengths between several PONs. An optical switch placed between the wavelength feeder and the AWG provides dynamic wavelength assignment for wireless distribution and capacity upgrade purposes. In particular, for the wireless traffic, a set of wavelengths denoted as (λ_{w}) use the next upper Free Spectral Range (FSR) of the AWG, these wavelengths are assigned individually depending on the demand to each one of their peers (λ_{w}) at the wavelength feeder. As a result, they are also broadcasted to each one of the ONUs enabling a converged platform for the distribution of wireless signals and with the capability of adding up to 4

wavelengths for overlay wireless traffic. For capacity upgrade of the wired traffic, an extra wavelength common to all the ONUs is mapped to an input port of the AWGs resulting in a selective capability to upgrade capacity among different ONUs. Inset (a) in Fig. 1 shows the downstream wavelengths: four fixed, one extra-wavelength and one wavelength for wireless transport. After fiber transmission and distribution, the downstream signal reach the ONU where an optical coupler splits the signal in two in order to recover the wireless and wired wavelengths respectively. For the wireless traffic a tunable Fiber Bragg Grating (FBG) filters out from the downstream signals $\lambda_{\text{w}}^{\text{RF}}$, whereas for the wired data, a tunable free-spaced Fourier optics (FSFO) based optical filter selects one from four possible wavelengths (λ_{w}). In both cases, the wavelength allocation is dynamic as each ONU can be assigned with different wavelength channels depending of the traffic load on the network. Inset (b) depicts the architecture of the ONU. In the upstream, all the users share the same wavelength and both wired and wireless traffic is transported using subcarrier multiplexing (SCM) as seen in inset (c). Wireless and wired signals are electrically multiplexed. Direct modulation and Time Division Multiple Access (TDMA) are considered for the uplink connection. In the uplink, in order to avoid carrier suppression effects a FBG removes one of the sidebands of the upstream signal as seen in the spectrum shown in inset (d).

Subsequently down conversion of the wireless subcarrier and direct detection of both wired and wireless signals are performed. Overall, the presented architecture exploits the WDM stacking to enable the deployment of PON based access networks featuring converged transport and dynamic allocations of resources.

2.2. Implementation details

For the experimental demonstration, continuous wave (CW) laser sources generating four wavelengths spaced 0.8 nm with an average modulated optical power of 15 dBm were used at the wavelength feeder. The four fixed wavelength channels were $\lambda_1 = 1546.64$ nm, $\lambda_2 = 1547.44$ nm, $\lambda_3 = 1548.24$ nm and $\lambda_4 = 1549.04$ nm. The extra wavelength λ_{Extra} is centered at 1549.86 nm and λ_{RF} is 1553.08 nm which correspond to the next upper FSR of the 1X8 AWG. The four multiplexed wavelength channels for wired services convey 10 Gb/s traffic Non Return to Zero (NRZ) encoded and the wavelength for the transport of wireless services conveys 10 MBauds, 16QAM modulated onto 5 GHz. For the uplink, all the ONUs share the same wavelength centered at 1532.7 nm that conveys SCM-combined 2.5 Gb/s and 5 MBauds 4QAM modulated onto 5 GHz. The passive matrix is intended to distribute a wavelength channel between different PONs, for demonstration purposes the wavelength channels were directly multiplexed through a gaussian band-pass profile 1X8 AWG with roughly 3 dB insertion losses. A circulator allows the use of a single strand of fiber for bidirectional transmission.

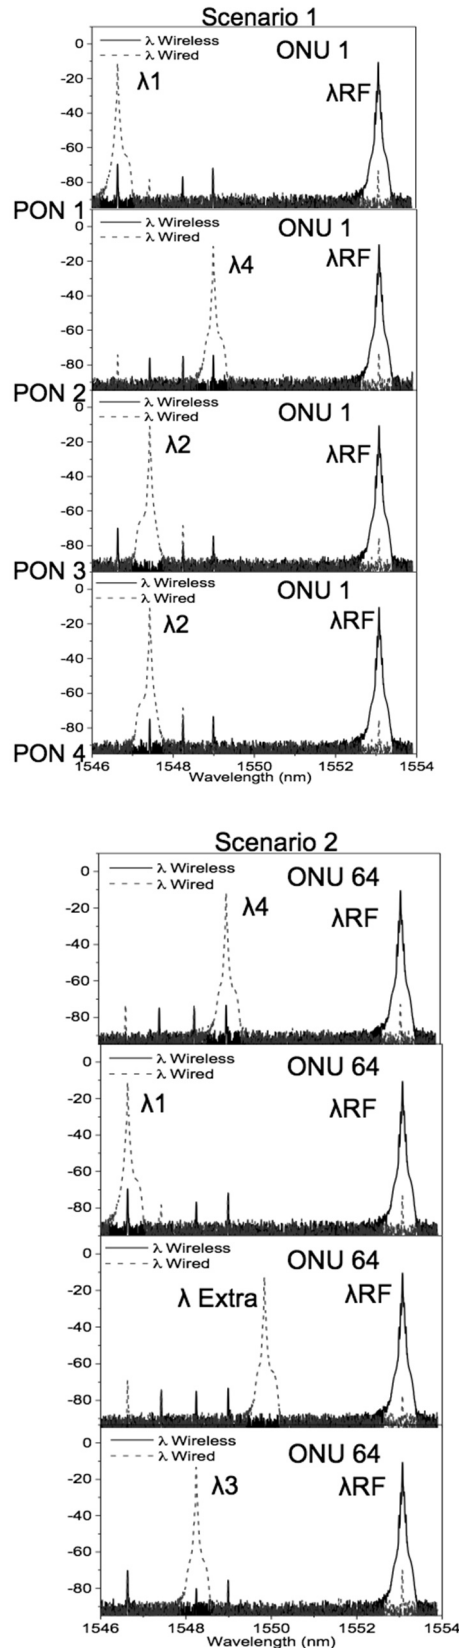


Figure 2. Experimental results. Scenarios of dynamic wavelength allocation in wavelength stacked access networks
Source: The Authors

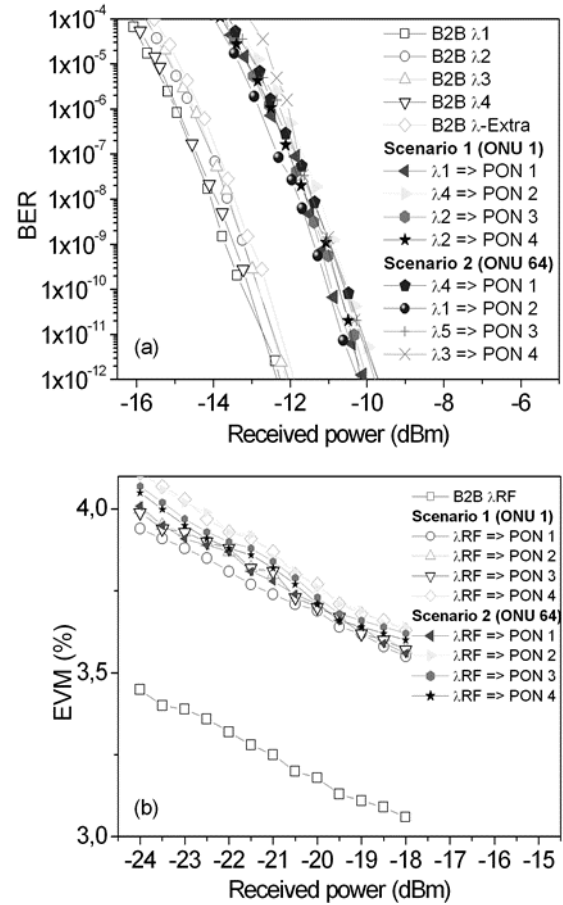


Figure 3. Experimental results. (a) Downlink BER. (b) Downlink EVM
Source: The Authors

Negligible quality differences were found in the uplink services coming from different PONs.

4. Conclusions

An optical architecture for converged transport of wired and wireless signals featuring dynamic allocation in multi-wavelength WDM-TDM PON access networks was presented. Four wavelengths for wired services 0.8 nm spaced common to all ONUs and one dynamically routed wavelength were broadcasted in the downlink direction. For the wireless services, up to four dedicated and common wavelengths to all ONUs can be used. Exploitation of the wavelength stacking paradigm to implement dynamic wavelength allocation, load balancing and capacity upgrade for converged transport while allow a seamless way to evolution by reusing the current fiber infrastructure constitutes the novelty and fundamental basis of this approach. This proposal aims at upgrading both the CO and ONU architectures in order to provide WDM connectivity between them. The fact that a stack of wavelengths are broadcasted from the CO to different PON may generate a potential limiting factor in the power budget due to the insertion losses imposed by the optical components placed at the CO and the high splitting ratio proposed. However, the power requirements can be relaxed by using high

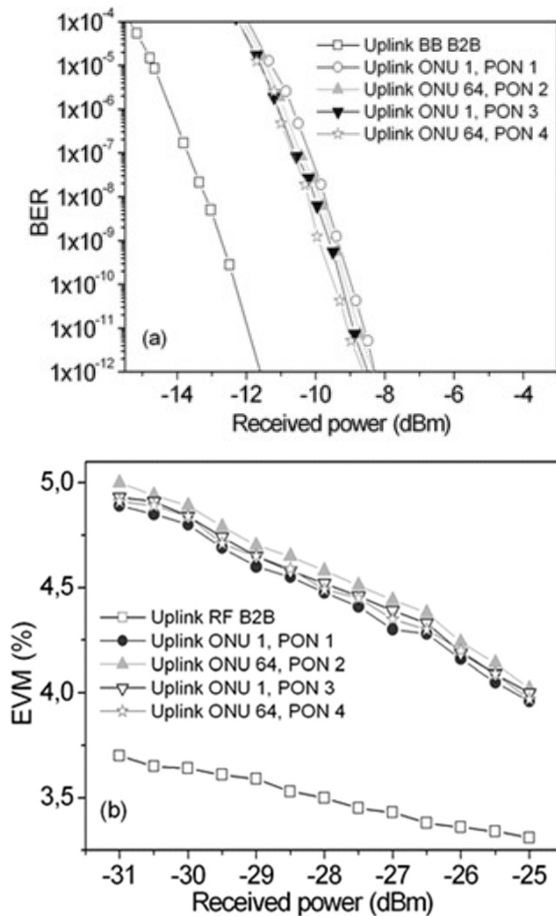


Figure 4. Experimental results. (a) Uplink BER. (b) Uplink EVM
Source: The Authors

sensitivity optical receivers at the ONU, typical values of commercial optical detector for PON applications ranges from -27 to -32 dBm. Therefore, the approach is feasible in terms of optical power as long as an appropriate power budget is assured by selecting the right optical devices to implement the CO and OLT.

As far as the dynamic WDM behavior, tunable filters are used to extract the wired and wireless wavelengths from the downstream channels; in particular a 20 GHz narrow FBG was used to filter the wavelength carrying the wireless services and a free spaced Fourier optics based filter featuring a bandwidth of 25 GHz was used to select one of the wavelengths carrying the baseband data. Regarding the tunable filters, so far no practical candidate technology can perform fast selection, while there are several technologies for slow selection, such as Fabry-Perot filters, thermally tuned semiconductor optical filters, FBGs or the used in the experiments based on free spaced Fourier optics. Therefore, further research is needed to implement wavelength-tunable optical filters featuring fast optical channel selection. As for the quality of the transported signals, the experimental measurements confirm the good performance of the system, 0.5% degradation for EVM and 2 dB penalties in average for 1×10^{-12} BER in the downlink whereas 1.25% degradation for EVM with 3.7 dB penalty in average for 1×10^{-12} BER in the uplink was measured.

5. Acknowledgement

The authors wish to acknowledge the Optical and Quantum Communications Group of the Universidad Politécnica de Valencia, the E.U. funded project ALPHA 212 352 and the Universidad Distrital Francisco José de Caldas for supporting the realization of this paper

References

- [1] Moeyaert, V. and Maier, G., Network technologies for broadband access, 13th International Conference on Transparent Optical Networks (ICTON), pp. 1-5, 2011.
- [2] Davey, R., Kani, J., Bourgart, F. and McCammon, K., Options for future optical access networks, IEEE Communications Magazine, 44 (10), pp. 50-56, 2006. <http://dx.doi.org/10.1109/MCOM.2006.1710412>
- [3] Kazovsky, L., Shaw, W., Gutierrez, D., Cheng, N. and Wong, S., Next-generation optical access networks, J. Lightwave Technol. 25 (11), pp. 3428-3442, 2007. <http://dx.doi.org/10.1109/JLT.2007.907748>
- [4] Hsueh, Y., Rogge, M., Yamamoto, S. and Kazovsky L., A highly flexible and efficient passive optical network employing dynamic wavelength allocation, IEEE J. Lightw. Technol., 23 (1), pp. 277-286, 2005. <http://dx.doi.org/10.1109/JLT.2004.838811>
- [5] Kani, J., Enabling technologies for future scalable and flexible WDM-PON and WDM/TDM-PON systems, IEEE Journal of Selected Topics in Quantum Electronics, 16 (5), pp. 1290-1297, 2010. <http://dx.doi.org/10.1109/JSTQE.2009.2035640>
- [6] Venkatesan, G. and Kulkarni, K., Wireless backhaul for LTE-requirements, challenges and options, 2nd International Symposium on Advanced Networks and Telecommunication Systems, pp. 1-3, 2008.
- [7] Popov, M., The convergence of wired and wireless services delivery in access and home networks, Optical Fiber Communication Conference and Exposition (OFC/NFOEC) and the National Fiber Optic Engineers Conference, pp. 1-3, 2010.
- [8] Chanclou, P., Belfqih, Z., Charbonnier, B., Duong, T., Frank, F., Genay, N., Huchard, M., Guignard, P., Guillo, L., Landousies, B., Pizzinat, A., Ramanitra, H. and Saliou, F., Optical access evolutions and their impact on the metropolitan and home networks, 34th European Conference on Optical Communication, pp.1-3, 2008.
- [9] Ali, M.A., Ellinas, G., Erkan, H., Hadjiantonis, A. and Dorsinville, R., On the vision of complete fixed-mobile convergence, J. Lightwave Technol., 28 (16), pp. 2343-2357, 2010. <http://dx.doi.org/10.1109/JLT.2010.2050861>
- [10] Yong-Yuk, W., Moon-Ki, H., Yong-Hwan, S. and Sang-Kook, H., Colorless two different gigabit data access transmissions using optical double sideband suppressed carrier and optical sideband slicing, IEEE/OSA Journal of Optical Communications and Networking, 5 (6), pp. 544-553, 2013. <http://dx.doi.org/10.1364/JOCN.5.000544>
- [11] Larraqui, K., Small cell optical mobile backhauling: Architectures, challenges, and solutions, 39th European Conference and Exhibition on Optical Communication, pp. 1-3, 2013. <http://dx.doi.org/10.1049/cp.2013.1298>
- [12] Kellerer, W., Kiess, W., Scalia, L., Biermann, T., Choi, C. and Koza, K., Novel cellular optical access network and convergence with FTTH, Optical Fiber Communication Conference and Exposition (OFC/NFOEC) and the National Fiber Optic Engineers Conference, pp. 1-3, 2012.
- [13] Carapellese, N., Tornatore, M. and Pattavina, A., Placement of base-band units (BBUs) over fixed/mobile converged multi-stage WDM-PONs, 17th International Conference on Optical Network Design and Modeling (ONDM), pp. 246-251, 2013.
- [14] Ponzini, F., Giorgi, L., Bianchi, A. and Sabella, R., Centralized radio access networks over wavelength-division multiplexing: a plug-and-play implementation, IEEE Communications Magazine, 51 (9), pp. 94-99, 2013. <http://dx.doi.org/10.1109/MCOM.2013.6588656>

- [15] Ortega, B., Mora, J., Puerto, G. and Capmany, J. Symmetric reconfigurable capacity assignment in a bidirectional DWDM access network, *Optics Express*, 15 (25), pp. 16781-16786, 2007. <http://dx.doi.org/10.1364/OE.15.016781>
- [16] Yang, H., Shi, Y., Okonkwo, C.M., Tangdiongga, E. and Koonen, A.M.J., Dynamic capacity allocation in radio-over-fiber links, *IEEE Topical Meeting on Microwave Photonics (MWP)*, pp. 181-184, 2010.
- [17] Nguyen-Cac, T., Hyun-Do, J., Okonkwo, C., Tangdiongga, E., Koonen, T. Dynamically delivering radio signals by the active routing optical access network, *IEEE Photonics Technology Letters*, 24(3), pp. 182-184, 2012. <http://dx.doi.org/10.1109/LPT.2011.2175910>
- [18] Zou, S., Okonkwo, C.M., Cao, Z., Nguyen-Cac, T., Tangdiongga, E. and Koonen, T., Dynamic optical routing and simultaneous generation of millimeter-wave signals for in-building access network, *Optical Fiber Communication Conference and Exposition (OFC/NFOEC) and the National Fiber Optic Engineers Conference*, pp. 1-3, 2012.
- [19] Dat, P.T., Kanno, A., Inagaki, K. and Kawanishi, T., High-Capacity wireless backhaul network using seamless convergence of radio-over-fiber and 90-GHz millimeter-wave, *J. of Lightwave Technol.*, 32 (20) pp. 3910-3923, 2014. <http://dx.doi.org/10.1109/JLT.2014.2315800>
- [20] Kyung W.L., Jung H.P. and Hyun D.J., Comparison of digitized and analog radio-over-fiber systems over WDM-PON networks, *International Conference on ICT Convergence (ICTC)*, pp. 705-706, 2013.
- [21] Aguiar, M., Gómez, J. y Torres, P., Modelamiento térmico y vibratorio de una cápsula para sensores de fibra óptica adaptables a mediciones en sistemas eléctricos de potencia. *Revista DYNA*, 76 (157), pp. 243-250, 2009.

G.A. Puerto-Leguizamón, received the BSc. in Telecommunications Engineering in 2002. He joined the Institute of Telecommunications and Multimedia Applications at the Universitat Politècnica de València in Spain, where he received the Advanced Research Studies in 2005 and the PhD. degree in 2008. As postdoctoral researcher he performed as co-leader of the workpackage about new generation of physical technologies for optical networks in the framework of the European funded project ALPHA (Architectures for Flexible Photonics Home and Access Networks). Since 2012 he is an Assistant Professor at the Universidad Distrital Francisco José de Caldas in Bogotá where he is with the Laboratory of Microwave, Electromagnetism and Radiation (LIMER). He has published more than 40 papers in journals and international conferences and he is a reviewer of the *IEEE Journal on Lightwave Technologies* and *IEEE Photonic Technology Letters*. His research interests include optical networking and radio over fiber systems.

L.C. Realpe-Mancipe, is student of the Universidad Distrital Francisco José de Caldas in Bogotá, Colombia, where she is pursuing the BSc. in Electronic Engineering. She is actively involved in the activities of the IEEE student branch at the university. In 2013 she joined the Laboratory of Microwave, Electromagnetism and Radiation (LIMER) as an assistant researcher in the framework of the research project "Dynamic architectures for converged optical access networks" where she is developing her final project. His research interests include optical networking and optical access networks.

C.A. Suárez-Fajardo, received the MSc. and PhD. degrees in Telecommunications Engineering from the Universitat Politècnica de València, Valencia, Spain, in 2003 and 2006, respectively. In 2006, he founded the Laboratory of Microwave, Electromagnetism and Radiation (LIMER) research group at the University Distrital Francisco José de Caldas in Bogotá, Colombia, and in 2007 he became as an associate professor at the same University. He has published more than 40 papers in journals and international conferences and he is a reviewer of the *Chilean Journal Engineering* and *Journal of Antennas and Propagation (IJAP)*. His research interests include wideband and multi-band planar antenna design and optimization, microwave engineering, applied electromagnetic and small satellite communication systems.



UNIVERSIDAD NACIONAL DE COLOMBIA

SEDE MEDELLÍN

FACULTAD DE MINAS

Área Curricular de Ingeniería de Sistemas e Informática

Oferta de Posgrados

- Especialización en Sistemas
- Especialización en Mercados de Energía
- Maestría en Ingeniería - Ingeniería de Sistemas
- Doctorado en Ingeniería- Sistema e Informática

Mayor información:

Carlos Jaime Franco Cardona
Director de Área curricular
acsei_med@unal.edu.co
(57-4) 425 5365

