

Developments towards a transverse free-electron target for the storage ring CRYRING@ESR

C. Brandau^{*,†,‡}, A. Borovik, Jr.^{*}, B. M. Döhning^{*}, B. Ebinger^{*}, C. Kozhuharov[†], T. Molkentin^{*}, A. Müller[§], Th. Stöhlker^{‡,¶,||}, and S. Schippers^{‡,2}, for the SPARC working group “Electron Targets”

^{*} I. Physikalisches Institut, Justus-Liebig-Universität Gießen, 35392 Giessen, Germany

[†] GSI Helmholtzzentrum für Schwerionenforschung, 64291 Darmstadt, Germany

[§] Institut für Atom- und Molekülphysik, Justus-Liebig-Universität Gießen, 35392 Giessen, Germany

[‡] Institut für Optik und Quantenoptik, Friedrich-Schiller-Universität Jena, 07743 Jena, Germany

^{||} Helmholtz-Institut Jena, 07743 Jena, Germany

Synopsis A transverse free-electron target for crossed-beams collision studies is currently being developed. The target will be installed in the main experimental section of the FAIR storage ring CRYRING@ESR. The setup will allow for electron-ion collision studies with highly charged ions on an unprecedented level of detail that comprises, e.g., the angle-differential observation of photon emission.

The storage ring CRYRING@ESR will be one of the first operational devices at the upcoming anti-proton and heavy-ion accelerator facility FAIR. As a part of the program of the SPARC collaboration it is intended to install a dedicated sheet-beam free-electron target at CRYRING@ESR [1]. Electron-ion collision studies with transverse electron targets were conducted at low-energy single-pass beam lines since the 1960s [2] but a crossed-beams setup has never been realized at a heavy-ion storage ring, yet. Currently, a new electron gun is being developed (Fig. 1) that advances previous multi-electrode arrangements [3, 4, 5] with adaptations to the special requirements at CRYRING@ESR, namely, free space for the circulating ion beam and stringent vacuum conditions with residual gas pressures of the order of 10^{-11} mbar. The multi-electrode layout enables a detailed control of electron-beam parameters such as beam size, electron density and electron energy. Maximum electron energies up to 12.5 keV are envisaged. The typical beam-size in the interaction region is $8 \times 80 \text{ mm}^2$ at an electron density of up to 10^9 cm^{-3} .

The set-up is optimized for spectroscopy of photons thus enabling many new opportunities for experimental access to fundamental electron-ion collision processes including excitation, recombination, elastic scattering and ionization. In contrast to collision studies at a gas-jet target, no target nucleus is present. Hence, observations of electron-impact excitation or electron-ion recombination are not obscured by competing processes like proton-impact excitation or non-radiative capture. A further advantage is that the electron-ion collision energy can easily be changed over a wide range without changing the ion energy.

This work is supported by German Federal Min-

istry of Education and Research BMBF (contract 05P15RGFAA), and the Helmholtz International Center for FAIR, a Hessian state funded Center of Excellence.

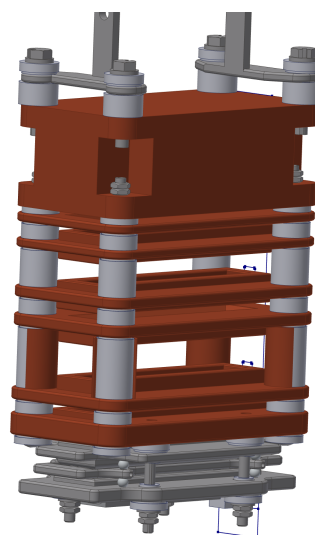


Figure 1. Current design of the new electron gun, which is still being optimized. The electron beam is directed bottom to top.

References

- [1] M. Lestinsky *et al.* 2016 *Eur. Phys. J. ST* **225** 797
- [2] A. Müller 2008 *Adv. At. Mol. Opt. Phys.* **55** 293
- [3] W. Shi *et al.* 2003 *Nucl. Instrum. Meth. B* **205** 201
- [4] S. Geyer *et al.* 2013 *Phys. Scr.* **T156** 014093
- [5] A. Borovik Jr. *et al.* 2014 *J. Phys.: Conf. Ser.* **488** 142007

¹E-mail: c.brandau@gsi.de

²E-mail: Stefan.Schippers@physik.uni-giessen.de

