

Report Title:

Flux Enhancement in Crossflow Membrane Filtration: Fouling and It's  
Minimization by Flow Reversal

Report Type: ANNUAL

Reporting Period Start Date: 09/01/2003

End Date: 08/31/2004

Principal Author(s): Shamsuddin Ilias

Report Issue Date: January 25, 2005

DOE Award No.: DE-FG26-00NT40834

Name and Address of Submitting Organization:

North Carolina A&T State University  
Department of Mechanical and Chemical Engineering  
Greensboro, NC 27411  
E-mail: [ilias@ncat.edu](mailto:ilias@ncat.edu)  
Tel: (336) 334-7564 ext 317 Fax: (336) 334-7904

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

## ABSTRACT

Fouling problems are perhaps the single most important reason for relatively slow acceptance of ultrafiltration in many areas of chemical and biological processing. To overcome the losses in permeate flux associated with concentration polarization and fouling in cross flow membrane filtration, we investigated the concept of flow reversal as a method to enhance membrane flux in ultrafiltration. Conceptually, flow reversal prevents the formation of stable hydrodynamic and concentration boundary layers at or near the membrane surface. Further more, periodic reversal of the flow direction of the feed stream at the membrane surface results in prevention and mitigation of membrane fouling. Consequently, these advantages are expected to enhance membrane flux significantly.

A crossflow membrane filtration unit was designed and built to test the concept of periodic flow reversal for flux enhancement. The essential elements of the system include a crossflow hollow fiber membrane module integrated with a two-way valve to direct the feed flow directions. The two-way valve is controlled by a controller-timer for periodic reversal of flow of feed stream. Another important feature of the system is that with changing feed flow direction, the permeate flow direction is also changed to maintain countercurrent feed and permeate flows for enhanced mass transfer driving force (concentration difference).

In this report, we report our application of Flow Reversal technique in clarification of apple juice containing pectin. The presence of pectin in apple juice makes the clarification process difficult and is believed to cause membrane fouling. Of all compounds found in apple juice, pectin is most often identified as the major hindrance to filtration performance. Based on our ultrafiltration experiments with apple juice, we conclude that under flow reversal conditions, the permeate flux is significantly enhanced when compared with the conventional unidirectional flow. Thus, flow reversal technology seems an attractive alternative to mitigate fouling problem in crossflow membrane filtration.

## TABLE OF CONTENTS

Title page	i
Disclaimer	ii
Abstract	iii
Table of Contents	iv
Executive Summary	v
Introduction	1
Research Objectives	2
Experimental: Materials and Methods	2
Results and Discussion	2
Conclusions	4
References	4

## **EXECUTIVE SUMMARY**

To test the concept of period flow reversal of feed and permeate flows, crossflow membrane filtration unit was designed and built. The system was successfully tested for crossflow filtration of BSA in tubular UF membrane module. Currently, we are testing pectin in apple juice as new feed solution. Like BSA, we observed encouraging results with pectin in apple juice clarification utilizing flow reversal technique. These experimental tests suggest that by flow reversal, significant enhancement of flux is possible and it can be used as an effective means to mitigate the deleterious effects of membrane fouling and concentration polarization.

## INTRODUCTION

In membrane-based separation, the terms “concentration polarization (CP)” and “membrane fouling” are always used to qualitatively and/or quantitatively to describe the flux decline. Specifically, in crossflow membrane filtration (e.g. reverse osmosis, ultrafiltration, microfiltration and nano-filtration) the loss of permeate flux with time of operation is inevitable. In many process plants, the productivity or the transmembrane flux in general is limited by the concentration polarization and fouling. The flux may be as low as 2 to 10% of that of pure solvent (water) flux in ultrafiltration membrane processes [Smolder and Boomgard, 1989].

The *concentration polarization* is viewed as the accumulation of dissolved solutes and macromolecules near or on the surface of the membrane due to convective and back-diffusive flow of solvent. As long as the particle or solute concentration at the membrane surface does not reach the maximum packing or gel concentration, the concentration polarization layer is mobile and does not offer a significant hydraulic resistance to permeate flow [Redkar, et al., 1996]. When the solute concentration reaches the gel concentration, a stagnant layer develops which offers high resistance to permeate flow. The appreciable osmotic pressure in the polarized layer due to the high local solute concentration, results in lowering the transmembrane pressure driving force. Manipulating the operating conditions can lessen the severity of concentration polarization [Gekas and Hallstrom, 1987; Cheryan, 1998; Hargrove and Ilias, 1999]. The membrane *fouling* refers to the deposition of some feed components on the membrane surface and within the network of membrane pores.

In recent years, there has been renewed interest in understanding the underlying factors that limit the performance of crossflow membrane processes and in finding a solution to the flux decline phenomena due to concentration polarization and membrane fouling. Surface modification or feed pretreatment has little effect on membrane flux due to secondary or gel layer formation [Brink and Romjin, 1990; Kim, et al., 1988]. To alleviate the deleterious effect of concentration polarization and membrane fouling, flow modifications in crossflow membrane filtration are being studied as one of the most promising methods of choice.

Recently, we investigated the use of flow reversal in cross-flow membrane UF as a means of increasing transmembrane flux by reducing the deleterious effects of concentration polarization and membrane fouling. BSA is a well-studied model solute in membrane filtration known for its fouling and concentration polarization capabilities [Hargrove and Ilias, 1999, Ilias, et al., 2001]. From limited UF experiments with BSA, we observed that flow reversal significantly improves the permeate flux and merits further research.

In this proposal, we address the membrane-fouling problem in crossflow ultrafiltration and microfiltration systems as follows:

- In membrane separation processes when dealing with multicomponent feed streams, no matter how good is the membrane properties and system design, flux decline due to fouling and concentration polarization is inevitable.
- Flux decline problem is a two step process: far field effects (hydrodynamic interactions) and near field effects (surface forces, chemical and electrokinetic interactions).
- Management and control of far field and near field effects can only give us adequate answer to the solution and control of membrane fouling problem.

Thus to develop a generic approach to reduce the membrane fouling, we consider a novel innovative technique to manipulate the far field hydrodynamics in such a way that solute convection-diffusion transport and particle migration to the membrane surface can never form a stable layer. If this can be achieved, a substantial increase in transmembrane flux would be possible. From our recent work on the feasibility of flow reversal as a technique to enhancing crossflow membrane fluxes, we found that the flow reversal has a great potential in combating flux reducing effects due to concentration polarization and fouling.

## **RESEARCH OBJECTIVES**

The objectives of this research are to:

1. Design and build a proto-type laboratory scale crossflow membrane filtration unit with periodic flow reversal option
2. Perform membrane filtration experiments with BSA, Dextran T-70 and FGD wastewater with and without periodic flow reversal option and compare performances.
3. Model the periodic flow reversal in crossflow filtration and validate the experimental observations with model predictions.

## **EXPERIMENTAL: MATERIALS & METHODS**

Cross flow membrane filtration experiments were conducted in tubular UF membrane modules using two feed solutions. During this reporting period we investigated the UF of apple juice with pectin using our flow reversal technology. Pectin is a notorious foulant in membrane filtration. Some of the findings are discussed in this report.


The polysulfone UF membrane modules were obtained from A/G Technology. The membrane module has an effective length of 31.5 cm, and contains 13 fibers, each with an internal diameter of 1mm. The polysulfone membrane was rated at a nominal molecular weight cut-off of 3000. The basic experimental description has been reported in the previous annual report.

## **RESULTS AND DISCUSSIONS**


Cross-flow membrane filtration experiments were performed in polysulfone UF tubular membrane module with apple juice as a feed solution. The pectin content in the apple juice ranged from 0.01 wt% to 0.05 wt% and the operating transmembrane pressure ranged from 20 Psia to 30. Trans-membrane permeate flux data was collected for both the unidirectional and flow reversal conditions. Effect of feed flow rates and flow reversal times on permeate flux were investigated.

For comparison purpose, unidirectional flow is considered as base or reference case. Each experiment was conducted for about two hours. To maintain membrane performance, the membrane modules were thoroughly cleaned after each use according to manufacturer's cleaning procedure. Pure water flux data was collected initially for a new membrane and after each cleaning to ensure comparability of the experimental data.

The presence of pectin in apple juice makes the clarification process difficult and because of its fiber-like structure, which is believed to cause membrane fouling. Of all compounds found in apple juice, pectin is most often identified as the major hindrance to filtration performance. In Figures 1 through 3, the permeate flux and flux gain data presented three feed concentrations. Flux gain is defined as the ratio of flux under Flow Reversal condition over conventional flux at a given time of operation. The operating transmembrane pressure difference was 30 Psia and feed flow Reynolds number was,  $N_{Re} = 2184$ . With conventional UF operation, permeate flux drops rapidly with time. For the same operating conditions using our flow reversal technology, with flow reversal time,  $\tau_{rev} = 1$  min, we find a marked improvement in transmembrane flux

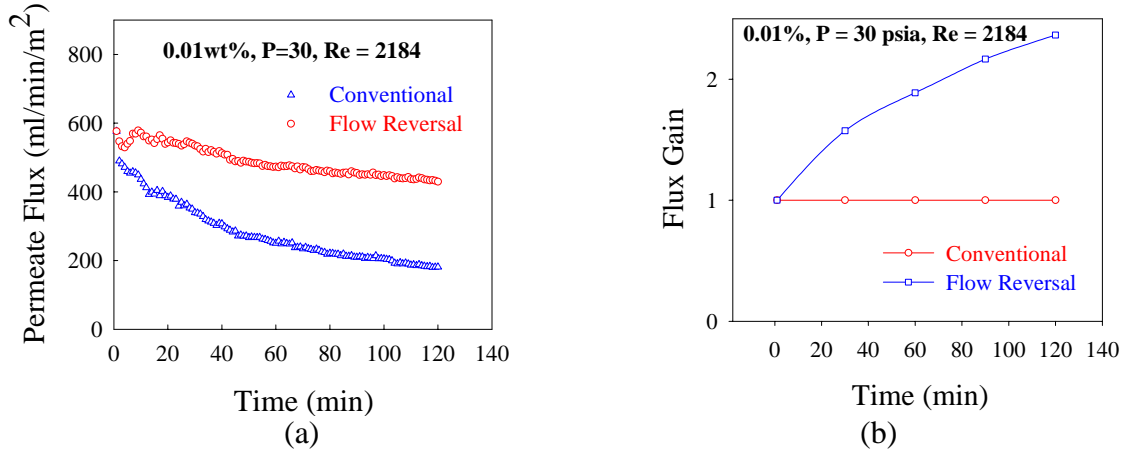


**Figure 1:** Comparison of (a) permeate flux data and (b) flux gain for 0.01 wt% pectin in apple juice at a transmembrane pressure,  $\Delta P_{TMP} = 30$  Psia, flow Reynolds number,  $N_{Re} = 2184$ , and flow reversal time,  $\tau_{rev} = 1$  min.

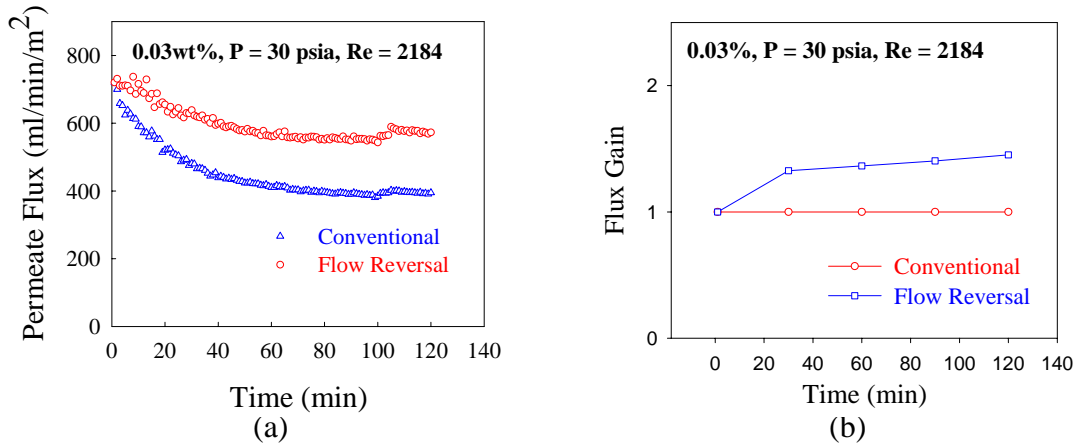

**Figure 2:** Comparison of (a) permeate flux data and (b) flux gain for 0.03 wt% pectin in apple juice at a transmembrane pressure,  $\Delta P_{TMP} = 30$  Psia, flow Reynolds number,  $N_{Re} = 2184$ , and flow reversal time,  $\tau_{rev} = 1$  min.



The results clearly show that by implementing Flow Reversal technology, it is possible to achieve significant flux enhancement and the permeate flux can be maintained at a higher level for a prolonged period of time.

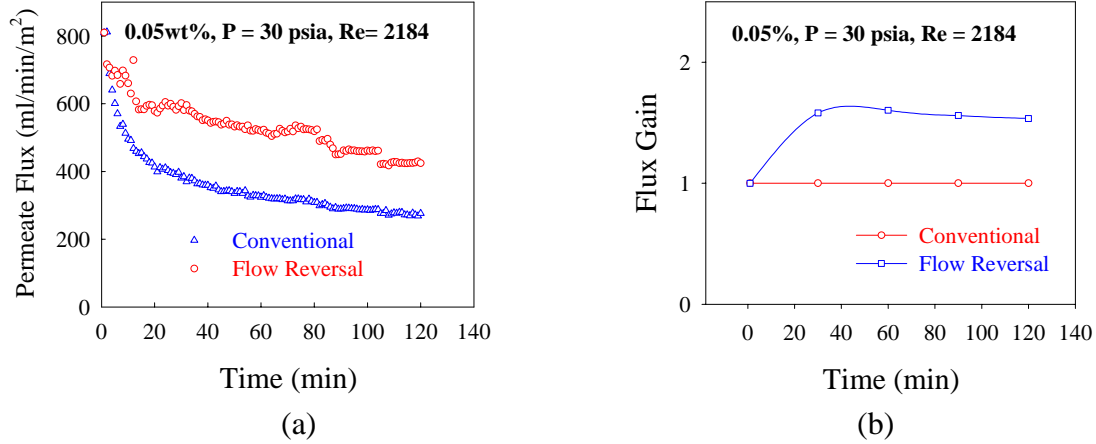

**Figure 3:** Comparison of (a) permeate flux data and (b) flux gain for 0.05 wt% pectin in apple juice at a transmembrane pressure,  $\Delta P_{TMP} = 30$  Psia, flow Reynolds number,  $N_{Re} = 2184$ , and flow reversal time,  $\tau_{rev} = 1$  min.

## CONCLUSIONS

The concept of periodic reversal of feed flow in cross flow UF operation for flux enhancement was investigated in a laboratory scale tubular UF membrane module using pectin in apple juice as feed solution. The results suggest that by flow reversal, significant enhancement of flux is possible and it can be used as an effective means to mitigate the deleterious effects of membrane fouling and concentration polarization. Our earlier work with BSA demonstrated similar flux enhancements with flow reversal.

## REFERENCES

- Smolder, C.A., and van den Boomgard, Th., *J. Memb. Sci.*, **40**, 121 (1989).
- Redkar, S.G., Kuberkar, V., and Davis, R.H., *J. Memb. Sci.*, **121**, 229 (1996).
- Gekas, V., and Hallstrom, B., *J. Memb. Sci.*, **30**, 153 (1987).
- Cheryan, M., *Ultrafiltration and Microfiltration Handbook*, Technomic Publishing Company, Lancaster, Pennsylvania, 1998.
- Hargrove, S., and Ilias, S., *Sep. Sci. Technol.*, **34**, 1319 (1999).
- Brink, L.E.S., and Romjin, J.D., *Desalination*, **78**, 209 (1990).
- Kim, K.J., Fane, A.G., and Fell, C.J.D., *Desalination*, **70**, 229 (1988).
- Ilias, S., Hargrove, S., and Talbert, M., "Flux Enhanced Crossflow Membrane Filter," U.S. Patent # 6,168,714 (2001).
- Ilias, S., Hargrove, S.C., and Talbert, M., "Method for Improving the Permeate Flux of a Cross-flow Membrane Filter," U.S. Patent # 6,423,230 (2002).