



LAWRENCE
LIVERMORE
NATIONAL
LABORATORY

Simulation of Shock Loading in Saturated Geologic Materials

B. T. Liu, I. Lomov, O. Vorobiev

September 17, 2004

International Symposium on Plasticity
Kauai, HI, United States
January 3, 2005 through January 8, 2005

Disclaimer

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

SIMULATION OF SHOCK LOADING IN SATURATED GEOLOGIC MATERIALS

Benjamin T. Liu, Ilya Lomov, and Oleg Vorobiev
Earth Sciences Division, Lawrence Livermore National Laboratory
7000 East Avenue, Livermore, CA 94550, USA
E-mail address: liu15@llnl.gov

ABSTRACT- The effective stress model is used to model the stress-strain, volumetric, and strength behavior in saturated materials under shock loading. The effective stress concept provides a predictive model of the behavior of wet porous materials based on the dry material properties. An effective stress model that allows for arbitrary fluid and solid equations of state and varying levels of saturation is incorporated into an adaptive mesh refinement (AMR) Eulerian shock physics hydrocode. Good agreement is found between simulation results and experimental data for saturated materials, even at moderately high pressures.

INTRODUCTION: The effective stress model has been used effectively to model the behavior of a variety of porous media including soils, concrete, and rock. The formulation due to Terzaghi (Jaeger and Cook [1976]) defines the effective pressure, P_{eff} , as

$$P_{\text{eff}} = P - P_{\text{fluid}} \quad (1)$$

where P is the total pressure and P_{fluid} is the fluid pressure in the pores. The effective stress is used rather than total pressure to determine stress-strain and strength behavior. Terzaghi's principle has been shown to work relatively well for most geotechnical applications, though significant deviations have been observed under pressures in excess of 100 MPa (Lade and de Boer [1997]).

PROCEDURES, RESULTS, AND DISCUSSION: Simulations of both dry and saturated materials were conducted using an Eulerian adaptive mesh refinement (AMR) hydrocode developed for shock loading of geologic materials. The effective stress concept was implemented such that saturated models can be trivially generated from the corresponding dry material models by providing a fluid equation of state. This implementation treats both fully and partially saturated materials and allows the use of arbitrary equations of state (from analytical equations, tabular data, or run-time databases) to be used for both the solid and the pore fluid; this is particularly useful at the high pressures associated with shock loading. In addition to implementing Eqn. 1 for pressure-dependent material response, the pore compaction behavior of the saturated material was determined by combining the response of the dry material with the behavior at solid-fluid equilibrium. A hyperelastic constitutive model incorporating strength, poro-elasticity, bulking, shear-enhanced compaction and distortional damage was developed for limestone (Lomov and Vorobiev [2004]). This model was calibrated to spherical wave data for dry limestone (Fig. 1). The experimental data were collected by SRI International (Gefken and Florence [1993]); the test consisted of a 3/8-g, 1.0-cm-

diameter pentaerythritol tetranitrate charge in 16% porous Indiana Salem limestone. Simulations using the corresponding saturated model were then compared to spherical wave data for fully saturated limestone (Fig. 2). The peak pressure is the saturated test was well in excess of 100 MPa. Despite the higher pressures, good agreement was found using the Terzaghi effective stress concept.

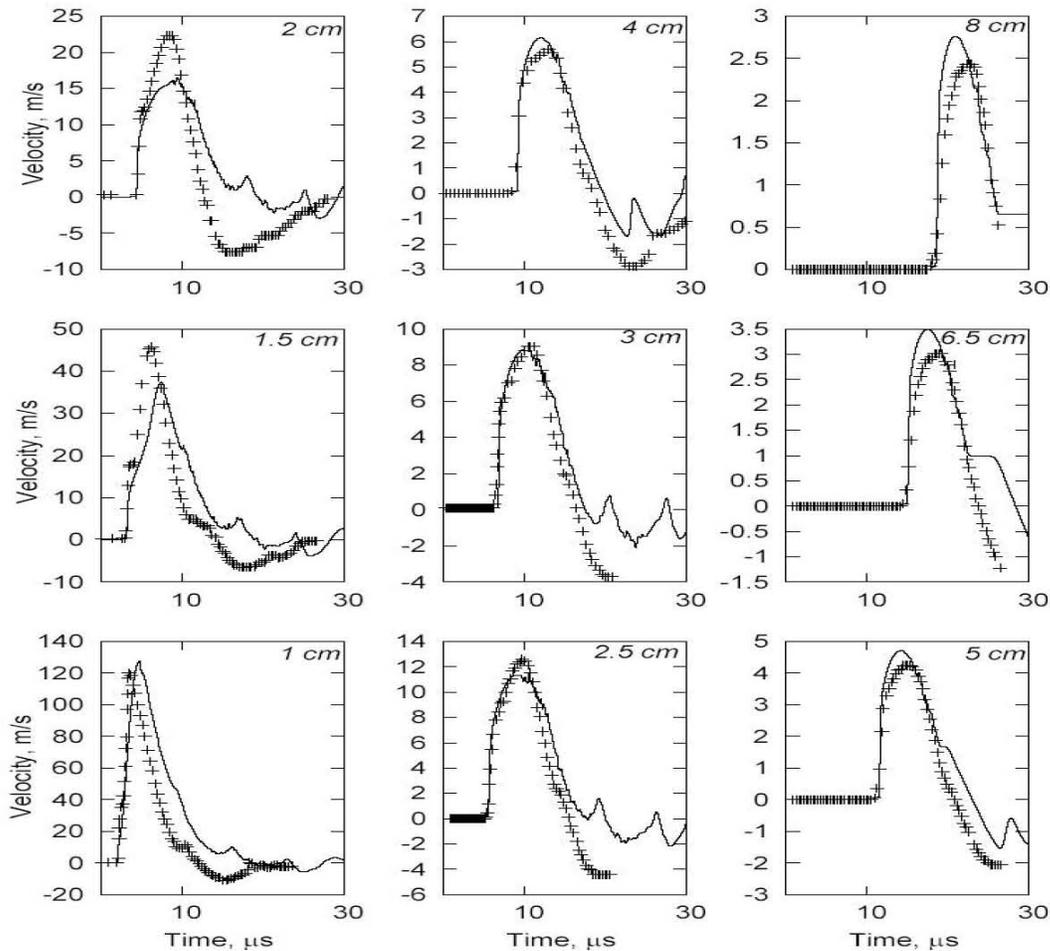


Figure 1. Comparison of velocity waveforms for dry limestone at varying distances from the explosive charge; experimental data (+) and simulation results (—). Model parameters were calibrated to this dataset.

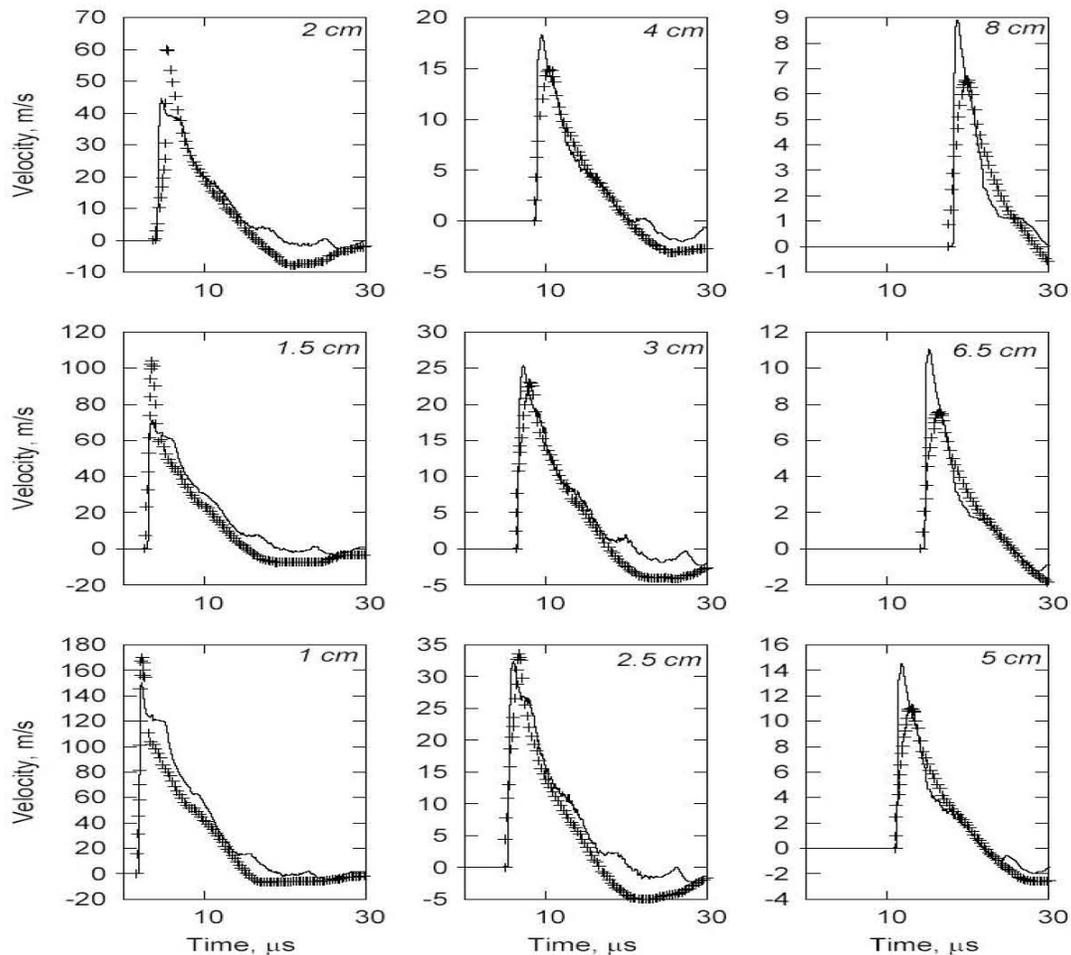


Figure 2. Comparison of velocity waveforms for saturated limestone at varying distances from the explosive charge; experimental data (+) and simulation results (—).

ACKNOWLEDGEMENTS: This work was performed under the auspices of the U.S. Department of Energy by the University of California, Lawrence Livermore National Laboratory under contract No. W-7405-Eng-48.

REFERENCES:

Gefken, P.R. and Florence, A.L. 1993, "Spherical waves in jointed limestone", SRI International, Defense Nuclear Agency Report No. DNA-TR-92-122.

Jaeger, J.C. and Cook, N.G.W. 1976, *Fundamentals of Rock Mechanics*, Halsted Press, New York.

Lade, P.V. and de Boer, R. 1997, "The concept of effective stress for soil, concrete and rock", *Géotechnique*, **47**, 61.

Lomov, I. and Vorobiev, O. 2004, "Simulation of shock wave propagation and damage in geologic materials", these proceedings.