


PPPL-4070

PPPL-4070

Electron Energy Confinement for HHFW Heating and Current Drive Phasing on NSTX

J.C. Hosea, S. Bernabei, T. Biewer, B. LeBlanc, C.K. Phillips,
J.R. Wilson, D. Stutman, P. Ryan, and D.W. Swain

May 2005



Prepared for the U.S. Department of Energy under Contract DE-AC02-76CH03073.

PPPL Report Disclaimers

Full Legal Disclaimer

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Trademark Disclaimer

Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors.

PPPL Report Availability

This report is posted on the U.S. Department of Energy's Princeton Plasma Physics Laboratory Publications and Reports web site in Fiscal Year 2005. The home page for PPPL Reports and Publications is: http://www.pppl.gov/pub_report/

Office of Scientific and Technical Information (OSTI):

Available electronically at: <http://www.osti.gov/bridge>.

Available for a processing fee to U.S. Department of Energy and its contractors, in paper from:

U.S. Department of Energy
Office of Scientific and Technical Information
P.O. Box 62
Oak Ridge, TN 37831-0062
Telephone: (865) 576-8401
Fax: (865) 576-5728
E-mail: reports@adonis.osti.gov

National Technical Information Service (NTIS):

This report is available for sale to the general public from:

U.S. Department of Commerce
National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161
Telephone: (800) 553-6847
Fax: (703) 605-6900
Email: orders@ntis.fedworld.gov
Online ordering: <http://www.ntis.gov/ordering.htm>

Electron Energy Confinement For HHFW Heating and Current Drive Phasing on NSTX

J. C. Hosea¹, S. Bernabei¹, T. Biewer¹, B. LeBlanc¹, C. K. Phillips¹,
J. R. Wilson¹, D. Stutman², P. Ryan³, D. W. Swain³

¹*Princeton Plasma Physics Laboratory, Princeton, NJ USA*

²*Johns Hopkins University, Baltimore, MD*

³*Oak Ridge National Laboratory, Oak Ridge, TN*

Abstract. Thomson scattering laser pulses are synchronized relative to modulated HHFW power to permit evaluation of the electron energy confinement time during and following HHFW pulses for both heating and current drive antenna phasing. Profile changes resulting from instabilities require that the total electron stored energy, evaluated by integrating the midplane electron pressure $P_{\text{sub}e}(R)$ over the magnetic surfaces prescribed by EFIT analysis, be used to derive the electron energy confinement time. Core confinement is reduced during a sawtooth instability but, although the electron energy is distributed outward by the sawtooth, the bulk electron energy confinement time is essentially unaffected. The radial deposition of energy into the electrons is noticeably more peaked for current drive phasing (longer wavelength excitation) relative to that for heating phasing (shorter wavelength excitation) as is expected theoretically. However, the power delivered to the core plasma is reduced considerably for the current drive phasing, indicating that surface/peripheral damping processes play a more important role for this case.

Keywords: RF Heating, Electron Energy and Confinement Time, Spherical Torus

PACS: 52.50.Qt, 52.55.Hc

INTRODUCTION

HHFW heating should occur via electron heating for ion temperatures less than ~ 2 keV [1] for the experiments considered here so that the incremental electron energy divided by the electron energy confinement time can serve as a good indicator of the RF power that is deposited in the bulk of the plasma in this case ($\Delta P_{\text{RFB}} = \Delta W_e / \tau_{we}$). With the introduction of a second Thomson scattering laser on NSTX [2] it is now possible to measure τ_{we} and W_e by synchronizing the two laser pulses relative to the modulated HHFW RF power. This then permits the comparison of bulk RF power deposition for different antenna phasing to determine if phasing (i.e., launched spectrum) affects the efficiency of the power reaching the core plasma. The equation governing this technique is

$$W_e = W_0 - [W_0 - W_F] \times [1 - \exp(-t/\tau_{we})] \quad (1)$$

where W_0 is the energy at the starting point of the rise or fall of energy ($t = 0$), and W_F is the final energy that would be reached after several confinement times. By placing one of the laser pulses near the end of the RF pulse on and off periods, and placing the other laser pulse in between, three measurements are obtained from which W_0 , W_F and τ_{We} can be derived in principal for each on and each off period.

ELECTRON PRESSURE RESPONSE FOR HEATING AND CO-CURRENT DRIVE PHASING — $k_\phi = 14 \text{ m}^{-1}$ AND -7 m^{-1}

Discharge conditions were selected for providing a near constant density condition over the time of interest of HHFW modulation and the $P_e(r = 0)$ time traces were observed with the lasers synched with the RF pulses as indicated in Fig.1. Initial

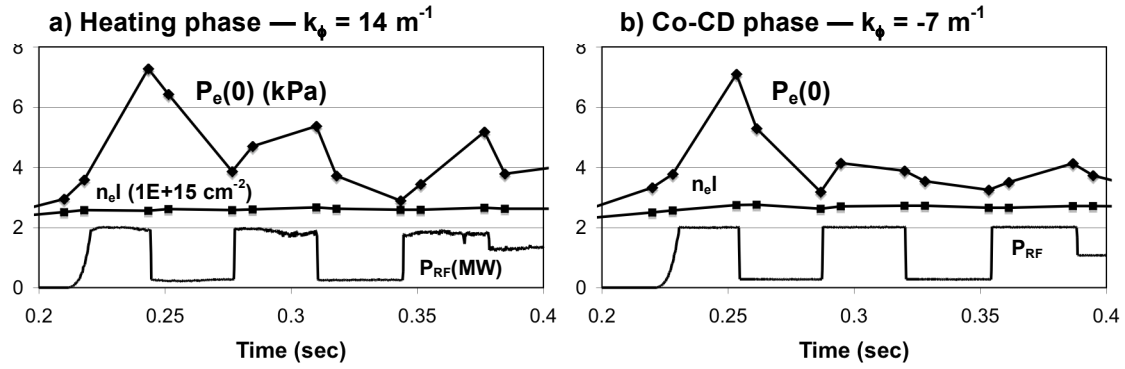


Figure 1. $P_e(r = 0)$ versus time for a) $k_\phi = 14 \text{ m}^{-1}$ (Shot 112699) and b) $k_\phi = -7 \text{ m}^{-1}$ (Shot 112705). Gas = He, $I_p = 0.6 \text{ MA}$, $B_T = 0.45 \text{ T}$ for both cases.

attempts to apply Eq. 1 to the three measured $P_e(0)$ values for each rise or decay period for the RF pulses were not generally successful (e.g. note that $\tau_{Pe0} \approx \infty$ after the first RF pulse in Fig. 1a and is undefined during the second RF pulse of Fig. 1b) due to fluctuations of $P_e(0)$ caused by MHD instabilities and/or radial displacements.

The P_e radial profiles at the ends of the 1st and second 2nd pulses are given in Fig 2

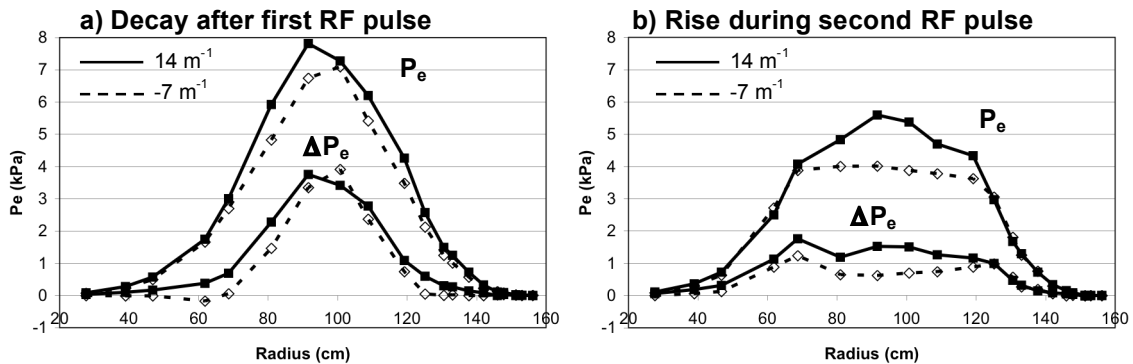


Figure 2. P_e versus radius at end of RF pulse and ΔP_e during a) the decay after the first RF pulse and b) the rise during second RF pulse. Discharge conditions as in Fig. 1.

along with the ΔP_e values over the associated decay and rise periods. For the first decay period the profiles are peaked and the ΔP_e profiles indicate that the RF deposition profile is somewhat narrower for the smaller k_ϕ as expected theoretically [3]. Minor profile perturbations can change $P_e(0)$ (the point near 100 cm) in Fig 2a and a sawtooth instability hollows out the pressure profile in Fig. 2b for the $k_\phi = -7 \text{ m}^{-1}$ case (the laser time is only 0.2 ms after the crash). To compensate for profile changes, the total electron energy contained in the plasma can be calculated versus time in order to determine values of τ_{W_e} .

ELECTRON STORED ENERGY AND ESTIMATED RF POWER DEPOSITION FOR $k_\phi = 14 \text{ m}^{-1}$ AND -7 m^{-1}

In order to determine $W_e(t)$, the Thomson scattering electron pressure $P_e(r, t)$ measurements taken on the midplane of the plasma are integrated over the EFIT magnetic surface defined volumes [4]. Generally, the $P_e(r)$ profile on the midplane does not exactly match the $P_{\text{Total}}(r)$ profile obtained with EFIT (the EFIT profile is usually somewhat broader and shifted somewhat outward in major radius) so the inner and outer (from R_0) values of $P_e(r)$ are each integrated over the EFIT defined volumes and the resulting W_e values are then averaged. $W_e(t)$ values thus obtained are given in Fig. 3 and compared with the corresponding $W_{\text{EF}}(t)$ values. A flattening of W_e during

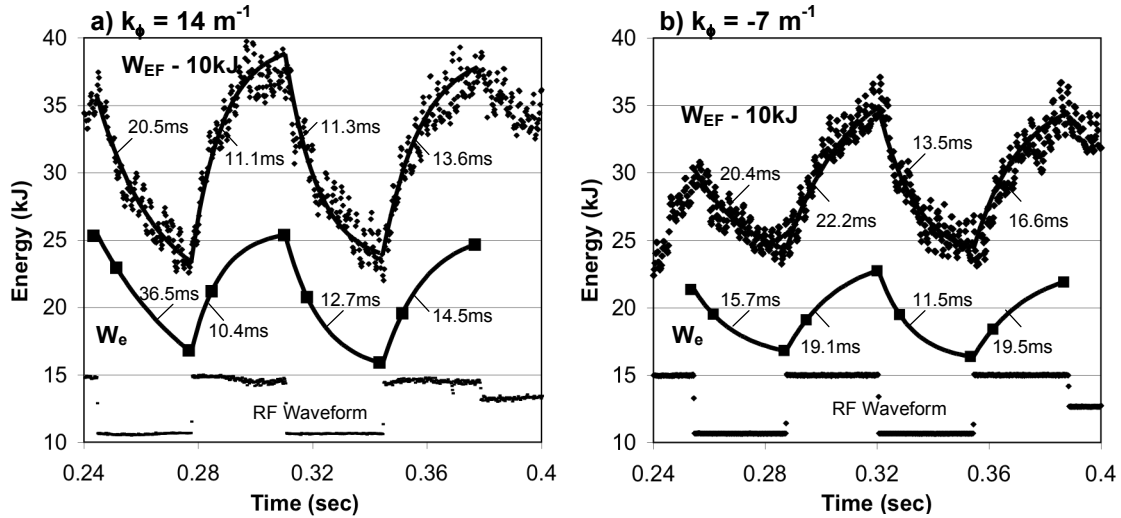


Figure 3. Electron stored energy W_e and total EFIT stored energy W_{EF} versus time for a) $k_\phi = 14 \text{ m}^{-1}$ and b) $k_\phi = -7 \text{ m}^{-1}$.

the second RF pulse for the -7 m^{-1} case is not observed as it was for $P_e(0)$ (see Fig. 1) and τ_{W_e} can be calculated straightforwardly. The resulting τ_{W_e} values for the W_e are qualitatively similar to the corresponding $\tau_{W_{\text{EF}}}$ values for W_{EF} .

An estimate of the core power deposition, ΔP_{RFD} , to the electrons to produce the observed W_e values during the RF pulses can be obtained from $\Delta W_{\text{eF}}/\tau_{W_e}$ where ΔW_{eF} is the difference in final W_{eF} values (Eq. 1) with and without the RF pulse, and

similarly from $\Delta W_{\text{EFF}}/\tau_{\text{WEF}}$ for the EFIT total stored energy. Table 1 summarizes the power estimates for the second and third RF pulses. These estimates indicate that the

TABLE 1. Estimate of power delivered to the bulk plasma from W_e and W_{EF} .

	ΔW (kJ) $\Delta W_{\text{eF}}/\Delta W_{\text{EFF}}$	τ (ms) $\tau_{\text{We}}/\tau_{\text{WEF}}$	ΔP_{RFD} (MW) $\Delta P_{\text{RFDe}}/\Delta P_{\text{RFDEF}}$	$\eta = \Delta P_{\text{RFD}}/\Delta P_{\text{RF}}$ η_e/η_{EF}
14 m ⁻¹ 2 nd pulse	15.1/19.4	10.4/11.1	1.45/1.75	0.84/1.01
14 m ⁻¹ 3 rd pulse	10.6/16.0	12.7/13.6	0.834/1.18	0.48/0.68
-7 m ⁻¹ 2 nd pulse	7.9/15.1	19.1/22.2	0.413/0.680	0.24/0.39
-7 m ⁻¹ 3 rd pulse	7.2/12.6	11.5/16.6	0.626/0.759	0.36/0.44

RF power reaching the electrons is on average about 3/4th that going to the bulk (η_e/η_{EF}), and that the delivered power to the electrons is substantially less than that launched from the antenna, especially in the -7 m⁻¹ co-current drive case.

CONCLUSIONS

The electron energy confinement time obtained from an integration of $P_e(r)$ over the EFIT magnetic surface defined volumes tracks reasonably well the total energy confinement time obtained from EFIT analysis for both the heating 14 m⁻¹ and co-current drive -7 m⁻¹ cases. However, considerable RF power does not reach the core of the plasma, especially in the longer wavelength -7 m⁻¹ case. Many processes are possibly contributing to this “surface” power loss – surface wave excitation, RF sheath dissipation, and parametric decay wave excitation to name a few. The presence of decay waves was detected in these cases and edge power loss, attributable to helium ion heating via the Bernstein wave, was determined from analysis of ERD (edge rotation diagnostic) measurements to be several hundred kilowatts and to increase with wavelength (16%, 23% of P_{RF} loss for 14 m⁻¹, -7 m⁻¹, respectively) [5,6]. The dramatic difference in apparent surface power loss between the two phasing cases considered here, suggests that accurate modeling of these cases should help to resolve the dominant loss mechanism(s) at play.

ACKNOWLEDGMENTS

This work is supported by DOE Contract No. DE-AC02-76CH03073.

REFERENCES

1. Ono, M., “High harmonic fast waves in high beta plasmas”, *Physics of Plasmas* **2**, 4075 (1995)
2. LeBlanc, B.P., et al., *Rev. of Scientific Instrum.* **74**, 1659 (2003)
3. Phillips, C.K., et al., *Bulletin of APS* **49**(8), Savanna, Ga, Nov. 2004, p223
4. Sabbagh, S.A., et al., *Nuclear Fusion* **41**, 1601 (2001)
5. Biewer, T. M., et al., *Bulletin of APS* **49**(8), Savanna, Ga, Nov. 2004, p324; to be published in *Physics of Plasmas* 2005.
6. Wilson, J.R., et al., This conference.

External Distribution

Plasma Research Laboratory, Australian National University, Australia
Professor I.R. Jones, Flinders University, Australia
Professor João Canalle, Instituto de Fisica DEQ/IF - UERJ, Brazil
Mr. Gerson O. Ludwig, Instituto Nacional de Pesquisas, Brazil
Dr. P.H. Sakanaka, Instituto Fisica, Brazil
The Librarian, Culham Science Center, England
Mrs. S.A. Hutchinson, JET Library, England
Professor M.N. Bussac, Ecole Polytechnique, France
Librarian, Max-Planck-Institut für Plasmaphysik, Germany
Jolan Moldvai, Reports Library, Hungarian Academy of Sciences, Central Research Institute
for Physics, Hungary
Dr. P. Kaw, Institute for Plasma Research, India
Ms. P.J. Pathak, Librarian, Institute for Plasma Research, India
Dr. Pandji Triadyaksa, Fakultas MIPA Universitas Diponegoro, Indonesia
Professor Sami Cuperman, Plasma Physics Group, Tel Aviv University, Israel
Ms. Clelia De Palo, Associazione EURATOM-ENEA, Italy
Dr. G. Grosso, Istituto di Fisica del Plasma, Italy
Librarian, Naka Fusion Research Establishment, JAERI, Japan
Library, Laboratory for Complex Energy Processes, Institute for Advanced Study,
Kyoto University, Japan
Research Information Center, National Institute for Fusion Science, Japan
Dr. O. Mitarai, Kyushu Tokai University, Japan
Dr. Jiangang Li, Institute of Plasma Physics, Chinese Academy of Sciences,
People's Republic of China
Professor Yuping Huo, School of Physical Science and Technology, People's Republic of China
Library, Academia Sinica, Institute of Plasma Physics, People's Republic of China
Librarian, Institute of Physics, Chinese Academy of Sciences, People's Republic of China
Dr. S. Mirnov, TRINITI, Troitsk, Russian Federation, Russia
Dr. V.S. Strelkov, Kurchatov Institute, Russian Federation, Russia
Professor Peter Lukac, Katedra Fyziky Plazmy MFF UK, Mlynska dolina F-2,
Komenskeho Univerzita, SK-842 15 Bratislava, Slovakia
Dr. G.S. Lee, Korea Basic Science Institute, South Korea
Dr. Rasulkhozha S. Sharafiddinov, Theoretical Physics Division, Institute of Nuclear Physics,
Uzbekistan
Institute for Plasma Research, University of Maryland, USA
Librarian, Fusion Energy Division, Oak Ridge National Laboratory, USA
Librarian, Institute of Fusion Studies, University of Texas, USA
Librarian, Magnetic Fusion Program, Lawrence Livermore National Laboratory, USA
Library, General Atomics, USA
Plasma Physics Group, Fusion Energy Research Program, University of California
at San Diego, USA
Plasma Physics Library, Columbia University, USA
Alkesh Punjabi, Center for Fusion Research and Training, Hampton University, USA
Dr. W.M. Stacey, Fusion Research Center, Georgia Institute of Technology, USA
Dr. John Willis, U.S. Department of Energy, Office of Fusion Energy Sciences, USA
Mr. Paul H. Wright, Indianapolis, Indiana, USA

The Princeton Plasma Physics Laboratory is operated
by Princeton University under contract
with the U.S. Department of Energy.

Information Services
Princeton Plasma Physics Laboratory
P.O. Box 451
Princeton, NJ 08543

Phone: 609-243-2750
Fax: 609-243-2751
e-mail: pppl_info@pppl.gov
Internet Address: <http://www.pppl.gov>