



A 15-T Pulsed Solenoid for a High-Power Target Experiment

**H. G. Kirk, I. Efthymiopoulos, A. Fabich, F. Haug, H. Pereira,
P. Titus, K. T. McDonald and J. R. J. Bennett**

Presented at the 11th European Particle Accelerator Conference (EPAC08)

Genoa, Italy

June 23-27, 2008

June 2008

Physics Department

Brookhaven National Laboratory

P.O. Box 5000

Upton, NY 11973-5000

www.bnl.gov

Notice: This manuscript has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-98CH10886 with the U.S. Department of Energy. The publisher by accepting the manuscript for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this manuscript, or allow others to do so, for United States Government purposes.

This preprint is intended for publication in a journal or proceedings. Since changes may be made before publication, it may not be cited or reproduced without the author's permission.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.



MAGNET DESIGN

Cost issues dictated a modest coil design. Power-supply limitations dictated a compact, low-inductance, high-packing-fraction design. A three-segment, layer-wound solenoid was chosen for the pulsed magnet. Each segment is 10-cm thick, 100-cm long and consists of 624 turns in 8 layers of 78 turns. The inner radii of the three segments are 15, 25 and 35 cm, and their masses are 750, 1250 and 1750 kg. The three segments are connected in series via external leads.

The conductor is 13-mm square, solid, cold-worked OFHC copper. Three different keystone geometries were used, one each for each coil segment.

Prior to each magnet pulse, liquid-nitrogen flows through 3-mm-thick axial and circumferential channels located between coil segments, as seen in Fig. 6. Only 2 of the 8 layers of a coil segment are in direct contact with the coolant, so that thermal conduction through 3 layers of conductors is relied on for cooling between layers 1 and 4, *etc.* Is it expected that the 30 MJ of heat deposited in the magnet during a single pulse can be removed in ≈ 30 min, which represents the minimum cycle time of the magnet.

COOLDOWN SIMULATION

To model the transient heat conduction coupled with LN_2 flow in the magnet, a finite-difference numerical program was written. The analysis starts with a specified mass flow of 100 g/s of LN_2 which is apportioned to the 4 sets of axial coolant channels based on the flow area of each channel. The model includes surface heat transfer characteristics based on 2-phase nitrogen flow. The cooling is actually pool cooling, and relies on circumferential channels to clear bubbles to the top of the magnet.

The model indicates that the magnet should be cooled in 20 min from its temperature of 120 K just after a 15-T pulse back to a temperature of 80 K for the next pulse, as shown in Fig. 3. To minimize activation of LN_2 by the proton beam, the liquid left in the magnet at 80 K will be flushed out by N_2 gas, requiring 10 min for this operation. Hence, the entire cooling cycle is $30 = 20 + 10$ min.

STRESS ANALYSIS

An ANSYS model [6] of the von Mises stress due to the Lorentz forces during 15-T operation is shown in Fig. 4. The peak stress is 133 MPa, well below the allowable of 200 MPa. However, the hoop stress is sufficient to pulling the coil apart slightly in the radial direction, so that appropriate parting planes were provided in the coil build.

The largest thermal stresses on the magnet occur during cooldown, when the axial tension can reach 50 MPa in the layers in contact with the coolant, as shown in Fig. 5. This stress is beyond the strength of epoxy-copper bonds, 07 Accelerator Technology Main Systems

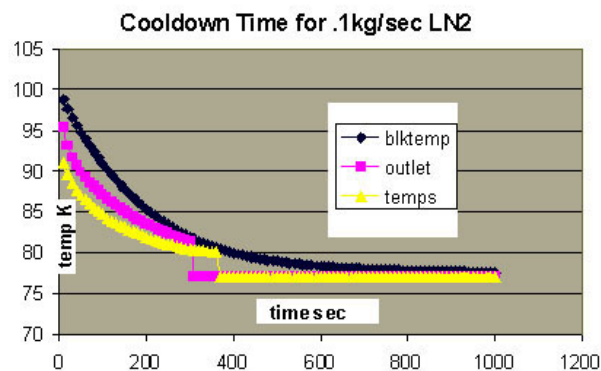


Figure 3: Model of the cooldown by LN_2 over 20 min of 40 K temperature rise of a 15-T magnet pulse.

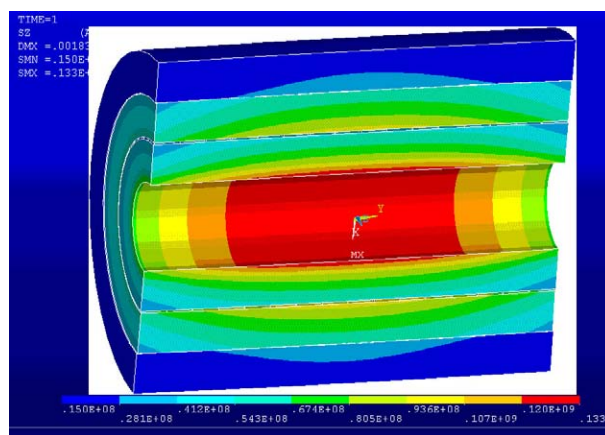


Figure 4: von Mises stress due to the Lorentz forces during 15-T operation.

so Kapton strips were placed between every eighth turn in the channel-facing layers to provide axial strain relief.

Many other sources of stress have been analyzed, including those in the cryostat, and all found to be of lesser significance [6].

MAGNET FABRICATION

The coil segments were wound, impregnated with epoxy, and nested together by Everson-Tesla of Nazareth, PA. The fabrication of the cryostat and the insertion of the coil segments into the cryostat was performed by CVIP in Emmaus, PA. The nested set of 3 coil segments is shown in Fig. 6, and the completed magnet is shown in Fig. 7.

PERFORMANCE

Initial tests of the magnet were performed at the MIT Pulsed Test Facility in March 2006. The magnet reached the design field of 15-T during a pulse of 7500 A and 550 V, as indicated in Fig. 8.

Integration of the magnet with the mercury jet system took place at MIT in February 2007, after which these com-

T09 Room-Temperature Magnets

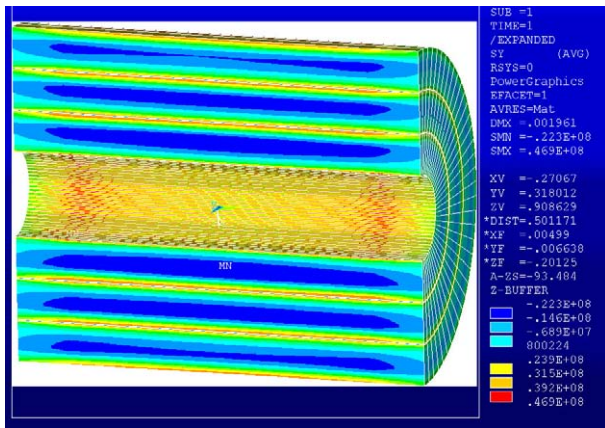


Figure 5: Axial stress during LN₂ cooldown.



Figure 6: The nested set of 3 coil segments. The axial and circumferential grooves are visible on the outer surface of the coil.

ponents were shipped to CERN. Commissioning of the magnet there occurred during Summer 2007, and the magnet was pulsed successfully 300 times during data collection of the MERIT experiment in Fall 2007 [7, 8].

ACKNOWLEDGMENTS

This work was supported in part by the US DOE Contract NO. DE-AC02-98CH10886.

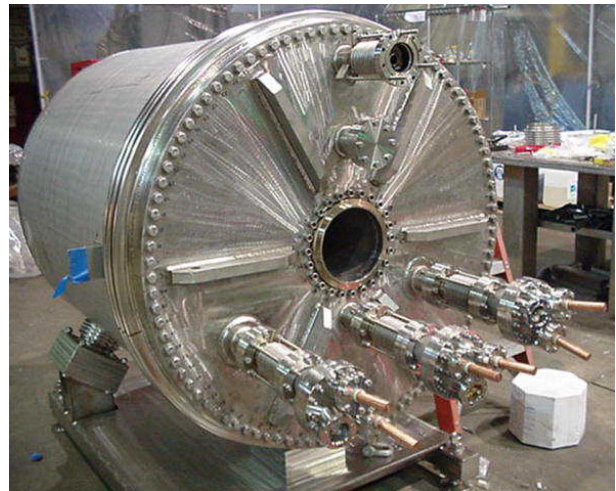


Figure 7: The 15-T magnet in its cryostat, January 2006.

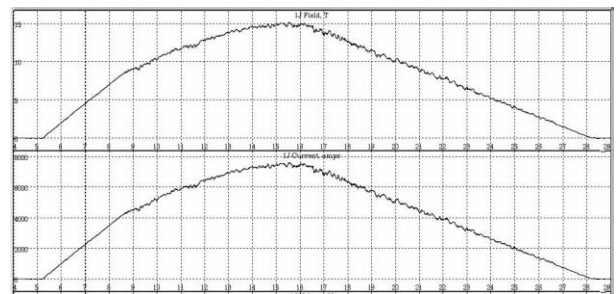


Figure 8: Magnetic field and current traces during a 15-T pulse at MIT, March 2006.

REFERENCES

- [1] J.R.J. Bennett *et al.*, *Studies of a Target System for a 4-MW, 24 GeV Proton Beam*, proposal to the CERN INTC Committee, INTC-P-186, (April. 26, 2004), http://puhep1.princeton.edu/mumu/target/cern_proposal.pdf
- [2] H.G. Kirk *et al.*, *A Proof-of-Principle Experiment for a High-Power Target System*, EPAC06 (these proceedings).
- [3] S. Osaki, R. Palmer, M. Zisman and J. Gallardo, eds., *Neutrino Factory Feasibility Study 2*, BNL-52623 (2001), Ch. 3, <http://www.cap.bnl.gov/mumu/studii/FS2-report.html>
- [4] K.T. McDonald *et al.*, *The Primary Target Facility for a Neutrino Factory Based on Muon Beams*, Proc. 2001 Part. Accel. Conf. (Chicago, IL, June 2001), p. 1583.
- [5] H.G. Kirk *et al.*, *A High-Field Pulsed Solenoid Magnet for Liquid Metal Target Studies*, Proc. 2003 Part. Accel. Conf. (Portland, OR, May 2003), p. 1631.
- [6] P. Titus, *E-951 15-T Pulsed Magnet for Mercury Target Development* (Sept. 6, 2002), http://www.hep.princeton.edu/mumu/target/MIT/desrev_090602.pdf
- [7] I. Efthymiopoulos *et al.*, *The MERIT (nTOF-11) High Intensity Liquid Mercury Target Experiment at the CERN PS*, these proceedings.
- [8] H.G. Kirk *et al.*, *The MERIT High-power Target Experiment at the CERN PS*, these proceedings.