

Erratum

Identification of the Dual Action Antihypertensive Drugs Using TFS-Based Support Vector Machines

Kentaro Kawai^{1,2} and Yoshimasa Takahashi^{1*}

¹Department of Knowledge-Based Information Engineering, Toyohashi University of Technology

1-1 Hibarigaoka, Tempaku-cho, Toyohashi 441-8580 Japan

²Current address: Kaken Pharmaceutical, 14 Shinomiya minamigawara-cho, Yamashina-ku Kyoto 607-8042 Japan

[Article in *Chem-Bio Informatics Journal*, 9, 41-51 (2009)]

The values for the characterization and the histogram in Figure 3 are incorrect. The figure for the article has to be corrected as below. We apologize for any trouble we may have caused you on the article.

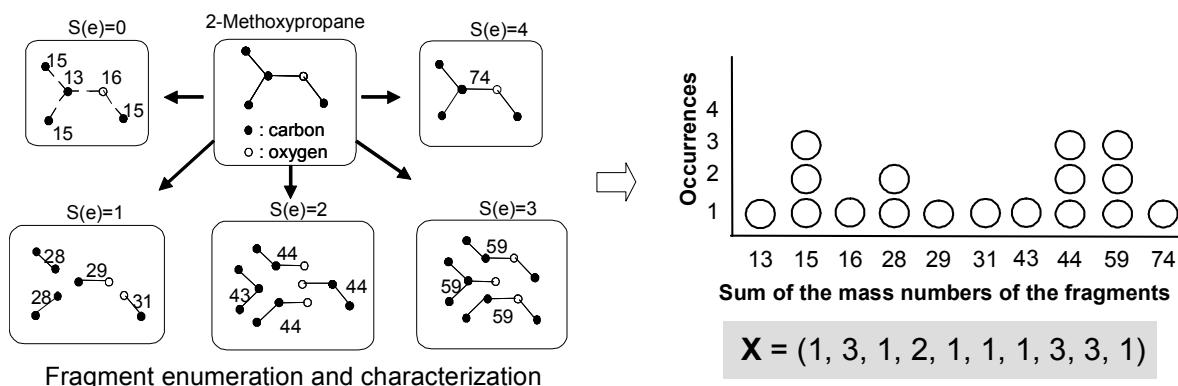


Figure 3. Illustrative example of TFS method.

First, enumerate all possible fragments of the given structure (2-methoxypropane). The number of edges of the fragments is described as $S(e)$. Then, characterize the fragments by a numerical quantity such as sum of mass numbers, degrees of the nodes, etc. The frequency distribution of characterized fragments is defined as a TFS.