



A robust hit-or-miss transform for template matching applied to very noisy astronomical images

B. Perret*, S. Lefèvre, Ch. Collet

Laboratoire des Sciences de l'Image, de l'Informatique et de la Télédétection (LSIIT), Université de Strasbourg, UMR CNRS 7005, France

ARTICLE INFO

Article history:

Received 24 July 2008

Received in revised form 23 February 2009

Accepted 28 February 2009

Keywords:

Hit-or-miss transform

Template matching

Mathematical morphology

Noisy environment

Astronomy

Low surface brightness galaxies

ABSTRACT

The morphological hit-or-miss transform (HMT) is a powerful tool for digital image analysis. Its recent extensions to grey level images have proven its ability to solve various template matching problems. In this paper we explore the capacity of various existing approaches to work in very noisy environments and discuss the generic methods used to improve their robustness to noise. We also propose a new formulation for a fuzzy morphological HMT which has been especially designed to deal with very noisy images. Our approach is validated through a pattern matching problem in astronomical images that consists of detecting very faint objects: low surface brightness galaxies. Despite their influence on the galactic evolution model, these objects remain mostly misunderstood by the astronomers. Due to their low signal to noise ratio, there is no automatic and reliable detection method yet. In this paper we introduce such a method based on the proposed hit-or-miss operator. The complete process is described starting from the building of a set of patterns until the reconstruction of a suitable map of detected objects. Implementation, running cost and optimisations are discussed. Outcomes have been examined by astronomers and compared to previous works. We have observed promising results in this difficult context for which mathematical morphology provides an original solution.

© 2009 Elsevier Ltd. All rights reserved.

1. Introduction

Template matching is a subject of interest in many computer vision processes and more generally in digital image analysis. In a general formulation it consists of searching for occurrences of a pre-defined object in an image. The objects of interest can have several different visual appearances which lead to several patterns sought in the images.

Among the methodologies to be used for pattern matching in digital images, mathematical morphology is particularly relevant since it performs spatial based image analysis relying on a pattern called structuring element (SE). The hit-or-miss transform (HMT) is a well-known morphological operator dedicated to template matching. Initially defined for binary images, it has been extended recently to greyscale images [1].

The use of the morphological HMT to perform template matching has grown during the recent years. Different formulations have been proposed and their application to various domains (medical

imaging [2,3], remote sensing [4,5], character recognition [6], and face localisation [7]) have proven their ability to provide a generic pattern matching method. However, it lacks robustness to noise and thus cannot be yet considered as a valid option for object detection in noisy images, even if some promising results have already been obtained in other challenging tasks such as galaxy segmentation and classification [8].

In this paper we propose a new formulation of the morphological HMT for grey level images. This formulation leads to a fuzzy result and can be applied even on very noisy images with a signal to noise ratio (SNR) below 0 dB. An application to detect faint objects: low surface brightness (LSB) galaxies [9] in astronomical images is also proposed. Results obtained with our new method are compared to those obtained with a traditional correlation algorithm. Detecting LSB galaxies is a very topical problem since astronomers lack information about them. It also well fits our interest of adapting the HMT to deal with very noisy environment for several reasons. The shape and the luminance profile of LSB galaxies are known, thus we can easily define a set of templates representing the various visual appearances they can take. However, their detection is a hard task as astronomical images have very heterogeneous content. The pixel dynamic can be very large with a brightness ratio between faintest and brightest objects coming up to 1:1000. The size variability of objects present in astronomical images can also be huge with objects

* Corresponding author.

E-mail addresses: perret@lsiit.u-strasbg.fr (B. Perret), lefevre@lsiit.u-strasbg.fr (S. Lefèvre), collet@lsiit.u-strasbg.fr (Ch. Collet).

covering only a few pixels to the whole image. Moreover, due to projective effects, different objects may overlap. Finally, to observe such faint objects as LSB galaxies, astronomers have to use long exposition time to collect as many photons as possible, thus leading to also collect a lot of noise.

This paper is organised as follows. First we briefly recall the basics of grey level morphology. Then we discuss the existing approaches for grey level HMT and their relative robustness to noise. We introduce a new formulation of the fuzzy HMT and give a methodology to involve this formulation in template matching applied to the detection of LSB galaxies in astronomical images. Finally results of this application are discussed and a comparison with existing astronomical results is proposed.

2. Review of existing HMT

We first recall the basics of grey level morphology, using the notations given by Naegel et al. [10]. Let E be a digital space (e.g. $E = \mathbb{Z}^n$). Let T be a set of grey levels. We require T to be a complete lattice with respect to the order “ \leq ” [11,12]. We will next assume that $T = \mathbb{R} \cup \{+\infty, -\infty\}$ or $T = \mathbb{Z} \cup \{+\infty, -\infty\}$. We denote \perp and \top , respectively, the lowest and the greatest elements of T .

Let I and G be two functions of T^E , the set of functions going from a subspace of E to T . We call the support of I ($\text{supp}(I)$) and dual support ($\text{supp}^*(I)$) the set of points where I is strictly above \perp and, respectively, under \top . Dilation \oplus and erosion \ominus of I by G at every point $p \in E$ are then given by

$$(I \oplus G)(p) = \sup_{k \in \text{supp}(G)} (I(p - k) + G(k)) \quad (1)$$

$$(I \ominus G)(p) = \inf_{k \in \text{supp}(G)} (I(p + k) - G(k)) \quad (2)$$

You can notice that these formulas can lead to disinclination like $+\infty$ plus $-\infty$. To keep consistency $+\infty$ plus $-\infty$ must be valued as $-\infty$ in Eq. (1) and as $+\infty$ in Eq. (2). Further readings about the grey level morphology can be found in Refs. [13,14]. We also define the dual G^* of the function $G \in T^E$ by

$$\begin{aligned} G^* : E &\rightarrow T \\ p &\rightarrow -G(-p) \end{aligned} \quad (3)$$

We now recall the principles of the HMT. It consists of searching for all pixels in an image which have a desired neighbourhood. It requires two SEs: the first one called *foreground* SE describes the shape and the second one called *background* SE is used to describe the spatial neighbourhood of this shape. In the binary case the interpretation of background and foreground is straightforward: the foreground is a set of pixels which has to be present in the image and the background is a set of pixels which has to be present in the complement of the image (see e.g. Fig. 1).

The extension of HMT to complete lattice requires to define *foreground* and *background* in such a general case. Thus several approaches have been proposed [15,10,3,16]. We will now present these approaches and discuss their resistance to noise in images with very low SNR ($\text{SNR} \leq 0$ db), the SNR being defined as signal energy divided by noise energy and is expressed in logarithmic scale

$$\text{SNR} = 10 \log_{10} \left(\frac{\sigma_s^2}{\sigma_n^2} \right) \text{ db}$$

with σ_s and σ_n being, respectively, the standard deviation of signal and noise.

2.1. Existing formulations of grey level HMT

We now introduce the various existing approaches to grey level HMT. For each operator, we discuss its ability to deal with poor SNR which is of primary importance for template matching in noisy images.

Let $I, F, B \in T^E$, F and B are the foreground and background SEs such that $F \leq B$ (i.e. $\forall p \in E, F(p) \leq B(p)$), I stands for the image.

2.1.1. Ronse's and Soille's HMT

The definition of Ronse's HMT given in Ref. [10] is

$$\text{RHMT}_{[F,B]}(I)(p) = \begin{cases} (I \ominus F)(p) & \text{if } (I \ominus F)(p) \geq (I \oplus B^*)(p) \neq +\infty \\ -\infty & \text{otherwise} \end{cases} \quad (4)$$

It assigns the maximum grey value where it is possible to fit both SEs.

Soille's definition given in Ref. [10] is an extension to functional SE of the initial version proposed in Ref. [1]

$$\text{SHMT}_{[F,B]}(I)(p) = \max\{(I \ominus F)(p) - (I \oplus B^*)(p), 0\} \quad (5)$$

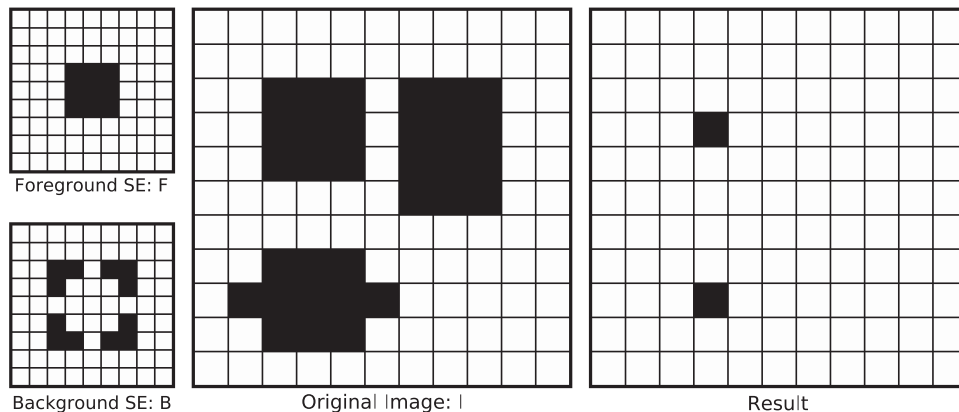


Fig. 1. Example of application of binary HMT to detect 3×3 squares with possible extension along edges. The top left image represents the foreground SE F , origin of the image is at the centre of the square. The bottom left image is the background SE B , with same origin as F . The middle image is the original image I . And the right image is the result of the HMT applied on I with SEs F and B .

We can observe that Soille's and Ronse's approaches are very similar. Soille's definition returns the difference between the highest and the lowest values where it is possible to fit the SEs. A unified formulation of these two approaches has been proposed in Ref. [10]. These approaches are adapted to perform pattern matching in quite good SNR environments, as we will discuss in the next section.

2.1.2. Barat et al.'s HMT

Barat et al. introduced in Ref. [3] an operation called *morphological probing* that is defined by

$$BHMT_{[F,B]}(I)(p) = (I \oplus B^*)(p) - (I \ominus F)(p) \quad (6)$$

It measures the distance between the best inner fit of F and the best outer fit of B . The lower is this value the best is the fit. This method presents no special noise related issue. One can note that there is a direct link between Barat's and Soille's HMT:

$$SHMT_{[F,B]}(I)(p) = -\min\{BHMT_{[F,B]}(I)(p), 0\} \quad (7)$$

thus Soille's HMT can be seen as a constrained version of Barat's HMT.

2.1.3. Khosravi-Schaefer's HMT

Khosravi and Schaefer introduced in Ref. [16] another version of HMT which uses a single SE and is equivalent to Barat et al.'s [3] HMT. It is defined by

$$\begin{aligned} KHMT_{[F]}(I)(p) &= (I \ominus F)(p) - (-I \ominus (-F))(p) \\ &= (I \ominus F)(p) - (I \oplus F^*)(p) \\ &= -BHMT_{[F,F]}(I)(p) \end{aligned} \quad (8)$$

$KHMT$ is always less or equal to 0 which is reached for a perfect match.

2.2. Generic solution to improve noise robustness

We place this study in the context of very noisy images, considering that images are generally affected by impulsive (or speckle), Gaussian or Poisson noise, we will first review the different generic solutions that have been proposed to deal with these kinds of noise. Another aspect of noise is the inherent slight variations or uncertainties of a real signal to the ideal model. These variations can be of different types: deformations (local or global), overlapping with other objects.

A simple solution to improve the tolerance to impulsive noise of all methods is to use rank operators instead of traditional erosion and dilation [16,17]. However, this solution implies to determine an appropriate rank for both dilation and erosion operations. Khosravi and Schaefer [16] have shown that a lower and upper bounds for the rank are given, respectively, by impulsive and Gaussian noise, but they did not provide a general formula to obtain these bounds. They also concluded that the effect of rank operator on Gaussian or Poisson noise is limited. Moreover impulsive noise can be strongly reduced by applying a rank filter (e.g. a median filter) before the pattern matching operator with negligible loss of quality [18].

Bloomberg and Maragos [17] proposed several solutions to improve robustness to noise and shape uncertainties. First idea is to perform a subsampling of both image and SEs. This solution is attractive (by considering less pixels and a Gaussian white noise, the probability of having a very noisy pixel under the SE is decreased),

it reduces small shape variations and saves computation time. Nevertheless it requires the resolution to be good enough so the subsampling will preserve major features of the shape. Another possibility is to perform a spatial decimation of the support of structural functions following a regular grid. The advantages of this method are the same as subsampling's ones, but it can be applied even at low resolution. Despite their capacities, these two methods are not sufficient to deal with very noisy images.

It is also possible to improve noise resistance of the morphological HMT by first dilating both foreground and background before performing erosions, as proposed by Bloomberg [17] in the binary case. In this case the foreground and the background overlap, thus it becomes easier to fit the SEs. However, the extension to the greyscale case is not trivial since we have to define the functional SE to be used.

Another way to improve robustness against noise and shape uncertainties is to provide less informative SEs (i.e. increase the distance between the foreground and the background). This is nearly equivalent to previous Bloomberg's method and can be the easiest way to work with low level SNR. Nevertheless this method fails at very low SNR as the SEs become so blurred that almost every configurations can provide a good match.

3. Robust hit-or-miss

Khosravi and Schaefer [16] have widely tested the use of KHMT with general rank order operators face to impulsive and Gaussian noise at various SNR. They explain the difficulty to find a suitable rank which is highly dependent on noise level and type. They have also explored partitioning of the template which is a kind of variation of the decimation method. Their conclusion joined Bloomberg's one saying that it should be done following a regular grid to obtain best performances. Nevertheless with all these improvements, performances still fall when the SNR goes under 19 dB [16].

The intrinsic difficulty of Soille's and Ronse's HMT to deal with high noise level is due to their rigid behaviour. Because we have no intermediate level between a true answer (object is detected at point p) and a false one (object is not detected) it is really hard to find the good SEs F and B to be used. In fact, in these HMT the main feature that provides a robustness to noise is the distance taken between F and B , the larger it is the more noise they can absorb and inversely. If F and B are too precise, too close then the transform nearly always gives a negative result. On the contrary, if F and B are too simple and the distance between each other is too large, this will lead to a high number of false positives.

Barat et al.'s HMT or Khosravi-Schaefer's HMT are quite different because they evaluate a distance, thus they look more flexible. Let us consider a given pixel expected to return a positive result (ground truth is available). However, applying Barat et al.'s HMT with the SEs F and B on this pixel may return a positive value t instead of a negative one. Then to ensure a positive result with Ronse's or Soille's HMT at this point we have to increase the distance between the two SEs by t (e.g. $F' = F - t$ and $B' = B$ or $F' = F$ and $B' = B + t$).

To sum up, Soille's and Ronse's HMT noise robustness is mainly determined by the distance between the two SEs. In Barat et al.'s HMT or Khosravi-Schaefer's HMT the distance between the two SEs is not important as it only results in a shift of the result. Thus the problem of determining a good distance is transformed in a problem of thresholding. The important point is to understand that these problems are equivalent and that all these formulations will react similarly when a lot of noise is present. None of them will deal with this case accurately. Fig. 2 illustrates the behaviour of the various HMTs when SNR is decreasing.

In the binary case Maragos [19] had the idea to introduce a fuzzy HMT that allows to keep well-defined SEs, close to each other and that works in noisy environments. It measures a ratio between the

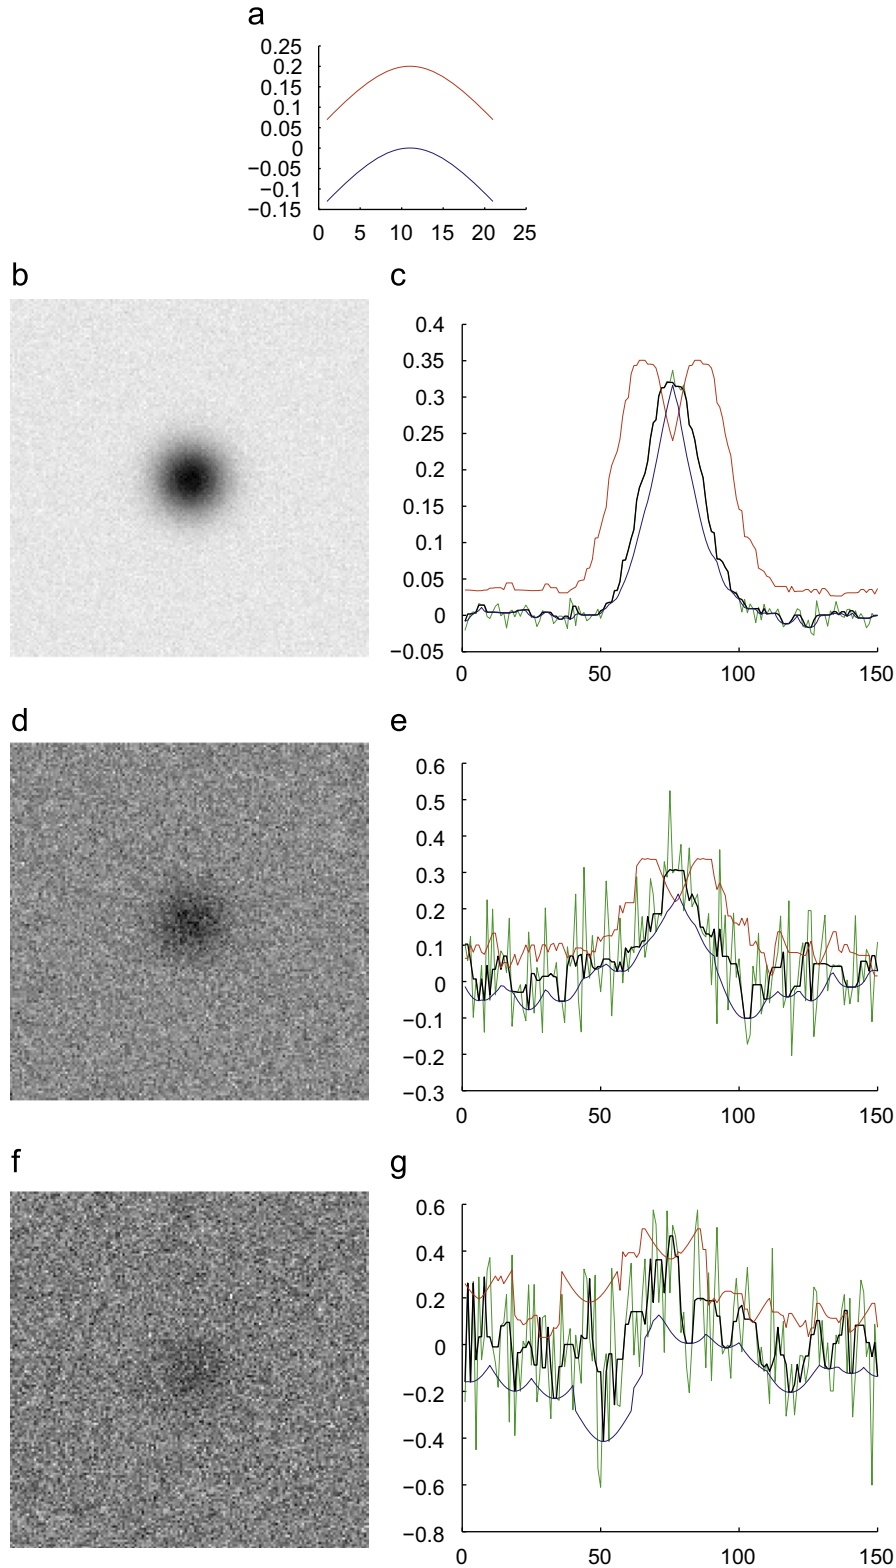


Fig. 2. This shows how the grey dilation and erosion and consequently the various formulations of HMT react when SNR falls. In this example a round shape with a Gaussian luminosity profile is hidden in noise. Image (a) is a one-dimensional cut of the foreground SE F (blue curve) and the background SE B (red curve). Then the left column shows images with decreasing SNR: ~ 20 dB for image (b), ~ 0 dB for image (d) and ~ -8 dB for image (f). Right column represents a one-dimensional cut of left images (in green), a cut of a median filtered (size 5×5) version of left image (black), the erosion of the filtered image by the foreground SE: $I \ominus F$ (in blue), and the dilation of the filtered image by the dual of the background SE $I \oplus B^*$ (in red). In plots (c) and (e), the red curve goes under the blue one, which would give a positive result for RHMT and SHMT. In the third case detection fails as the dilation and the erosion are disturbed by noise. One can note that if we increase the distance between SE F and B , for example, by defining $F' = F - k$ with k a grey value, the result would be equivalent to a vertical translation of the blue curve. And this is obviously useless as no vertical translation of the blue curve can make it cross the red curve only at the centre (i.e. if the blue line crosses the red one at another point this means that a false positive is detected). (For interpretation of the references to colour in this figure legend, the reader is referred to the web version of this article.)

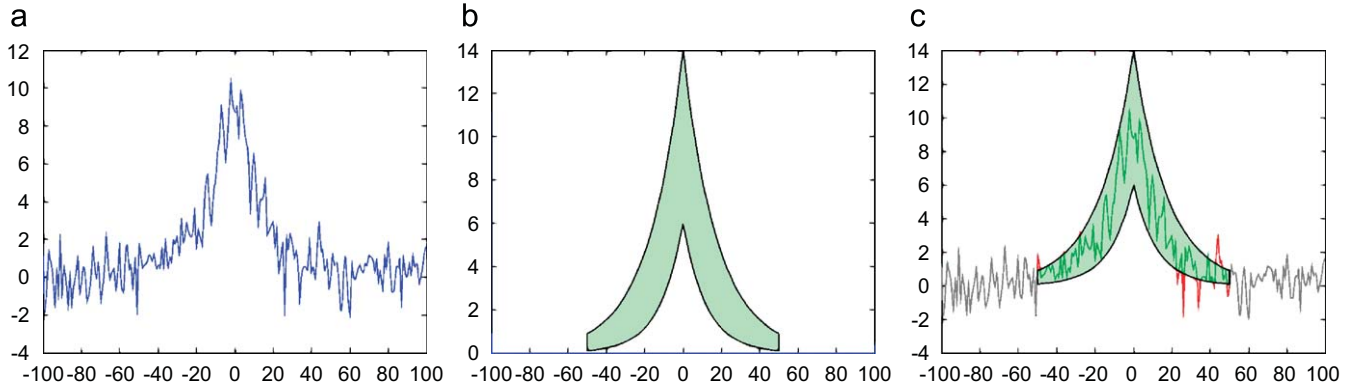


Fig. 3. Example of application of the fuzzy HMT to detect an exponential profile with Gaussian noise. Image (a) represents a 1D noisy signal ($\text{SNR} \approx 9 \text{ dB}$). Image (b) represents the uncertainty area defined by the 2 SEs F and B . Image (c) shows how well the pattern can fit the signal.

number of pixels that actually fit in the SEs and the total number of pixels contained in the SEs. Hence, instead of looking for the positions where the two SEs perfectly fit the image, we measure how well the SEs fit the image everywhere.

This can be extended to grey level images. For this we consider that the foreground and the background SEs describe, respectively, a local lower and upper bound for our image. The fitting process measures the ratio between the number of pixels in the neighbourhood between these two bounds and the total number of pixels in the area covered by the SEs. The result is a score between 0 (no points of the neighbourhood fits in the bounds) and 1 (all pixels of the image are between the lower and the upper bounds).

Whereas in Ronse's or Soille's approach the distance between SEs F and B and so their global shape has to be modified to tolerate noise, in this approach the SEs can keep a well-defined shape and tolerate fluctuations due to noise.

3.1. Definition

We now assume that T is an infinite set of grey values with a total ordering relation noted \leq (e.g. $T \subset \mathbb{Z}$). Formally we have to decompose the image I and the pair of SEs (F, B) as *suprema* of impulses and then consider each triplet (I, F, B) of impulses independently. Let $i_{(p,t)}$ be an impulse at point $p \in E$ of level $t \in T$

$$\forall x \in E, \quad i_{(p,t)}(x) = \begin{cases} t & \text{if } p = x \\ -\infty & \text{otherwise} \end{cases} \quad (9)$$

For practical reasons and because the positions of the impulses have no influence on the following definitions we write i_t for $i_{(0,t)}$. Let us write $IC_{F,B}^t(q)(v)$ the proposition “the pixel value v comprised between $F+t$ and $B+t$ at point q in the SE”, we have

$$IC_{F,B}^t(q)(v) \iff i_{F(q)+t} \leq i_v \leq i_{B(q)+t} \quad (10)$$

$$\iff i_v \oplus i_{B(q)+t} \leq t \leq i_v \ominus i_{F(q)+t} \quad (11)$$

A proof of equivalence between Eqs. (10) and (11) can be found in Ref. [10].

Let us define $S = \text{supp}(F) \cup \text{supp}^*(B)$ and card is the cardinality of a set. The proposed fuzzy HMT is then defined by

$$FHMT_{[F,B]}(I)(p) = \max_{t \in T} \frac{\text{card}\{q \in S \mid IC_{F,B}^t(q)(I(p+q))\}}{\text{card}(S)} \quad (12)$$

Hence it evaluates the best ratio of pixels satisfying the requirements of Proposition 11 with SEs F and B translated at all possible grey levels.

3.2. Implementation issues and parameters selection

Application of this operator is not straightforward. Indeed T is theoretically an infinite and perhaps continuous set, thus it is not directly possible to determine at which level t the score in Eq. (12) will be maximised. In fact the interval of possible values for t can be restricted quite easily by a local analysis of pixel values. For example, in Fig. 3, we can estimate that the upper part of our pattern should be between grey levels 6 and 10, and this can obviously be done by applying a simple mean filter and keep the resulting value as an estimation of t . One can then compute the score for different values near this estimation. This solution obviously depends on the possibility to extract a main feature from the pattern (for example “the peak” in Fig. 3) that can be used to perform a first and quick estimation of t .

Another issue is how to determine the ideal distance between the two SEs. Indeed it can be estimated from local noise information. For example, assuming that our image is corrupted by a Gaussian noise $\mathcal{N}(0, \sigma^2)$, and that we are looking for a pattern given by function P we can set $F = P - \sigma$ and $B = P + \sigma$. Then, according to noise statistic we can expect to have a matching score of about 68% in a correct case.

4. Application to astronomical images

Since the discovery of the various surface brightnesses of galaxies, astronomers have become more and more interested in a way to automatically detect very faint objects in astronomical images. LSB galaxies [9] have a central surface brightness higher than $22.5 \text{ mag/arcsec}^2$ (the magnitude is an inverse logarithmic brightness scale used in astronomy because of its similarities with the human eye behaviour, the arcsec is an angular distance). Traditional method of sigma clipping (i.e. adaptive thresholding method) used commonly in astronomy is not able to detect such objects as they are eliminated with background (see Section 4.2 for details on the sigma clipping method).

When searching for objects with a good SNR, astronomical images are quite easy to describe because they are mainly composed of bright objects on a dark background. Unfortunately several problems arise when approaching background signal level (i.e. looking at the early universe or at low brightness objects). The background is not flat over all the images, even in small images of about 512×512 pixels. Images are also affected by a Poisson noise (approximated by a Gaussian noise of mean 0 and deviation σ) and some salt and pepper noise. This last one may be caused by defect pixels on the CCD camera or more usually by cosmic rays. All these properties make the problem of LSB galaxies detection hard to solve (see Fig. 6).

The whole process of LSB galaxies detection is decomposed in two steps: first a segmentation map of interesting objects is built, and then the objects present in segmentation map are characterised using physical criteria. Astronomers of the Centre de Données astronomiques de Strasbourg¹ (CDS) have recently developed such a tool that performs an automatic characterisation of astronomical objects [20]. This tool has been tested to detect LSB galaxies based on segmentation map obtained using a Markovian quadtree segmentation tool [21]. The Bayesian approach is useful to involve a prior on noise but does not deal with large shape knowledge, thus we proposed a new method to compute more selective segmentation map using FHMT.

In this section we describe a method based on FHMT to automatically build a segmentation map of potential LSB galaxies. The algorithm is decomposed into several steps. First we need to build several patterns corresponding to LSB galaxies of various shapes and orientations. Because the objects we are looking for are very close to the background in terms of photometry, we also need to compute a precise map of the background (i.e. evaluate the intrinsic luminosity of the sky at all points). Next the original image is preprocessed with a median filter to reduce noise. Filtered image, background map, and pattern set are then used to calculate FHMT. The result is thresholded and the original shape of LSB galaxies is reconstructed.

4.1. Description of patterns

We now describe how LSB galaxies are modelled. They are elliptic objects with a luminosity profile roughly following an exponential law. Let us consider a two-dimensional discrete plane E . Let $(c_x, c_y) \in E$ be the centre of the galaxy, then we have for all $p \in E$ the following expression for the luminance:

$$LSB(p_x, p_y) = \mu_0 e^{-1/R_0 \sqrt{(p_x - c_x)^2 + b^2(p_y - c_y)^2}} \quad (13)$$

where μ_0 is the central surface brightness given in pixel value unit, R_0 is the scale length, $b \in]0; 1]$ defines the ellipticity of the model. Using this model we are able to generate several patterns with various brightnesses, elongations, orientations and scale lengths.

Because of the non-constant background and the huge number of possible central brightnesses we choose to generate patterns at a normalised brightness ($\mu_0 = 1$) and dynamically stretch patterns depending on local background value and noise statistics. Since there is a high correlation between the noise standard deviation σ_n and magnitude scale, brightness t will then be expressed as a factor k of the noise deviation: $t = k * \sigma_n + \mu_b$ with μ_b the background level.

We considered scale length from 1.33 to 10.33 arcsec by step of 1.0 arcsec (the equivalence between arcsec and pixel unit can be computed from image file header). We quantify 14 orientations between 0 and π . The final set of SEs was obtained by combining all possible scale lengths, elongations and orientations while avoiding identical cases induced by symmetries. It is composed of 640 templates (see e.g.² Figs. 4 and 5).

All SEs are then convolved with a Gaussian kernel of 5×5 pixels to reproduce the point spread function (PSF) of the telescope (seeing and optics deformations). This is an approximation because PSF depends on the image and the location in the image, but this approximation is negligible in comparison with shape uncertainties.

Finally each pattern is composed of two SEs of same orientation and elongation. We choose to take the foreground SE to have a scale length of 1 arcsec smaller than the background one. The distance



Fig. 4. Example of SEs obtained with a variation of orientations convolved with a Gaussian point spread function.



Fig. 5. Example of SEs obtained with a variation of elongations convolved with a Gaussian point spread function.

between the SEs is adjusted dynamically with respect to local noise statistics (see Section 4.2.).

4.2. Computation of FHMT

Once we have generated all different patterns, we estimate background and noise of the image by following a regular grid of 32×32 pixels in a window of 256×256 pixels with the sigma clipping method widely used in astronomical imaging. This method performs in two steps: in the first one it computes the average value μ (mean or median) and deviation σ of pixels in the estimation window, then in the second step it masks all pixels for which the value is greater (resp. lower) than $\mu + k\sigma$ (resp. $\mu - k\sigma$), and goes back to step one until convergence. Parameter k gives the confidence interval with respect to noise power, a value of 3 is generally used.³ Background and noise estimation cannot be performed over all pixels because of its prohibitive computation time. Nevertheless as these parameters

¹ <http://cdsweb.u-strasbg.fr/>

² All images are given in inverse grey level to save ink.

³ See SExtractor documentation for details: <http://terapix.iap.fr/>

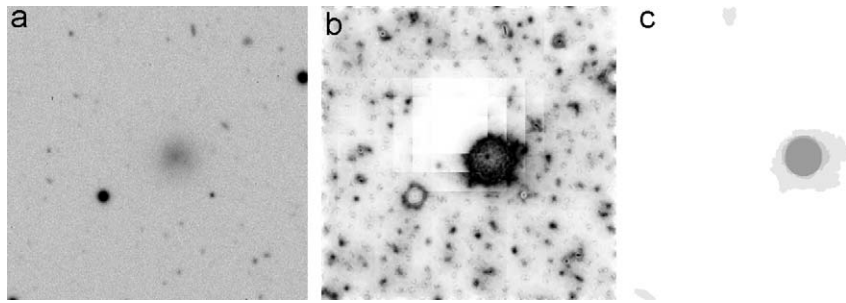


Fig. 6. Application of the FHMT to LSB galaxy detection, an easy case. (a) Original image of 512×512 pixels with a LSB galaxy at centre. One can note that the pixel dynamic has been adjusted manually so the LSB galaxy becomes visible. (b) Score map obtained after the application of the FHMT. The LSB galaxy is clearly visible. We can observe that both the centre and the wings of the object give a good score. (c) Thresholded and reconstructed map. The final map contains different classes proportional to the object brightness. This allows deblending capabilities for overlapping objects having different brightnesses.

vary slowly over the image, we can have a good estimation of them by simply interpolating values of the background grid.

Computation of scores is done according to the principles given in Section 3.2. Estimation of the best grey level t for the vertical translation of the SEs is done using a median filter (5×5). We transpose foreground (resp. background) SE to local background level and stretch it so that its highest value is $t - \sigma$ (resp. $t + \sigma$) with σ the local deviation of noise. Matching scores between each pattern and median filtered image is then computed and the best one is kept as the result (Figs. 6 and 10).

4.3. Reconstruction of score map

In the next step, the score map is thresholded. The threshold value offers a good tuning option and was determined to minimise false negative rate and, with less importance, minimise false positive rate. We found that a score of 80% offers a good compromise. The use of the same threshold for every observation is not a problem. As all parameters of the algorithm are set automatically according to observation parameters and statistics, the score gives an absolute measure which is independent of the observation.

Once we have a binary map, we need to reconstruct the final map. To do this, each pixel of the binary map is dilated by the support of the pattern that gives the maximum score in this position (Figs. 6 and 10). Scheme of the procedure is given in Fig. 7.

To improve map's precision we could have used a geodesic reconstruction instead of a simple dilation so the reconstructed areas would exactly fit the detected objects. In our case this is useless because the next step of the algorithm rather prefers to work with idealised shapes instead of precise but noisy boundaries.

4.4. Optimisation

Without any optimisation the proposed algorithm takes about 20 min to compute the segmentation map on an image of 512×512 pixels. This time includes estimation of background and generation of the 640 patterns. The code is written in Java and executed on a Pentium IV computer. In this section we propose several optimisations to improve algorithm performances:

- We perform a spatial decimation of patterns using Bloomberg's method [17]; we choose to keep one pixel every two.
- As the resolution is sufficient in our images, we perform segmentation in a sub-grid of the images at scale 1:2.
- Score computation and thresholding are done simultaneously, so the computation of a fit can be discarded as soon as threshold becomes unreachable.
- Last optimisation is heuristic and comes from the idea that we

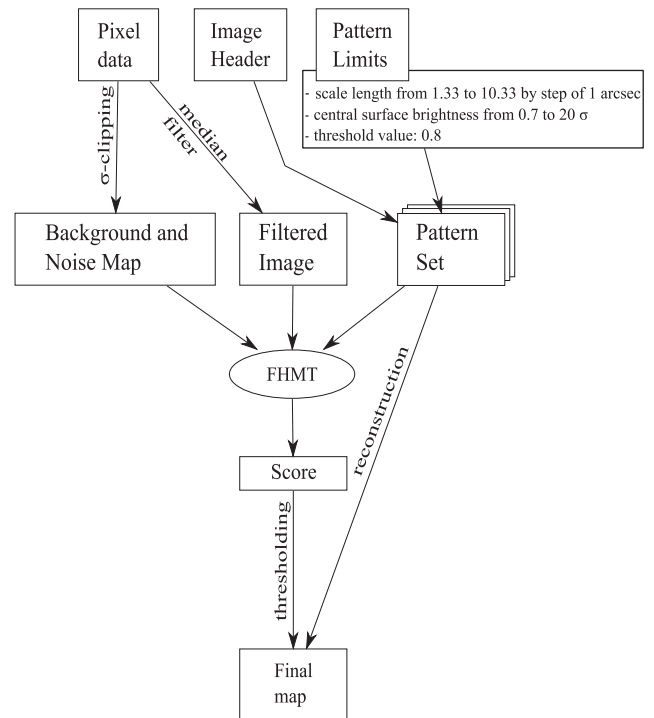


Fig. 7. Scheme of the pattern matching method. The algorithm takes three inputs: the image pixel values, the image file header, and physical limits. The whole procedure is automatic.

can perform the segmentation in two steps. The first step will make a fast selection of possibly interesting pixels, second step will perform a full computation for selected pixels. During the first step we will segment the images using only a few patterns (we take only circular patterns, orientation and elongation are not considered) and a low threshold (60%). During the second step we segment pixels selected at the first step with the full process (all patterns, threshold at 80%).

With all these optimisations we are able to compute a segmentation map of a 512×512 images in about 2 min, which is ten times faster than original algorithm. Detection maps obtained with and without optimisation are nearly the same. One can notice that last optimisation is purely heuristic and so we cannot assert that target will never be lost. However, we have compared results obtained with both the original strategy and this 2-step approach, and we have

observed only minor differences (small difference in the shape or size of the detected targets). In these experiments no target was lost.

5. Results

In this section, the method was evaluated through two different datasets. First, to compensate the lack of ground truth in real images, we created a simulated dataset. However, we also involved a set of real images which have already been analysed by experts [22] to show the relevance of the proposed approach in this context. Due to the lack of related work and the clear inability of existing HMT to deal with this problem (as shown in Section 3), evaluation can rely only on quantitative and qualitative analysis (and thus cannot involve any comparison).

5.1. Simulated dataset

It is very important for astronomers to know the detection limits of the algorithm they are using. This information is used to determine the statistical bias of their conclusions due to selection effects of the algorithm.

A batch of tests has been designed with astronomers of the CDS to determine the detection limits of our algorithm in terms of brightness and scale length. These tests apply on simulated images of LSB galaxies for which we know the ground truth. The algorithm used to generate artificial LSB galaxies is nearly the same as the one used to build the SEs in the detection algorithm. We used a Gaussian function to reproduce PSF. We also had the possibility to add other astronomical objects in our images (like stars or bright galaxies) to test robustness of our algorithm in crowded part of the sky. Noise power and pixels statistics used to create images were taken directly from a real astronomical image. Fig. 8 shows the examples of simulated images of LSB galaxies.

Our test protocol is divided into three parts (Fig. 8), and we applied the algorithm on:

- images containing only one LSB galaxy (one test per couple (brightness, radius)) to determine absolute limits;
- images containing one LSB galaxy and a bright star (one test per couple (brightness, radius)) to study reaction in a sparse environment;
- images containing one LSB galaxy and between three and seven other objects located randomly over the images (21 tests per couple (brightness, radius)) to test robustness in crowded environment.

The LSB galaxies do not have strict boundaries, thus we choose to define their limits as the ellipse where the signal has lost 95% of its central energy. The area enclosed in this radius gives us the reference truth to evaluate the map proposed by the detection algorithm. Let C_{ref} be the set of pixels present in the reference map. There may be several objects in the segmentation map provided by the method, thus we choose to keep the connected component having the largest intersection with the reference map as the final result and denote it by C .

Finally we used an F1-measure [23] to evaluate the correctness of the detection. The latter combines the *precision* and the *recall* measures to obtain a score between 0 and 1. It is given by

$$\text{F1-measure} = \frac{2 * \text{precision} * \text{recall}}{\text{precision} + \text{recall}} \quad (14)$$

with *precision* defined as

$$\text{precision} = \frac{\text{card}(C \cap C_{ref})}{\text{card}(C)} \quad (15)$$

and *recall* defined as

$$\text{recall} = \frac{\text{card}(C \cap C_{ref})}{\text{card}(C_{ref})} \quad (16)$$

Experiments have shown that an F1-measure value equal to at least 0.4 is sufficient for the following steps to perform accurately.

We have determined that the FHMT algorithm is able to detect LSB galaxy up to a scale length of 2 arcsec (this is PSF limit anyway) and a central surface brightness of $\sim 26.2 \text{ mag/arcsec}^2$ (0.7σ over sky background level which is nearly equivalent to 0 dB SNR). Moreover detection is nearly not affected by other objects except if the wing of another bright object covers the LSB galaxy (the two objects overlap and the LSB galaxy is drowned in the other object luminosity).

We have also compared the results of our method to those obtained with a traditional correlation method [18]. This was done by replacing the FHMT measure by the correlation one and adjusting the threshold value in the process to ensure the best possible results. The correlation based method performs well until 1.5σ over sky background level (Fig. 9), i.e. its robustness to noise, is lower than the FHMT one. This shows that (robust) morphological approaches can be relevant alternatives to statistical methods even in such noisy environments.

5.2. Real dataset

Next the FHMT operator was applied on a test set of 16 blue band (a filter centred at wavelength of 4500 Å corresponding to blue colour is used) images of 2048×4096 pixels coming from the INT Wide Angle Survey.⁴ The dataset covers the Virgo cluster which has the advantage to be close to the Galaxy and in a relatively sparse area of the sky. Moreover the population of LSB galaxies in this survey has already been studied by astronomers [22], which gives us a reference catalogue to evaluate our results.

The algorithm has been run over the whole dataset and segmentation maps were used as inputs for the characterisation tool of the CDS: DetectLSB. At the end of the process, this tool provides HTML files describing potential LSB galaxies found and XML catalogues in the VOTable standard [20].

A full analysis of the result for two images was performed in collaboration with an astronomer. The reference catalogue contains nine LSB galaxies in these areas. The algorithm proposed 23 candidates. It found six objects of the reference catalogue and provided eight new LSB galaxies. The spurious detections were mainly due to artefacts created by two close sources (when wings of two close objects intersect, they locally create an artificial raise of luminosity) or very distant galaxies (the brightness of the galaxy is then decreased by the absorption of intergalactic environment). This leads to a total of 17 interesting objects (nine already known and eight newly discovered) for the two images. The recall of the method is then 0.82 and the precision is 0.6. One can note that the three LSB galaxies missed from the reference catalogue were correctly segmented by FHMT but were rejected by the characterisation algorithm. Because LSB galaxies detection is a very challenging task for which no automatic solution has been proposed yet, these scores can be considered as really good.

The traditional correlation method performed on these two images, using the same methodology as in Section 5.1, proposed 54 candidates. It found 9 of the 17 LSB galaxies previously mentioned, yielding a recovery rate equal to 53%. The false positives were mainly multiple detections (two or more close objects are fused in a single one in the final map) or very distant galaxies. Fig. 10 shows a

⁴ http://www.ast.cam.ac.uk/~rgm/int_sur/

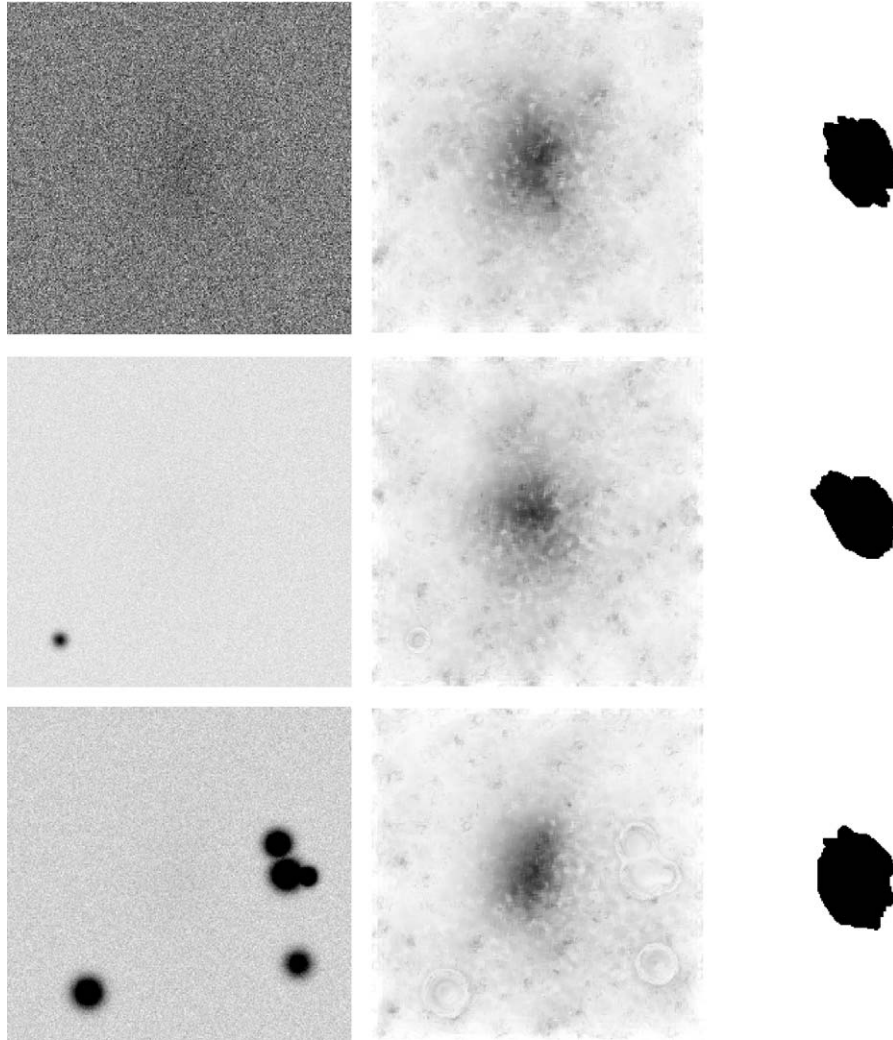


Fig. 8. Example of simulated images for the three steps of our evaluation protocol. The LSB galaxies displayed in the centre of each image have a scale length of 10 pixels and a central surface brightness of $25.7 \text{ mag/arcsec}^2$ (one σ over sky background level with σ the deviation of noise). The SNR is very low about -1 dB . The first line shows the results for a single LSB galaxy, the second line for a LSB galaxy with a star near it, and the third line for a LSB galaxy surrounded by five stars randomly placed. The first column shows the simulated image, the second one shows the result of FHMT, and the third one the final map.

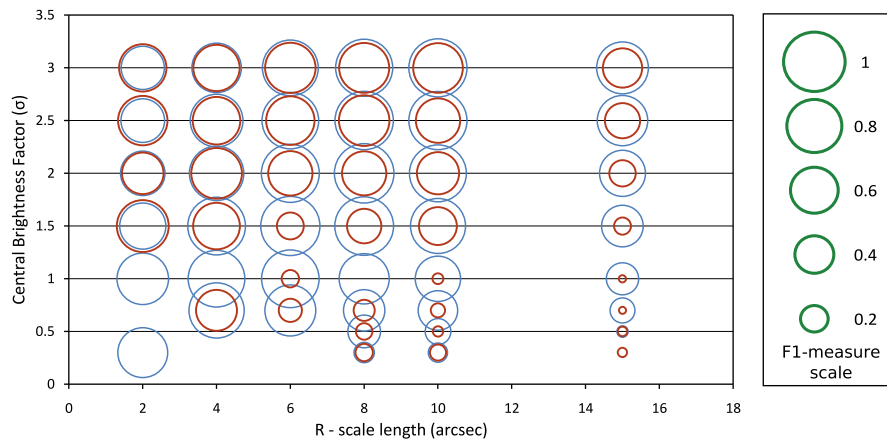


Fig. 9. Comparison of the results obtained using the FHMT (blue circles) and the correlation (red circles) on simulated LSB galaxies. For each couple (radius, brightness factor), the circle area is proportional to the F1-measure value. The green circles on the right side give a reference scale. The experiments showed that the detection can be considered to be effective when the F1-measure is above or equal to 0.4. While the performances of the correlation drops under 1.5σ , the FHMT remains effective until 0.5σ over sky background level. (For interpretation of the references to colour in this figure legend, the reader is referred to the web version of this article.)

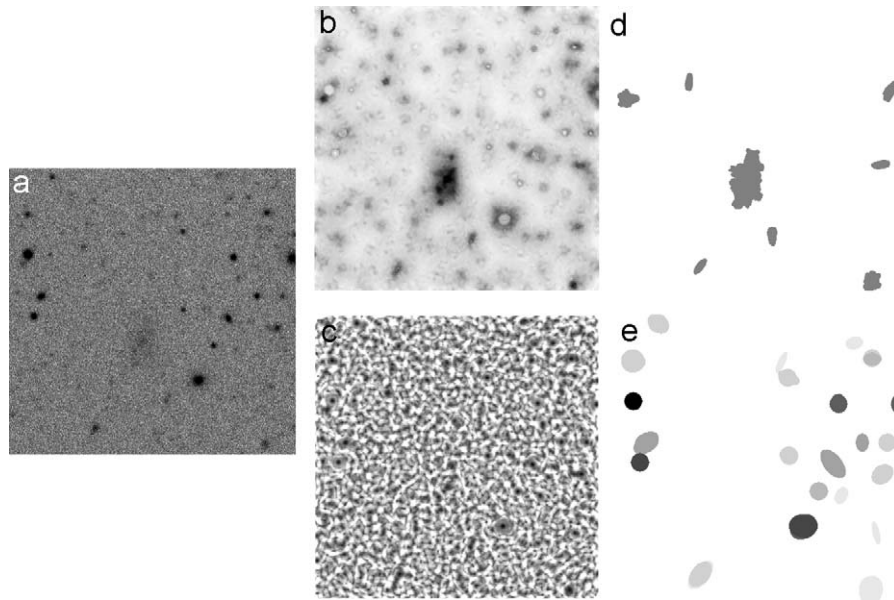


Fig. 10. Example of comparison between the FHMT and the traditional correlation for LSB galaxies detection. (a) Original image of 512×512 pixels with a LSB galaxy at the centre. One can note that the pixel dynamic has been adjusted manually: the LSB galaxy is still hard to view. (b) Score map obtained after the application of the FHMT. The LSB is clearly visible. We can observe that the object appears to be composed of several small ellipses, which is due to the irregular aspect of the galaxy. (c) Thresholded and reconstructed map for the FHMT. There is clearly one false positive on this map on the top right border (it corresponds to the wings of a brighter object). Other objects detected have to be deeply analysed to determine their physical nature. (d) Score map obtained after the application of the correlation. (e) Thresholded and reconstructed map for the correlation. In spite of the high number of false positives, the main target is lost.

comparison between results given by the FHMT and the correlation on a real small image extracted from one of the two big images.

We also applied the FHMT to the 16 images from the real dataset. We performed a cross correlation between the new catalogue obtained with the FHMT and the existing one: the FHMT was able to recover 87% of the LSB galaxies contained in the reference catalogue and several new candidates were proposed. These candidates have to be analysed now by astronomers' community before any conclusion can be drawn on them.

6. Conclusion

We have addressed the particular problem of template matching in very noisy environment using the morphological HMT. We have shown that the existing formulations of HMT are not adapted to do this, thus we proposed a formulation of a "fuzzy" HMT. It relies on two SEs: the foreground and the background one and consists of measuring the ratio of the image area that fit the SEs compared to the total area covered by the SEs.

We have described how it can be applied to a real and still unsolved case in astronomical imaging: the automatic detection of LSB galaxies. We have tested the new HMT on simulated and real images and showed that our method performs better than a traditional correlation method. Our results have been analysed by an astronomer and confirmed that FHMT is suitable for pattern matching at very low SNR.

Thereby the field of application of the morphological HMT has been extended to very noisy images for which statistical approaches are generally preferred. The process we described can be easily adapted for pattern matching in other domains such as radar imaging. Moreover, in case of noisy multispectral data, the proposed operator should be extended to multivariate mathematical morphology [24].

Acknowledgements

The authors thank Bernd Vollmer (Observatoire de Strasbourg, Université de Strasbourg), François Bonnarel (Centre de Données astronomiques de Strasbourg, Université de Strasbourg), Mireille Louys (Laboratoire des Sciences de l'Images, de l'Informatique et de la Télédétection, Université de Strasbourg) and Wim Van Driel (Observatoire de Meudon, Institut d'Astrophysique de Paris) for their enlightening discussion about LSB galaxies and the various aspects of astronomical image analysis.

References

- [1] P. Soille, *Morphological Image Analysis: Principles and Applications*, Springer, New York, Inc., Secaucus, NJ, USA, 2003.
- [2] B. Naegel, N. Passat, C. Ronse, Grey-level hit-or-miss transforms—part ii: application to angiographic image processing, *Pattern Recognition* 40 (2) (2007) 648–658.
- [3] C. Barat, C. Ducottet, M. Jourlin, Pattern matching using morphological probing, in: *International Conference on Image Processing*, vol. 1, 2003, pp. 369–372.
- [4] S. Lefèvre, J. Weber, D. Sheeren, Automatic building extraction in VHR images using advanced morphological operators, in: *IEEE/ISPRS Joint Workshop on Remote Sensing and Data Fusion over Urban Areas (URBAN)*, Paris, 2007.
- [5] A. Puissant, J. Weber, S. Lefèvre, Coastline extraction in VHR imagery using mathematical morphology with spatial and spectral knowledge, in: *ISPRS International Congress*, Beijing, 2008.
- [6] D.S. Bloomberg, L.M. Vincent, Pattern matching using the blur hit-miss transform, *Journal of Electronic Imaging* 9 (2000) 140–150.
- [7] B. Raducanu, M. Graña, A grayscale hit-or-miss transform based on level sets, in: *International Conference on Image Processing*, 2000, pp. 931–933.
- [8] E. Aptoula, S. Lefèvre, C. Collet, Mathematical morphology applied to the segmentation and classification of galaxies in multispectral images, in: *European Signal Processing Conference (EUSIPCO)*, 2006.
- [9] G. Bothun, C. Impey, S. McGaugh, Low-surface-brightness galaxies: hidden galaxies revealed, *Publication of the Astronomical Society of the Pacific* 109 (1997) 745–758.
- [10] B. Naegel, N. Passat, C. Ronse, Grey-level hit-or-miss transforms—part i: unified theory, *Pattern Recognition* 40 (2) (2007) 635–647.
- [11] H.J.A.M. Heijmans, Theoretical aspects of gray-level morphology, *IEEE Transaction on Pattern Analysis and Machine Intelligence* 13 (6) (1991) 568–582.

- [12] C. Ronse, Why mathematical morphology needs complete lattices, *Signal Processing* 21 (2) (1990) 129–154.
- [13] J. Serra, Morphological image operators, *Society for Industrial and Applied Mathematics Review* 38 (1) (1996) 178–179.
- [14] S.R. Sternberg, Grayscale morphology, *Computer Vision, Graphics, and Image Processing* 35 (3) (1986) 333–355.
- [15] C. Ronse, A lattice-theoretical morphological view on template extraction in images, *Journal of Visual Communication & Image Representation* 7 (3) (1996) 273–295.
- [16] M. Khosravi, R. Schafer, Template matching based on a grayscale hit-or-miss transform, *IEEE Transactions on Image Processing* 5 (5) (1996) 1060–1066.
- [17] D.S. Bloomberg, P. Maragos, Generalized hit-miss operations, in: *SPIE Conference 1350, Image Algebra and Morphological Image Processing*, San Diego, CA, 1990, pp. 116–128.
- [18] R. Gonzalez, R. Woods, *Digital Image Processing*, Prentice-Hall, Englewood, 2002 (ISBN: 0-20-118075-8).
- [19] P. Maragos, Optimal morphological approaches to image matching and object detection, in: *International Conference on Computer Vision*, 1988, pp. 695–699.
- [20] M. Louys, B. Perret, B. Vollmer, F. Bonnarel, S. Lefèvre, C. Collet, LSB galaxies detection using Markovian segmentation on astronomical images, in: *ASP Conference Series, Astronomical Data Analysis Software and Systems XVII*, London, UK, 2007, pp. 116–128.
- [21] C. Collet, F. Flitti, Variations on Markovian quadtree model for multiband astronomical image analysis, in: *International Symposium on Applied Stochastic Models and Data Analysis*, Brest, France, 2005.
- [22] S. Sabatini, J. Davies, R. Scaramella, R. Smith, M. Baes, S.M. Linder, S. Roberts, V. Testa, The dwarf LSB galaxy population of the Virgo cluster–I. The faint-end slope of the luminosity function, *Monthly Notices of the Royal Astronomical Society* 341 (2003) 981–992.
- [23] T.Y. Chen, F.-C. Kuo, R. Merkel, On the statistical properties of the F-measure, in: *Proceedings of the Fourth International Conference on Quality Software, QSIC*, 2004, pp. 146–153.
- [24] E. Aptoula, S. Lefèvre, A comparative study on multivariate mathematical morphology, *Pattern Recognition* 40 (11) (2007) 2914–2929.

About the Author—BENJAMIN PERRET received the M.Sc. in Computer Science from Louis Pasteur University, Strasbourg, France, in 2007, where he is currently pursuing a Ph.D. degree in Computer Science with a thesis on galaxy classification using Bayesian modelling, Markov chains Monte Carlo methods and mathematical morphology in multispectral astronomical images.

About the Author—SÉBASTIEN LEFÈVRE received in 1999 the M.S. and Engineering degrees from the University of Technology of Compiègne in Computer Engineering, and in 2002 the Ph.D. degree from the University of Tours in Computer Science. He is currently an Assistant Professor in the Department of Computer Science and the LSIIT, University Louis Pasteur, Strasbourg. From 1999 to 2002 he was with AtosOrigin as a Research and Development Engineer. In 2003, he was with the Polytechnical School of the University of Tours as an Assistant Professor. His research interests are in multispectral image and colour video processing, multimedia analysis and indexing, and mathematical morphology.

About the Author—CHRISTOPHE JEAN-FRANÇOIS COLLET was born in 1966 in France. He graduated from the Université Paris-Sud Orsay in 1989 (Master in Signal Processing, DEA) and received a Ph.D. in Image Processing from the University of Toulon in 1992. His thesis research was carried out at the Ecole Nationale Supérieure des Télécommunications de Bretagne (ENST-Br) and at the French Naval Academy. He spent 8 years at the French Naval Academy and was the Chairman of the Laboratory GTS “Groupe de Traitement du Signal” from 1994 to 2000, where he developed hierarchical Markovian approaches for SONAR image segmentation. Since 2001 he holds a Full Professor position at Strasbourg University (LSIIT UMR CNRS 7005). His major research interests include multi-image segmentation and classification with hierarchical approaches (wavelet decomposition, multigrid optimization, multiscale modeling), Bayesian inference, Markovian approaches for pattern recognition, Bayesian networks, with a particular focus on astronomy (hyperspectral) and medical (multimodal) images.